



US011234463B2

(12) **United States Patent**
DePiano et al.

(10) **Patent No.:** **US 11,234,463 B2**

(45) **Date of Patent:** **Feb. 1, 2022**

(54) **ATOMIZER FOR AN AEROSOL DELIVERY DEVICE AND RELATED INPUT, AEROSOL PRODUCTION ASSEMBLY, CARTRIDGE, AND METHOD**

(52) **U.S. Cl.**
CPC *A24F 40/46* (2020.01); *A24F 40/44* (2020.01); *A24F 40/70* (2020.01); *B21D 53/06* (2013.01);

(Continued)

(71) Applicant: **RAI Strategic Holdings, Inc.**,
Winston-Salem, NC (US)

(58) **Field of Classification Search**
None
See application file for complete search history.

(72) Inventors: **John DePiano**, Burlington, MA (US);
David Smith, Needham, MA (US);
Patsy Coppola, Bedford, MA (US);
Charles Jacob Novak, III,
Winston-Salem, NC (US); **Steven Lee Alderman**,
Lewisville, NC (US); **James William McClellan**,
Hollis, NH (US); **John William Wolber**,
Nashua, NH (US); **Frank S. Silveira**,
Wilmington, MA (US); **Michael Laine**,
Newburyport, MA (US); **Paul A. Brinkley**,
Winston-Salem, NC (US); **Grady Lance Dooly**,
Winston-Salem, NC (US)

(56) **References Cited**
U.S. PATENT DOCUMENTS

1,771,366 A 7/1930 Wyss et al.
2,057,353 A 10/1936 Whittemore, Jr.
(Continued)

FOREIGN PATENT DOCUMENTS

AU 276250 7/1965
CA 2 641 869 5/2010
(Continued)

OTHER PUBLICATIONS

International Search Report and Written Opinion of the International Searching Authority for corresponding International Application No. PCT/US2015/017108 dated Jun. 3, 2015.

(Continued)

Primary Examiner — Ibrahim A Abraham
Assistant Examiner — Gyoungyun Bae

(74) *Attorney, Agent, or Firm* — Womble Bond Dickinson (US) LLP

(73) Assignee: **RAI Strategic Holdings, Inc.**,
Winston-Salem, NC (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 551 days.

(21) Appl. No.: **15/890,696**

(22) Filed: **Feb. 7, 2018**

(65) **Prior Publication Data**
US 2018/0168233 A1 Jun. 21, 2018

Related U.S. Application Data

(62) Division of application No. 14/194,233, filed on Feb. 28, 2014, now Pat. No. 9,918,495.


(51) **Int. Cl.**
A24F 47/00 (2020.01)
B21D 53/06 (2006.01)

(Continued)

(57) **ABSTRACT**

The present disclosure relates to atomizers for an aerosol delivery device such as a smoking article. The atomizer may include a liquid transport element and a wire extending along at least a portion of a longitudinal length thereof. The wire may define contact portions configured to engage heater terminals and a heating portion configured to produce heat. The heating portion may include a variable coil spacing. In other atomizers, the wire may extend at least partially

(Continued)

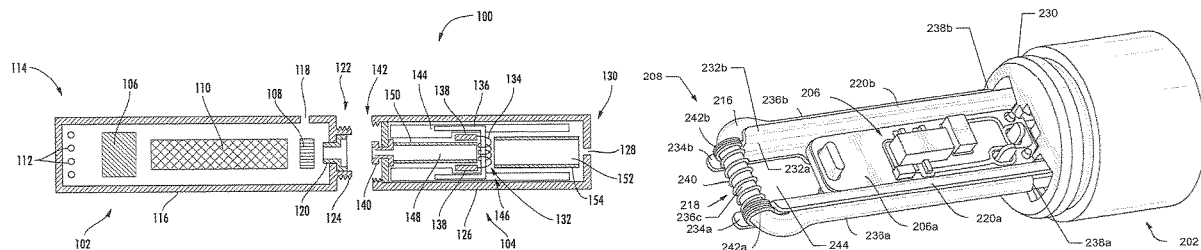

through the liquid transport element proximate the contact portions. Related inputs, cartridges, aerosol production assemblies, and methods of forming atomizers are also provided.

27 Claims, 27 Drawing Sheets

(51) **Int. Cl.**

- F22B 1/28** (2006.01)
- H01C 17/02** (2006.01)
- H01C 17/04** (2006.01)
- A24F 40/46** (2020.01)
- A24F 40/44** (2020.01)
- A24F 40/70** (2020.01)
- A24F 40/10** (2020.01)

(52) **U.S. Cl.**

- CPC **F22B 1/282** (2013.01); **H01C 17/02** (2013.01); **H01C 17/04** (2013.01); **A24F 40/10** (2020.01); **Y10T 29/4935** (2015.01); **Y10T 29/49083** (2015.01)

(56)

References Cited

U.S. PATENT DOCUMENTS

2,104,266	A	1/1938	McCormick
2,805,669	A	9/1957	Meriro
3,200,819	A	4/1963	Gilbert
3,398,754	A	6/1966	Tughan
3,316,919	A	5/1967	Green et al.
3,378,673	A	4/1968	Hopper
3,419,015	A	12/1968	Wochnowski
3,424,171	A	1/1969	Rooker
3,476,118	A	11/1969	Luttich
3,678,249	A	7/1972	Lennox
4,054,145	A	10/1977	Berndt et al.
4,131,117	A	12/1978	Kite et al.
4,150,677	A	4/1979	Osborne
4,190,046	A	2/1980	Virag
4,219,032	A	8/1980	Tabatznik et al.
4,259,970	A	4/1981	Green, Jr.
4,284,089	A	8/1981	Ray
4,303,083	A	12/1981	Burruss, Jr.
4,449,541	A	5/1984	Mays et al.
4,506,682	A	3/1985	Muller
4,635,651	A	1/1987	Jacobs
4,667,084	A	5/1987	Regge
4,674,519	A	6/1987	Keritsis et al.
4,708,151	A	11/1987	Shelar
4,714,082	A	12/1987	Banerjee et al.
4,735,217	A	4/1988	Gerth et al.
4,756,318	A	7/1988	Clearman et al.
4,771,795	A	9/1988	White et al.
4,776,353	A	10/1988	Lilja et al.
4,793,365	A	12/1988	Sensabaugh, Jr. et al.
4,800,903	A	1/1989	Ray et al.
4,819,665	A	4/1989	Roberts et al.
4,821,749	A	4/1989	Toft et al.
4,830,028	A	5/1989	Lawson et al.
4,836,224	A	6/1989	Lawson et al.
4,836,225	A	6/1989	Sudoh
4,846,199	A	7/1989	Rose
4,848,374	A	7/1989	Chard et al.
4,848,376	A	7/1989	Lilja et al.
4,874,000	A	10/1989	Tamol et al.
4,880,018	A	11/1989	Graves, Jr. et al.
4,887,619	A	12/1989	Burcham, Jr. et al.
4,907,606	A	3/1990	Lilja et al.
4,913,168	A	4/1990	Potter et al.
4,917,119	A	4/1990	Potter et al.
4,917,128	A	4/1990	Clearman et al.
4,922,901	A	5/1990	Brooks et al.

4,924,888	A	5/1990	Perfetti et al.
4,928,714	A	5/1990	Shannon
4,938,236	A	7/1990	Banerjee et al.
4,941,483	A	7/1990	Ridings et al.
4,941,484	A	7/1990	Clapp et al.
4,945,931	A	8/1990	Gori
4,947,874	A	8/1990	Brooks et al.
4,947,875	A	8/1990	Brooks et al.
4,972,854	A	11/1990	Kiernan et al.
4,972,855	A	11/1990	Kuriyama et al.
4,986,286	A	1/1991	Roberts et al.
4,987,906	A	1/1991	Young et al.
5,005,593	A	4/1991	Fagg
5,019,122	A	5/1991	Clearman et al.
5,022,416	A	6/1991	Watson
5,038,458	A	8/1991	Wagoner et al.
5,042,510	A	8/1991	Curtiss et al.
5,056,537	A	10/1991	Brown et al.
5,060,669	A	10/1991	White et al.
5,060,671	A	10/1991	Counts et al.
5,065,775	A	11/1991	Fagg
5,072,744	A	12/1991	Luke et al.
5,074,319	A	12/1991	White et al.
5,076,296	A	12/1991	Nystrom et al.
5,093,894	A	3/1992	Deevi et al.
5,095,921	A	3/1992	Losee et al.
5,097,850	A	3/1992	Braunshsteyn et al.
5,099,862	A	3/1992	White et al.
5,099,864	A	3/1992	Young et al.
5,103,842	A	4/1992	Strang et al.
5,121,757	A	6/1992	White et al.
5,129,409	A	7/1992	White et al.
5,131,415	A	7/1992	Munoz et al.
5,144,962	A	8/1992	Counts et al.
5,143,097	A	9/1992	Sohn et al.
5,146,934	A	9/1992	Deevi et al.
5,159,940	A	11/1992	Hayward et al.
5,159,942	A	11/1992	Brinkley et al.
5,179,966	A	1/1993	Losee et al.
5,211,684	A	5/1993	Shannon et al.
5,220,930	A	6/1993	Gentry
5,224,498	A	7/1993	Deevi et al.
5,228,460	A	7/1993	Sprinkel, Jr. et al.
5,230,354	A	7/1993	Smith et al.
5,235,992	A	8/1993	Sensabaugh
5,243,999	A	9/1993	Smith
5,246,018	A	9/1993	Deevi et al.
5,249,586	A	10/1993	Morgan et al.
5,261,424	A	11/1993	Sprinkel, Jr.
5,269,327	A	12/1993	Counts et al.
5,285,798	A	2/1994	Banerjee et al.
5,293,883	A	3/1994	Edwards
5,301,694	A	4/1994	Raymond
5,303,720	A	4/1994	Banerjee et al.
5,318,050	A	6/1994	Gonzalez-Parra et al.
5,322,075	A	6/1994	Deevi et al.
5,322,076	A	6/1994	Brinkley et al.
5,339,838	A	8/1994	Young et al.
5,345,951	A	9/1994	Serrano et al.
5,353,813	A	10/1994	Deevi et al.
5,357,984	A	10/1994	Farrier et al.
5,360,023	A	11/1994	Blakley et al.
5,369,723	A	11/1994	Counts et al.
5,372,148	A	12/1994	McCafferty et al.
5,377,698	A	1/1995	Litzinger et al.
5,388,574	A	2/1995	Ingebretsen et al.
5,388,594	A	2/1995	Counts et al.
5,408,574	A	4/1995	Deevi et al.
5,435,186	A	7/1995	Terhune et al.
5,435,325	A	7/1995	Clapp et al.
5,445,169	A	8/1995	Brinkley et al.
5,468,266	A	11/1995	Bensalem et al.
5,468,936	A	11/1995	Deevi et al.
5,479,948	A	1/1996	Counts et al.
5,498,850	A	3/1996	Das
5,498,855	A	3/1996	Deevi et al.
5,499,636	A	3/1996	Baggett, Jr. et al.
5,501,237	A	3/1996	Young et al.
5,505,214	A	4/1996	Collins et al.

(56)

References Cited

U.S. PATENT DOCUMENTS

5,515,842	A	5/1996	Ramseyer et al.	6,810,883	B2	11/2004	Felter et al.
5,530,225	A	6/1996	Hajaligol	6,854,461	B2	2/2005	Nichols
5,551,450	A	9/1996	Hemsley	6,854,470	B1	2/2005	Pu
5,551,451	A	9/1996	Riggs et al.	6,994,096	B2	2/2006	Rostami et al.
5,564,442	A	10/1996	MacDonald et al.	7,011,096	B2	3/2006	Li et al.
5,573,692	A	11/1996	Das et al.	7,017,585	B2	3/2006	Li et al.
5,591,368	A	1/1997	Fleischhauer et al.	7,025,066	B2	4/2006	Lawson et al.
5,593,792	A	1/1997	Farrier et al.	7,117,867	B2	10/2006	Cox et al.
5,595,577	A	1/1997	Bensalem et al.	7,163,015	B2	1/2007	Moffitt
5,596,706	A	1/1997	Sikk et al.	7,173,322	B2	2/2007	Cox et al.
5,611,360	A	3/1997	Tang	7,185,659	B2	3/2007	Sharpe et al.
5,613,504	A	3/1997	Collins et al.	7,234,470	B2	6/2007	Yang
5,613,505	A	3/1997	Campbell et al.	7,290,549	B2	11/2007	Banerjee et al.
5,649,552	A	7/1997	Cho et al.	7,293,565	B2	11/2007	Griffin et al.
5,649,554	A	7/1997	Sprinkel et al.	7,392,809	B2	7/2008	Larson et al.
5,659,656	A	8/1997	Das	7,513,253	B2	4/2009	Kobayashi et al.
5,665,262	A	9/1997	Hajaligol et al.	7,647,932	B2	1/2010	Cantrell et al.
5,666,976	A	9/1997	Adams et al.	7,690,385	B2	4/2010	Moffitt
5,666,977	A	9/1997	Higgins et al.	7,692,123	B2	4/2010	Baba et al.
5,666,978	A	9/1997	Counts et al.	7,726,320	B2	6/2010	Robinson et al.
5,687,746	A	11/1997	Rose et al.	7,775,459	B2	8/2010	Martens, III et al.
5,692,525	A	12/1997	Counts et al.	7,810,505	B2	10/2010	Yang
5,692,526	A	12/1997	Adams et al.	7,832,410	B2	11/2010	Hon
5,708,258	A	1/1998	Counts et al.	7,845,359	B2	12/2010	Montaser
5,711,320	A	1/1998	Martin	7,878,209	B2	2/2011	Newbery et al.
5,726,421	A	3/1998	Fleischhauer et al.	7,896,006	B2	3/2011	Hamano et al.
5,727,571	A	3/1998	Meiring et al.	7,918,109	B2	4/2011	Pinkowski et al.
5,730,158	A	3/1998	Collins et al.	8,066,010	B2	11/2011	Newbery et al.
5,750,964	A	5/1998	Counts et al.	8,079,371	B2	12/2011	Robinson et al.
5,799,663	A	9/1998	Gross et al.	8,127,772	B2	3/2012	Montaser
5,816,263	A	10/1998	Counts et al.	8,156,944	B2	4/2012	Han
5,819,756	A	10/1998	Mielordt	8,314,591	B2	11/2012	Terry et al.
5,829,453	A	11/1998	White et al.	8,365,742	B2	2/2013	Hon
5,865,185	A	2/1999	Collins et al.	8,375,957	B2	2/2013	Hon
5,865,186	A	2/1999	Volsey, II	8,393,331	B2	3/2013	Hon
5,878,752	A	3/1999	Adams et al.	8,402,976	B2	3/2013	Fernando et al.
5,880,439	A	3/1999	Deevi et al.	D685,522	S	7/2013	Potter et al.
5,894,841	A	4/1999	Voges	8,499,766	B1	8/2013	Newton
5,915,387	A	7/1999	Baggett, Jr. et al.	8,528,569	B1	9/2013	Newton
5,934,289	A	8/1999	Watkins et al.	8,550,069	B2	10/2013	Alelov
5,954,979	A	9/1999	Counts et al.	8,559,800	B2	10/2013	Ellis et al.
5,967,148	A	10/1999	Harris et al.	8,794,231	B2	8/2014	Thorens et al.
6,026,820	A	2/2000	Baggett, Jr. et al.	8,851,081	B2	10/2014	Fernando et al.
6,033,623	A	3/2000	Deevi et al.	8,997,753	B2	4/2015	Li et al.
6,040,560	A	3/2000	Fleischhauer et al.	9,277,770	B2	3/2016	DePiano et al.
6,053,176	A	4/2000	Adams et al.	9,439,456	B2*	9/2016	Liu A24F 40/46
6,089,857	A	7/2000	Matsuura et al.	2002/0146242	A1	10/2002	Vieira
6,095,153	A	8/2000	Kessler et al.	2003/0131859	A1	7/2003	Li et al.
6,116,247	A	9/2000	Banyasz et al.	2003/0226837	A1	12/2003	Blake et al.
6,119,700	A	9/2000	Fleischhauer et al.	2004/0020500	A1	2/2004	Wrenn et al.
6,125,853	A	10/2000	Susa et al.	2004/0118401	A1	6/2004	Smith et al.
6,125,855	A	10/2000	Nevett et al.	2004/0129280	A1	7/2004	Woodson et al.
6,125,866	A	10/2000	Nichols et al.	2004/0149296	A1	8/2004	Rostami et al.
6,155,268	A	12/2000	Takeuchi	2004/0200488	A1	10/2004	Felter et al.
6,164,287	A	12/2000	White	2004/0226568	A1	11/2004	Takeuchi et al.
6,182,670	B1	2/2001	White	2004/0255965	A1	12/2004	Perfetti et al.
6,196,218	B1	3/2001	Voges	2005/0016549	A1	1/2005	Banerjee et al.
6,196,219	B1	3/2001	Hess et al.	2005/0016550	A1	1/2005	Katase
6,216,706	B1	4/2001	Kumar et al.	2005/0066986	A1	3/2005	Nestor et al.
6,289,898	B1	9/2001	Fournier et al.	2005/0172976	A1	8/2005	Newman et al.
6,349,729	B1	2/2002	Pham	2005/0274390	A1	12/2005	Banerjee et al.
6,357,671	B1	3/2002	Cewers	2006/0016453	A1	1/2006	Kim
6,418,938	B1	7/2002	Fleischhauer et al.	2006/0057527	A1	3/2006	Adair et al.
6,446,426	B1	8/2002	Sweeney et al.	2006/0070633	A1	4/2006	Rostami et al.
6,532,965	B1	3/2003	Abhulimen et al.	2006/0162733	A1	7/2006	McGrath et al.
6,598,607	B2	7/2003	Adiga et al.	2006/0185687	A1	8/2006	Hearn et al.
6,601,776	B1	8/2003	Oljaca et al.	2006/0196518	A1	9/2006	Hon
6,615,840	B1	9/2003	Fournier et al.	2007/0074734	A1	4/2007	Braunshyteyn et al.
6,688,313	B2	2/2004	Wrenn et al.	2007/0102013	A1	5/2007	Adams et al.
6,701,936	B2	3/2004	Shafer et al.	2007/0215167	A1	9/2007	Crooks et al.
6,715,494	B1	4/2004	McCoy	2007/0283972	A1	12/2007	Monsees et al.
6,730,832	B1	5/2004	Dominguez et al.	2008/0085103	A1	4/2008	Beland et al.
6,772,756	B2	8/2004	Shayan	2008/0092912	A1	4/2008	Robinson et al.
6,803,545	B2	10/2004	Blake et al.	2008/0149118	A1	6/2008	Oglesby et al.
6,803,550	B2	10/2004	Sharpe et al.	2008/0245377	A1	10/2008	Marshall et al.
				2008/0257367	A1	10/2008	Paterno et al.
				2008/0276947	A1	11/2008	Martzel
				2008/0302374	A1	12/2008	Wengert et al.
				2009/0056389	A1	3/2009	Pinkowski et al.

(56)

References Cited

U.S. PATENT DOCUMENTS

2009/0065010 A1 3/2009 Shands
 2009/0071831 A1 3/2009 Chen et al.
 2009/0095311 A1* 4/2009 Han H02J 7/0042
 131/194
 2009/0095312 A1 4/2009 Herbrich et al.
 2009/0126745 A1 5/2009 Hon
 2009/0188490 A1 7/2009 Han
 2009/0230117 A1 9/2009 Fernando et al.
 2009/0238547 A1 9/2009 Borgmeier
 2009/0260641 A1 10/2009 Monsees et al.
 2009/0260642 A1 10/2009 Monsees et al.
 2009/0272379 A1 11/2009 Thorens et al.
 2009/0283103 A1 11/2009 Nielsen et al.
 2009/0293892 A1 12/2009 Williams et al.
 2009/0320863 A1 12/2009 Fernando et al.
 2009/0324206 A1 12/2009 Young et al.
 2010/0006113 A1 1/2010 Urtsev et al.
 2010/0024834 A1 2/2010 Oglesby et al.
 2010/0043809 A1 2/2010 Magnon
 2010/0059070 A1 3/2010 Potter et al.
 2010/0059073 A1 3/2010 Hoffmann et al.
 2010/0065075 A1 3/2010 Banerjee et al.
 2010/0083959 A1 4/2010 Siller
 2010/0163063 A1 7/2010 Fernando et al.
 2010/0200006 A1 8/2010 Robinson et al.
 2010/0229881 A1 9/2010 Hearn
 2010/0242974 A1 9/2010 Pan
 2010/0242976 A1 9/2010 Katayama et al.
 2010/0258139 A1 10/2010 Onishi et al.
 2010/0300467 A1 12/2010 Kuistilla et al.
 2010/0307518 A1 12/2010 Wang
 2010/0313901 A1 12/2010 Fernando et al.
 2011/0005535 A1 1/2011 Xiu
 2011/0011396 A1 1/2011 Fang
 2011/0036363 A1 2/2011 Urtsev et al.
 2011/0036365 A1 2/2011 Chong et al.
 2011/0073121 A1 3/2011 Levin et al.
 2011/0088707 A1 4/2011 Hajaligol
 2011/0094523 A1 4/2011 Thorens et al.
 2011/0120480 A1 5/2011 Brenneise
 2011/0126847 A1 6/2011 Zuber et al.
 2011/0126848 A1 6/2011 Zuber et al.
 2011/0155153 A1 6/2011 Thorens et al.
 2011/0155718 A1 6/2011 Greim et al.
 2011/0162663 A1 7/2011 Bryman
 2011/0168194 A1 7/2011 Hon
 2011/0180082 A1 7/2011 Baneijee et al.
 2011/0218622 A1 9/2011 Shaolian et al.
 2011/0232654 A1 9/2011 Mass
 2011/0265806 A1 11/2011 Alarcon et al.
 2011/0303231 A1 12/2011 Li et al.
 2011/0309157 A1 12/2011 Yang et al.
 2012/0042885 A1 2/2012 Stone et al.
 2012/0060853 A1 3/2012 Robinson et al.
 2012/0090630 A1 4/2012 Hon
 2012/0111347 A1 5/2012 Hon
 2012/0132643 A1 5/2012 Choi et al.
 2012/0145169 A1* 6/2012 Wu A24F 47/008
 131/273
 2012/0227752 A1 9/2012 Alelov
 2012/0231464 A1 9/2012 Yu et al.
 2012/0260927 A1 10/2012 Liu
 2012/0279512 A1 11/2012 Hon
 2012/0318882 A1 12/2012 Abehasera
 2013/0037041 A1 2/2013 Worm et al.
 2013/0056013 A1 3/2013 Terry et al.
 2013/0081625 A1 4/2013 Rustad et al.
 2013/0081642 A1 4/2013 Safari
 2013/0094841 A1 4/2013 Garvey et al.
 2013/0168363 A1 7/2013 Arakawa
 2013/0192619 A1 8/2013 Tucker et al.
 2013/0192621 A1 8/2013 Li et al.
 2013/0199528 A1 8/2013 Goodman et al.
 2013/0213419 A1* 8/2013 Tucker H05B 3/141
 131/328

2013/0255702 A1 10/2013 Griffith, Jr. et al.
 2013/0306084 A1 11/2013 Flick
 2013/0313246 A1 11/2013 Long et al.
 2013/0319439 A1 12/2013 Gorelick et al.
 2013/0340750 A1 12/2013 Thorens et al.
 2013/0340775 A1 12/2013 Juster et al.
 2014/0000638 A1 1/2014 Sebastian et al.
 2014/0060554 A1 3/2014 Collett et al.
 2014/0060555 A1 3/2014 Chang et al.
 2014/0096781 A1 4/2014 Sears et al.
 2014/0096782 A1 4/2014 Ampolini et al.
 2014/0157583 A1 6/2014 Ward et al.
 2014/0190496 A1 7/2014 Wensley et al.
 2014/0209105 A1 7/2014 Sears et al.
 2014/0253144 A1 9/2014 Novak, III et al.
 2014/0261408 A1 9/2014 DePiano et al.
 2014/0261486 A1 9/2014 Potter et al.
 2014/0261487 A1* 9/2014 Chapman A24F 40/44
 131/328
 2014/0261495 A1 9/2014 Novak, III et al.
 2014/0270727 A1 9/2014 Ampolini et al.
 2014/0270729 A1 9/2014 DePiano et al.
 2015/0007838 A1 1/2015 Fernando et al.
 2015/0144145 A1* 5/2015 Chang A24F 47/008
 131/328
 2015/0157055 A1* 6/2015 Lord H05B 3/16
 131/329
 2015/0201674 A1* 7/2015 Dooly A24F 40/42
 53/432

FOREIGN PATENT DOCUMENTS

CA 2 752 255 8/2010
 CN 1541577 11/2004
 CN 2719043 8/2005
 CN 101084034 12/2007
 CN 200997909 1/2008
 CN 101116542 2/2008
 CN 101176805 5/2008
 CN 101606758 12/2009
 CN 201379072 1/2010
 CN 102356929 2/2012
 CN 202407080 9/2012
 CN 202738815 2/2013
 CN 102894485 4/2015
 DE 10 2006 004 484 8/2007
 DE 102006041042 3/2008
 DE 20 2009 010 400 11/2009
 EP 0 295 122 12/1988
 EP 0 430 566 6/1991
 EP 0 845 220 6/1998
 EP 1 618 803 1/2006
 EP 2 316 286 5/2011
 EP 1 996 037 B1 4/2012
 EP 2 468 116 6/2012
 EP 1 993 388 B1 8/2012
 GB 1444461 7/1976
 GB 2469850 11/2010
 JP 2012-517831 8/2012
 RU 94815 U1 6/2010
 WO WO 1986/02528 5/1986
 WO WO 1997/48293 12/1997
 WO WO 02/37990 5/2002
 WO WO 2003/034847 A1 5/2003
 WO WO 2004/043175 5/2004
 WO WO 2005/099494 10/2005
 WO WO 2007/078273 7/2007
 WO WO 2007/131449 11/2007
 WO WO 2009/105919 9/2009
 WO WO 2009/155734 12/2009
 WO WO 2010/003480 1/2010
 WO WO 2010/045670 4/2010
 WO WO 2010/073122 7/2010
 WO WO 2010/091593 8/2010
 WO WO 2010/118644 10/2010
 WO WO 2010/140937 12/2010
 WO WO 2011/010334 1/2011
 WO WO 2011/081558 7/2011

(56)

References Cited

FOREIGN PATENT DOCUMENTS

WO	WO 2012/072762	6/2012
WO	WO 2012/100523	8/2012
WO	WO 2013/089551	6/2013

OTHER PUBLICATIONS

Chinese Office Action dated Feb. 16, 2017 in Chinese application
No. 201480024265.3.

* cited by examiner

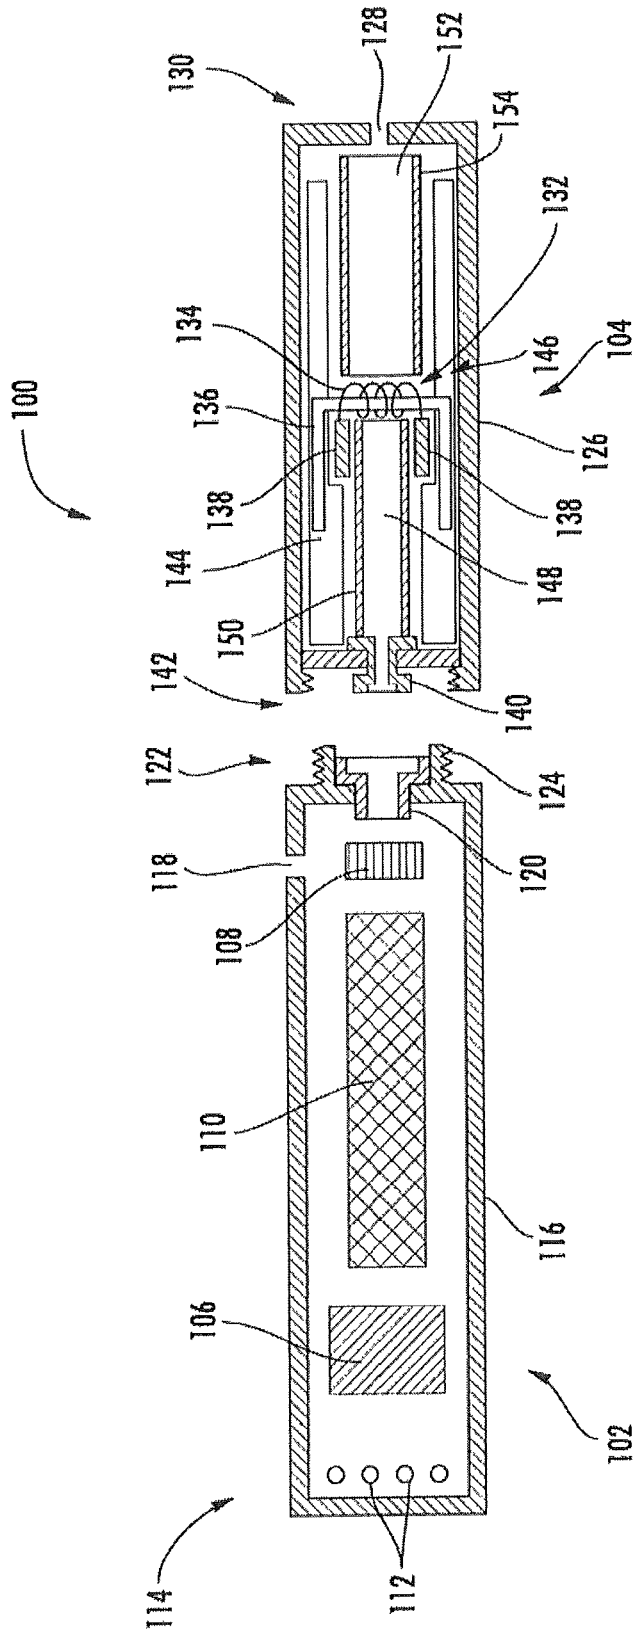


FIG. 1

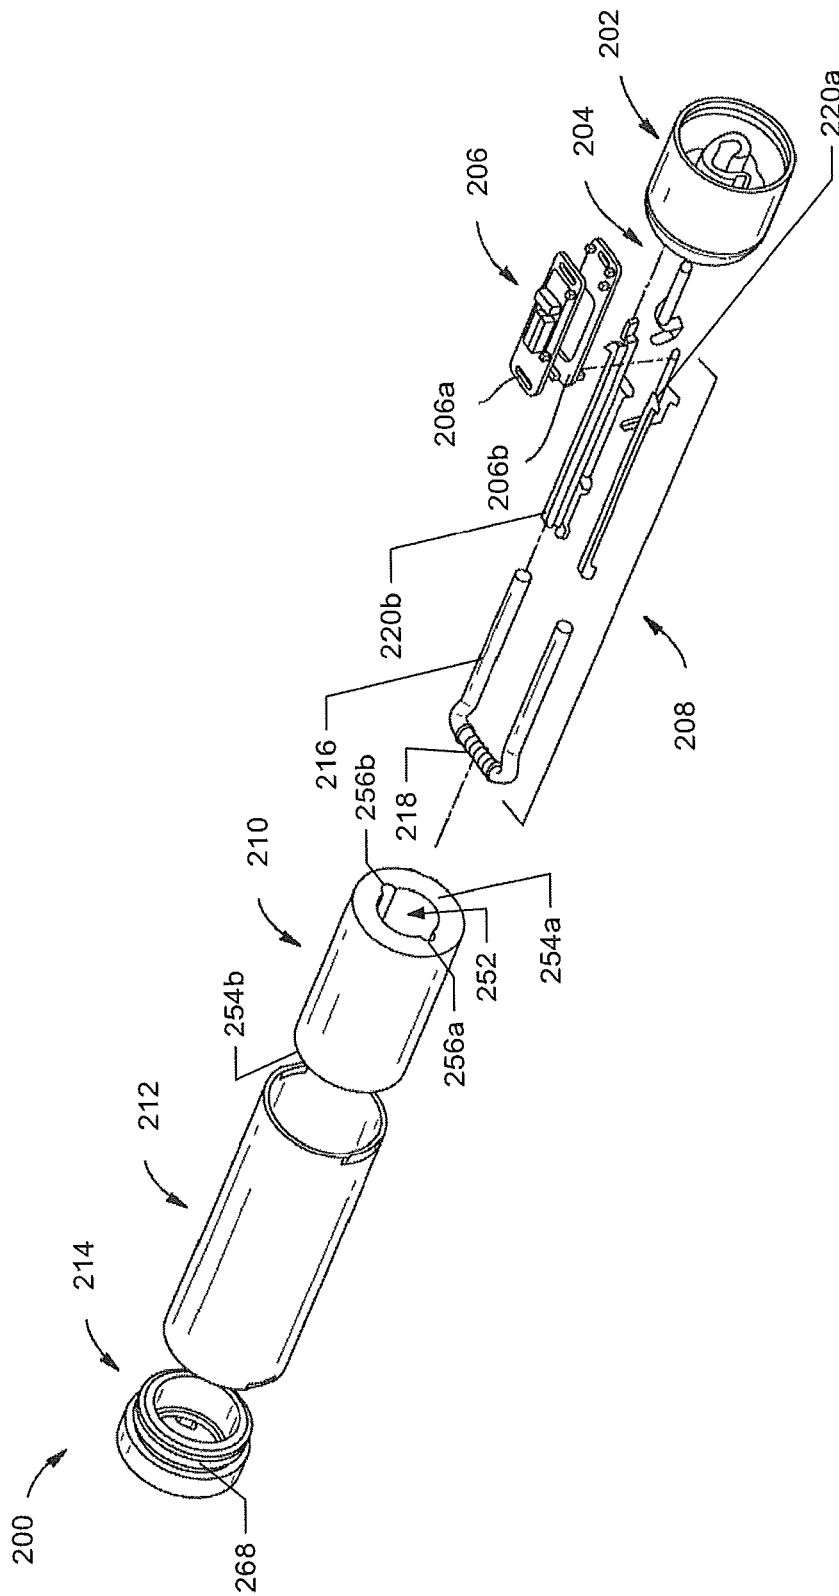


FIG. 2

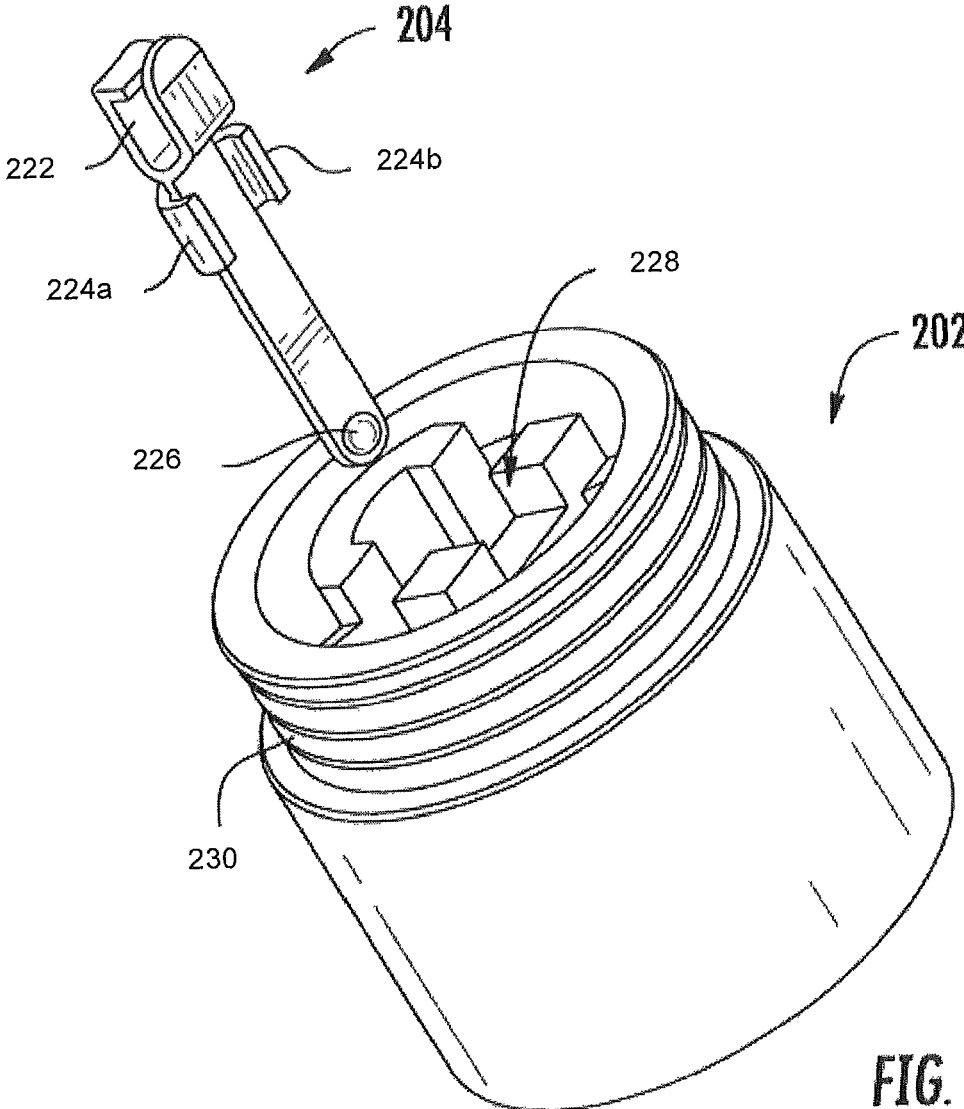
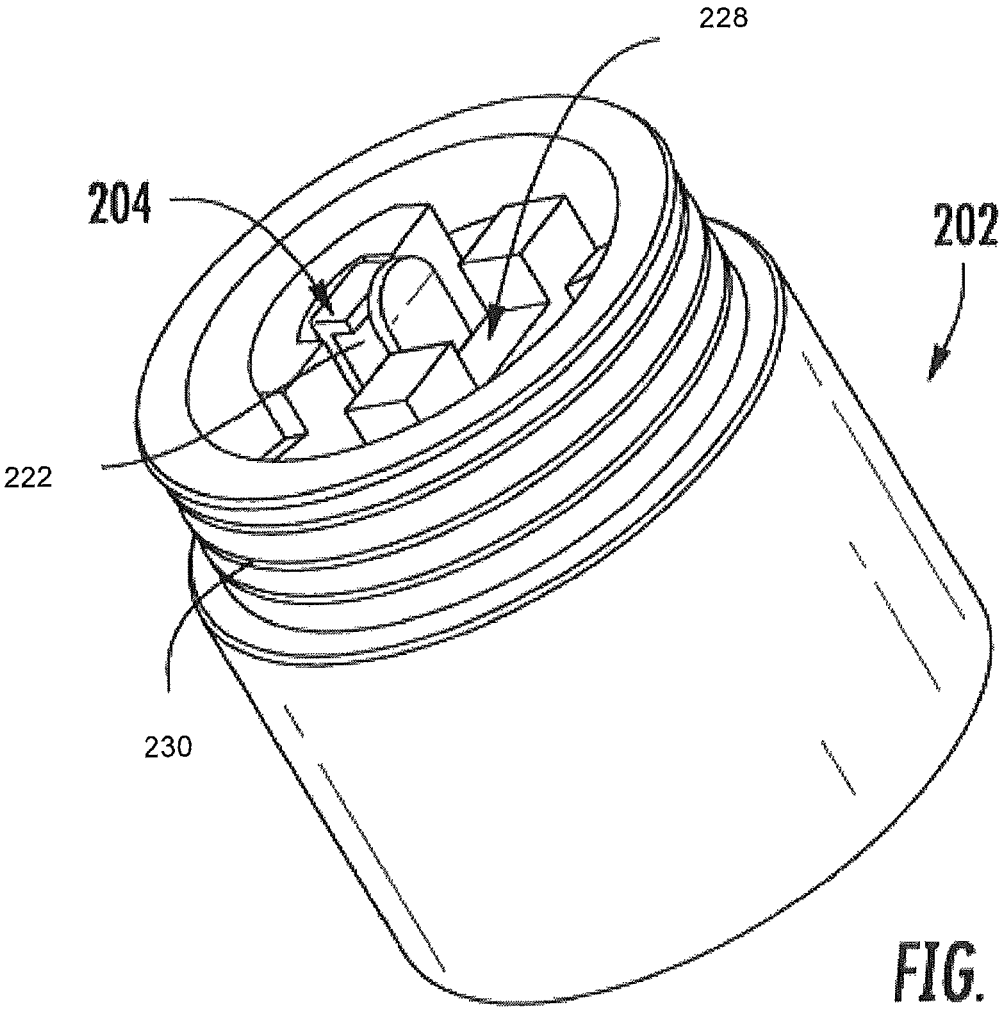


FIG. 3



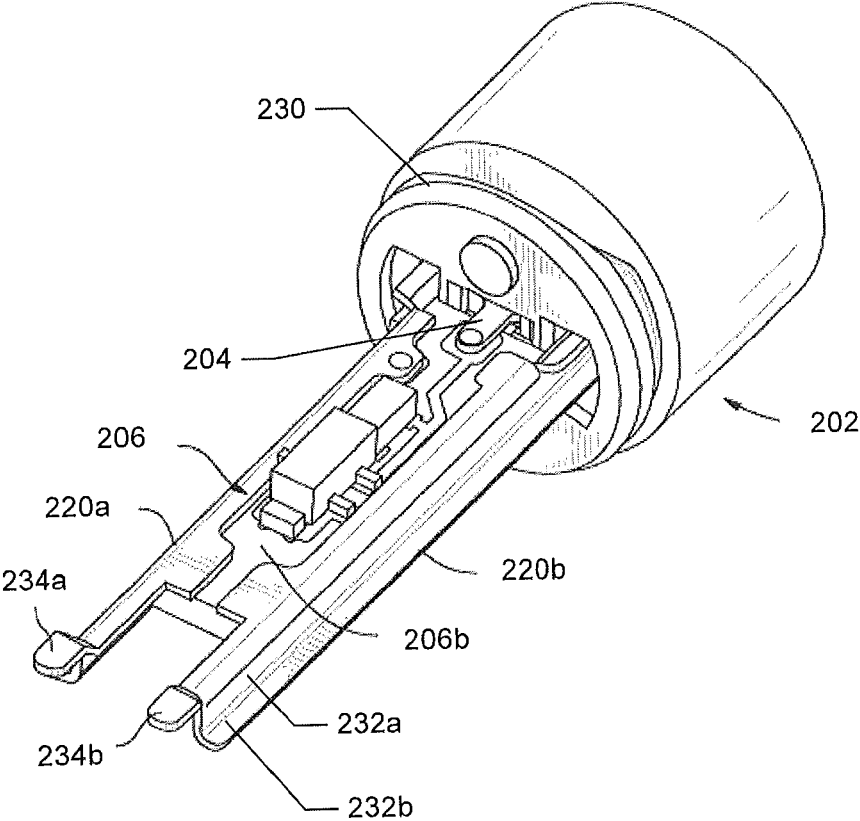


FIG. 5

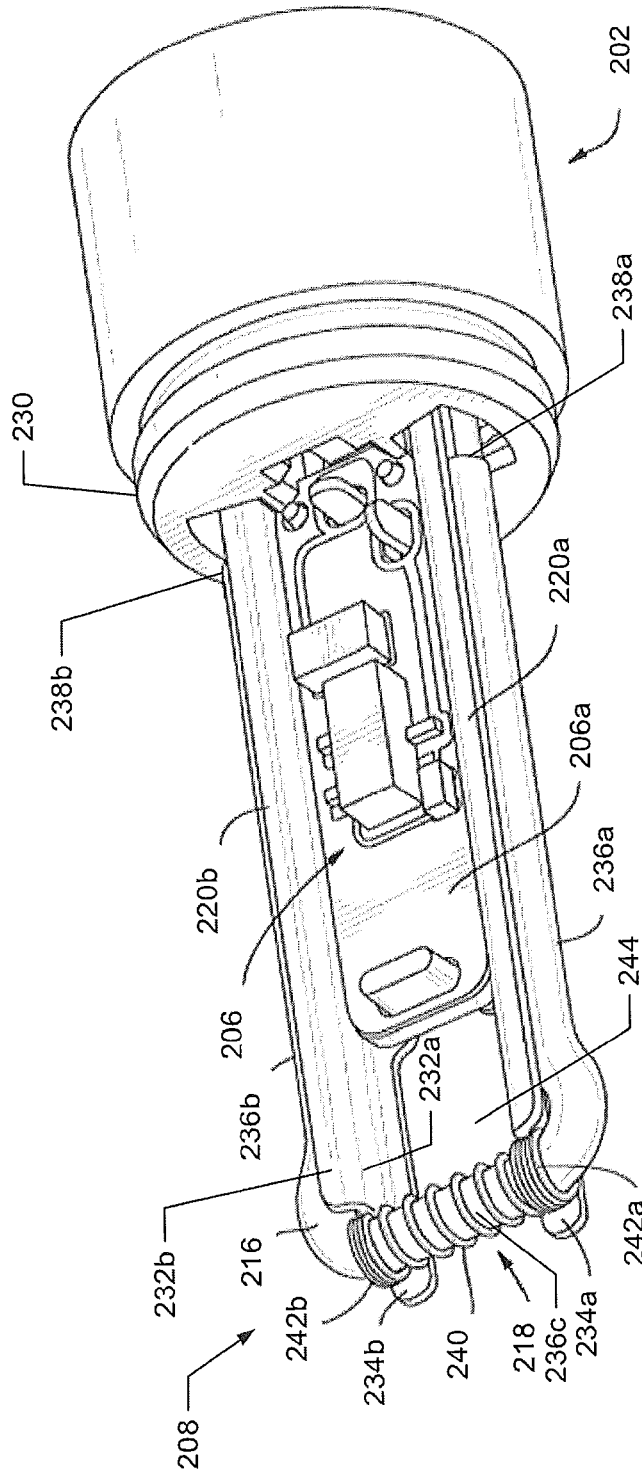


FIG. 6

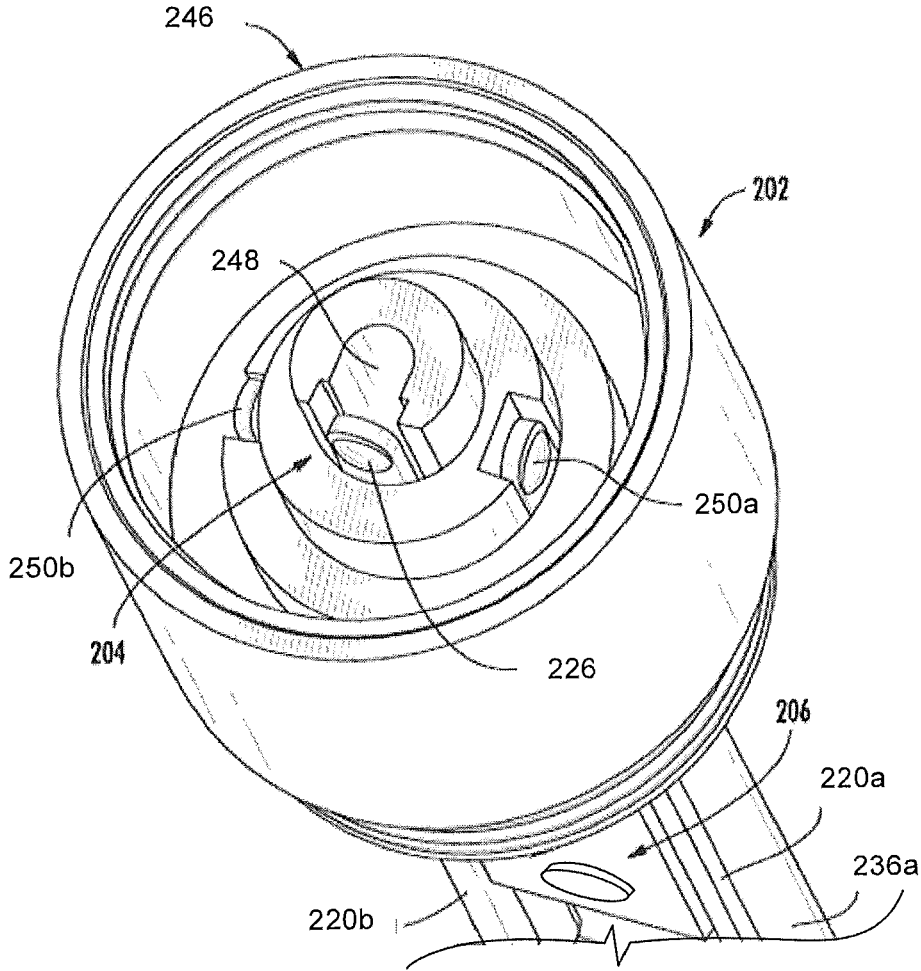


FIG. 7

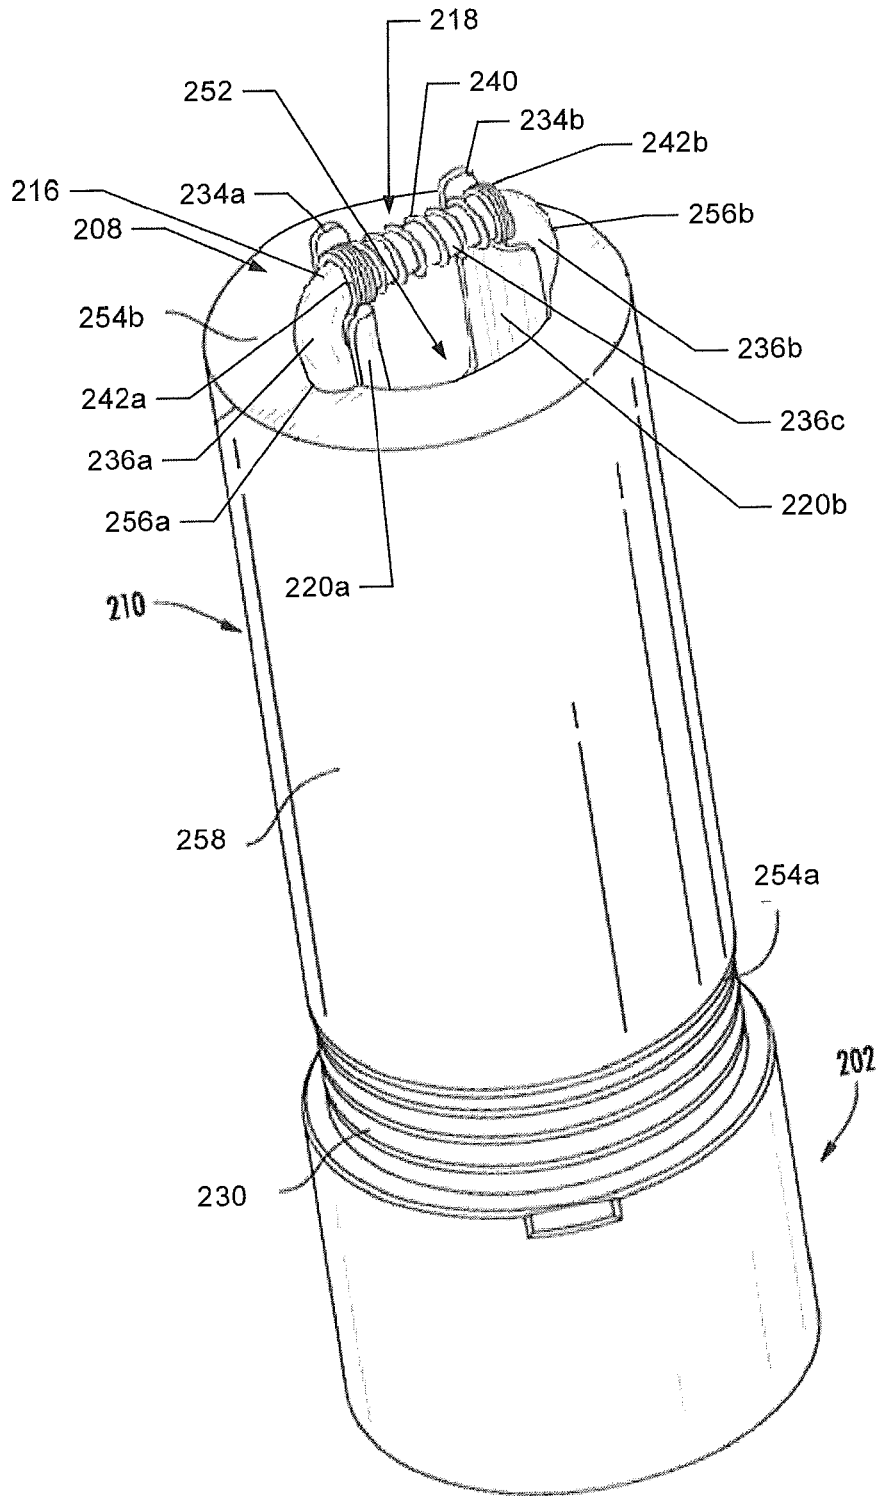


FIG. 8

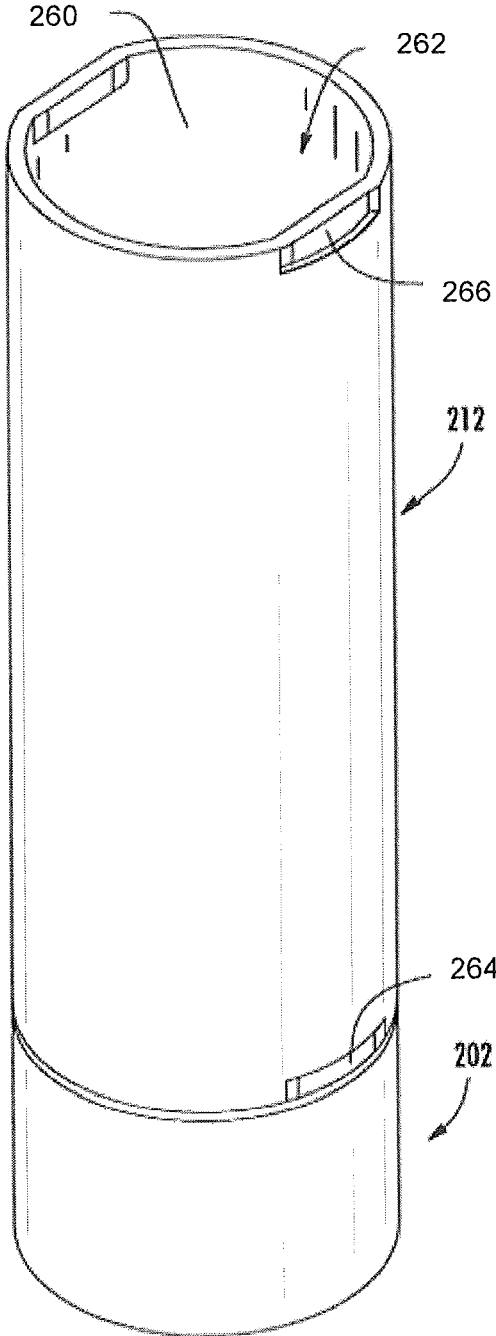


FIG. 9

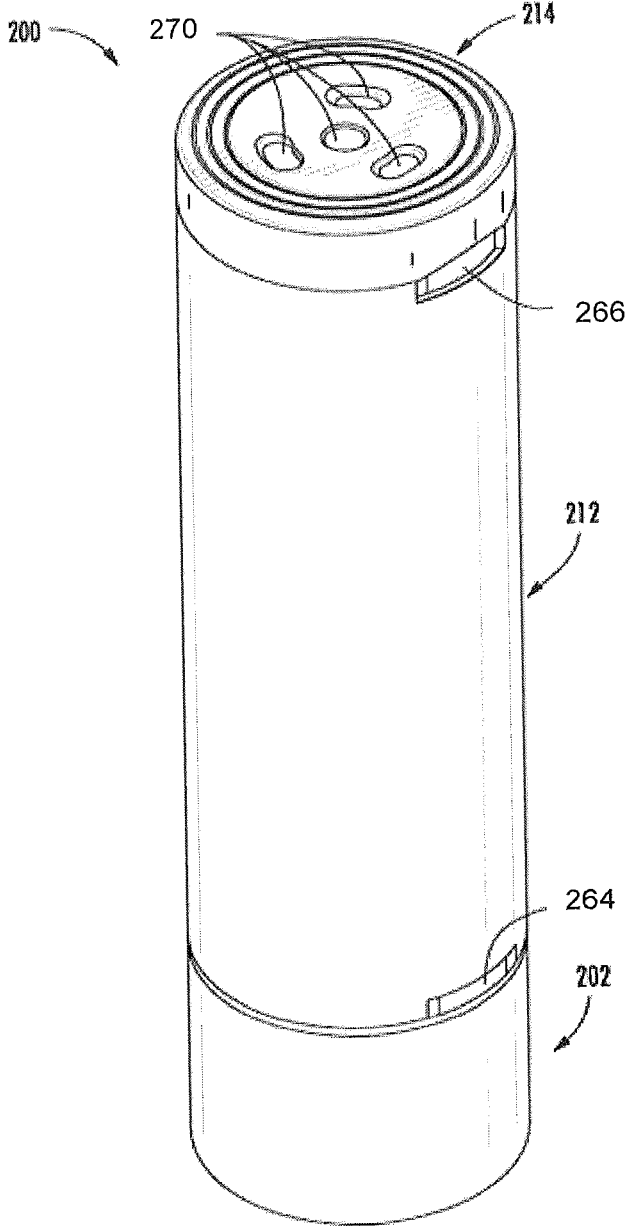


FIG. 10

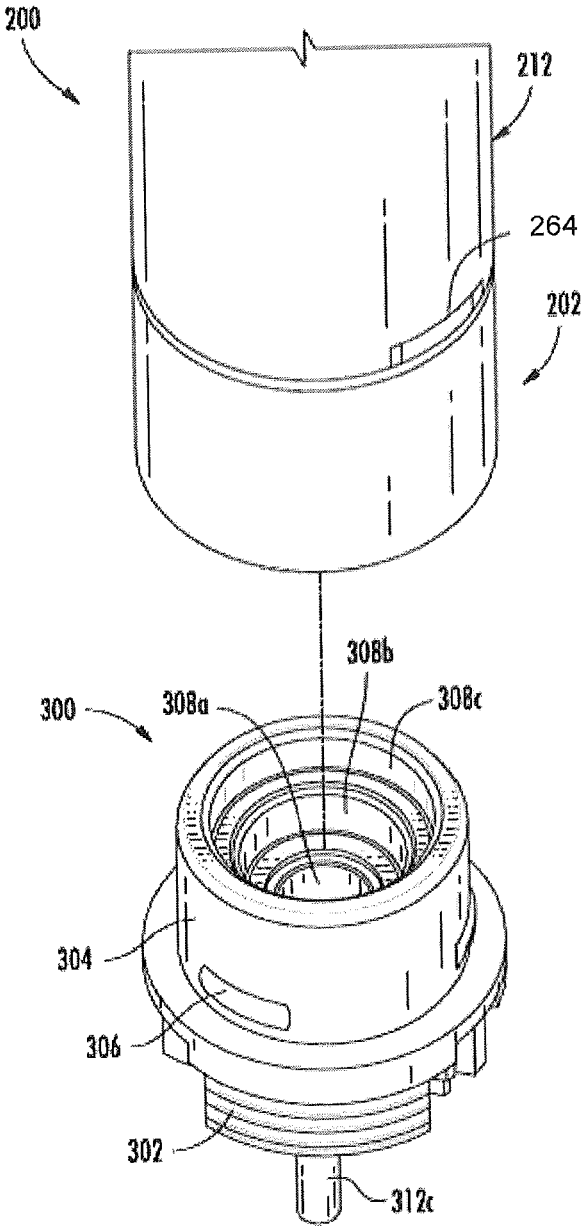


FIG. 11

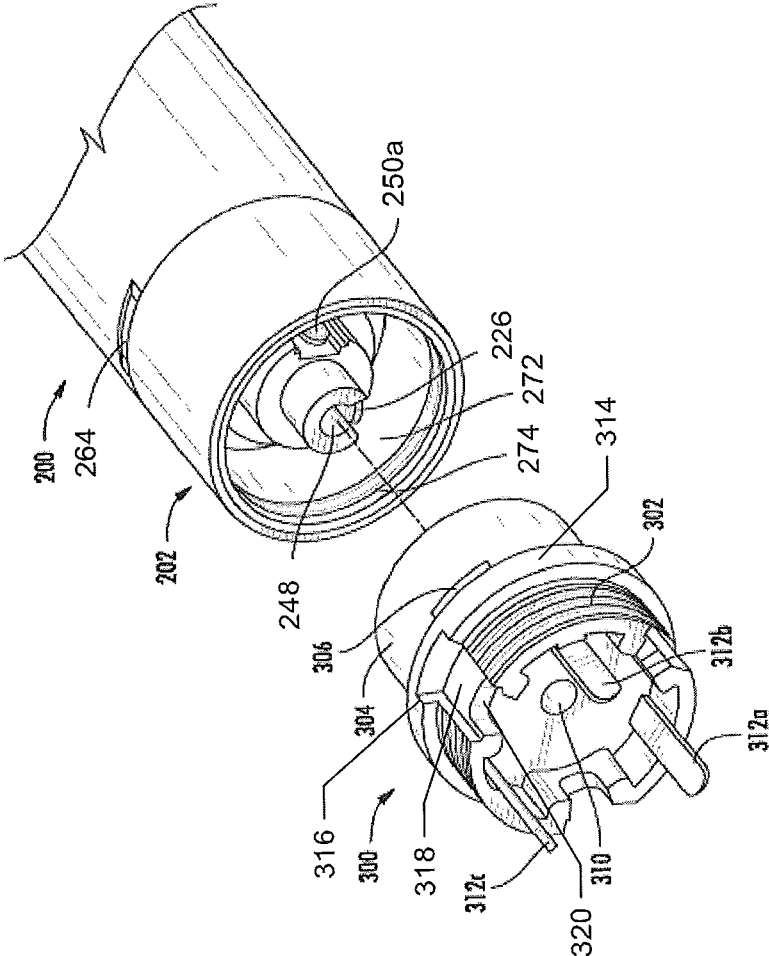


FIG. 12

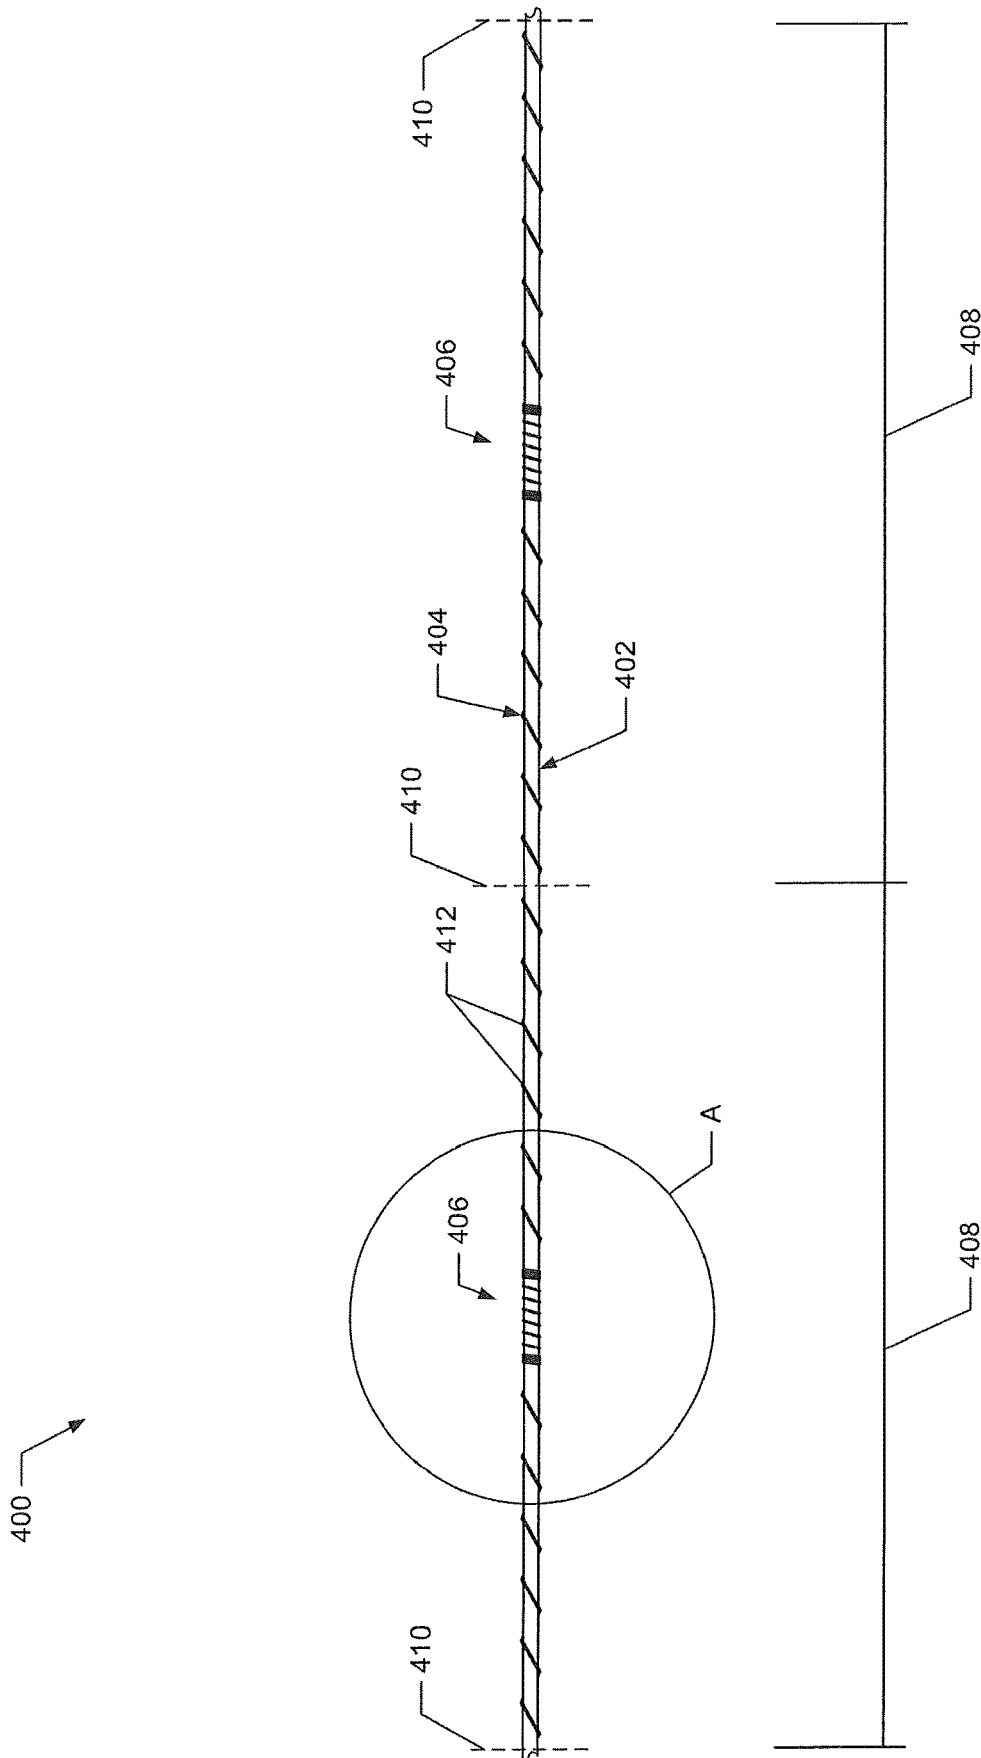


FIG. 13

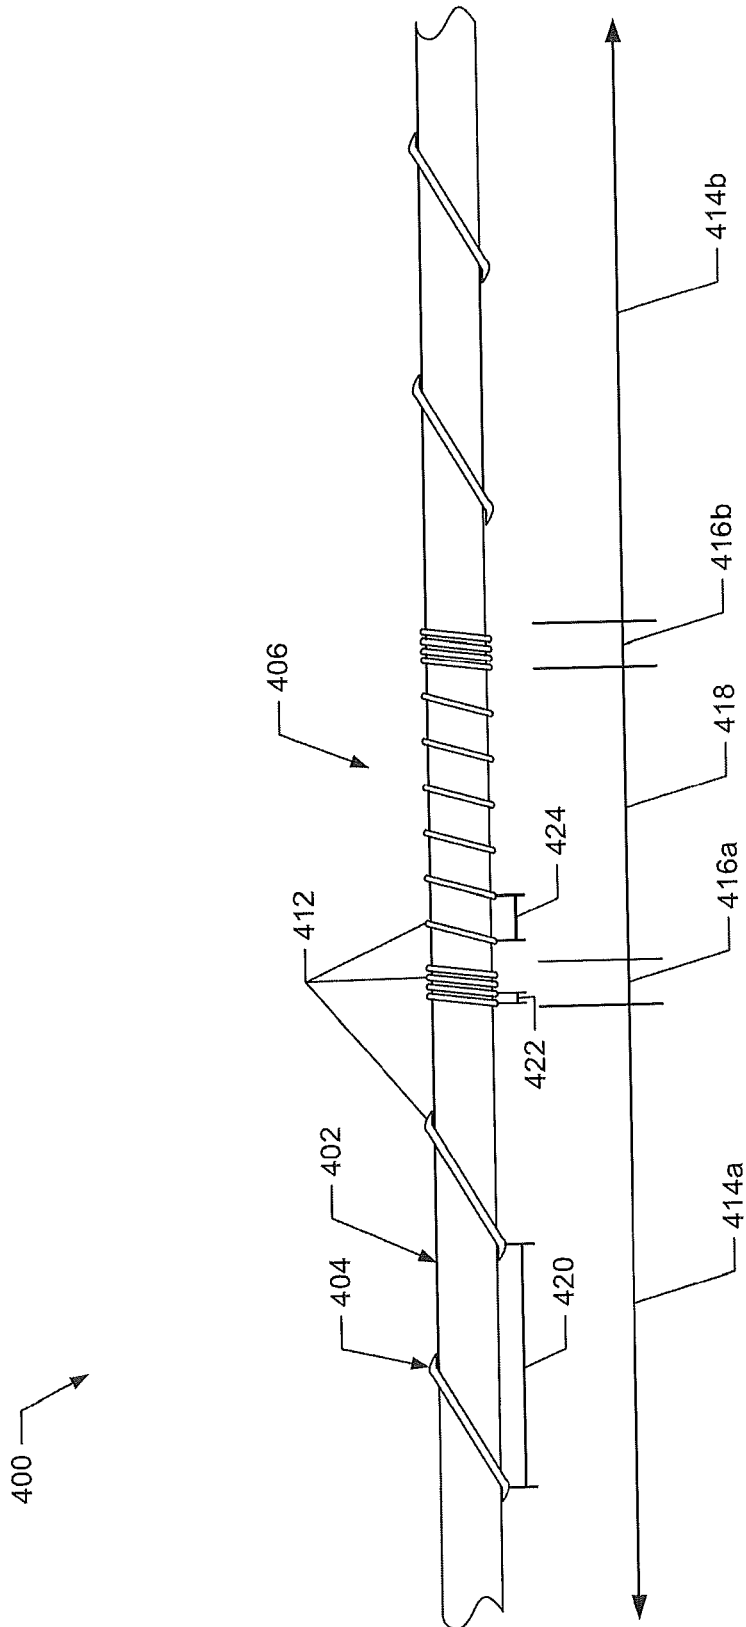


FIG. 14

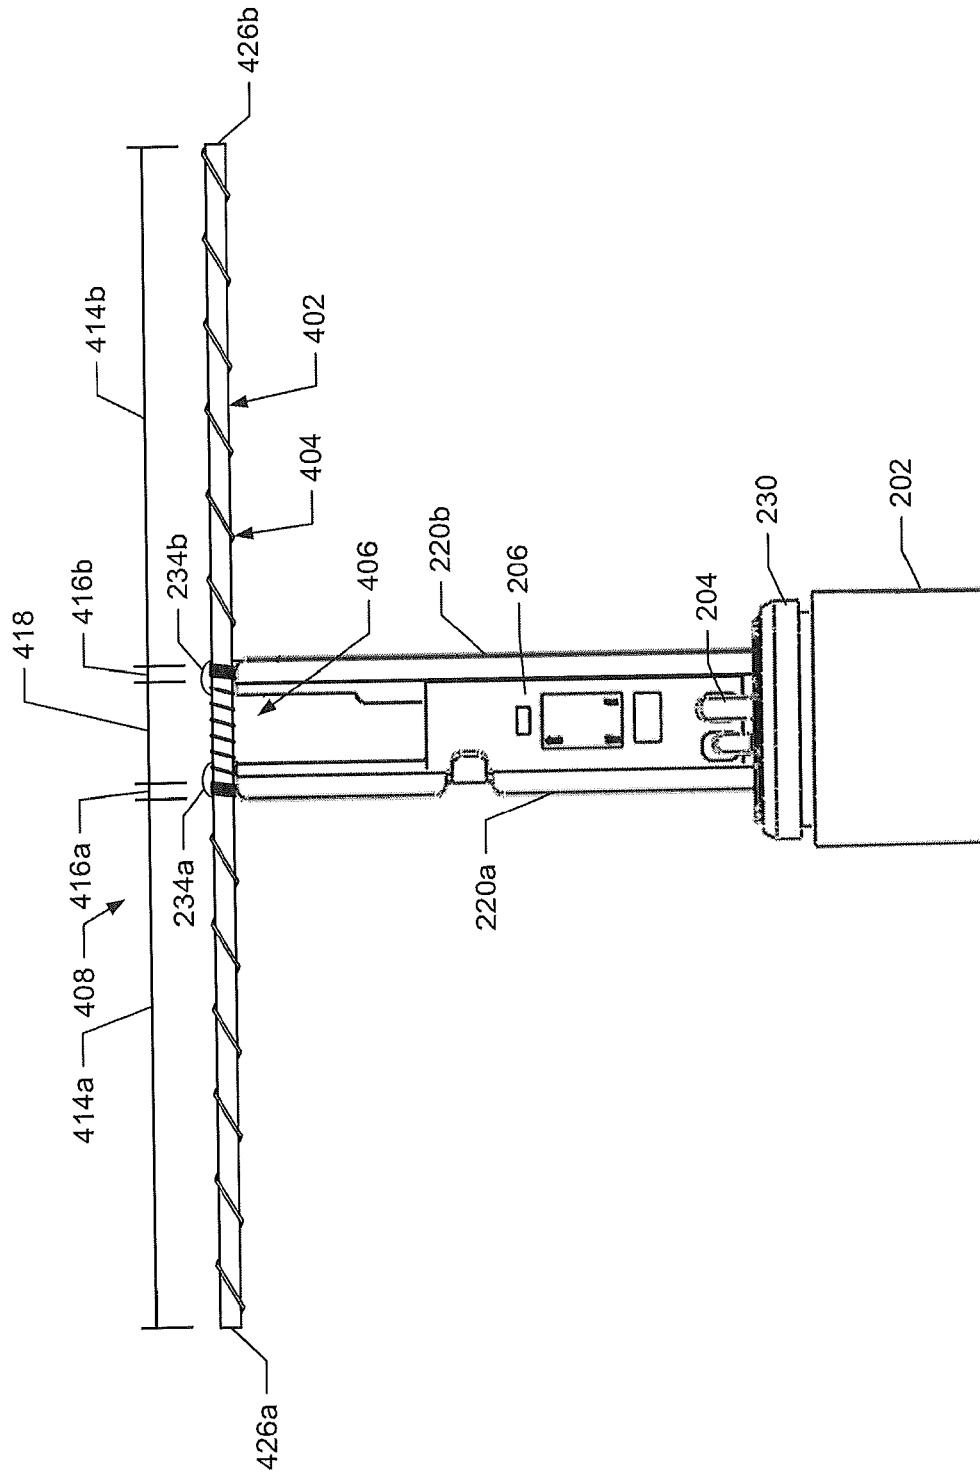


FIG. 15

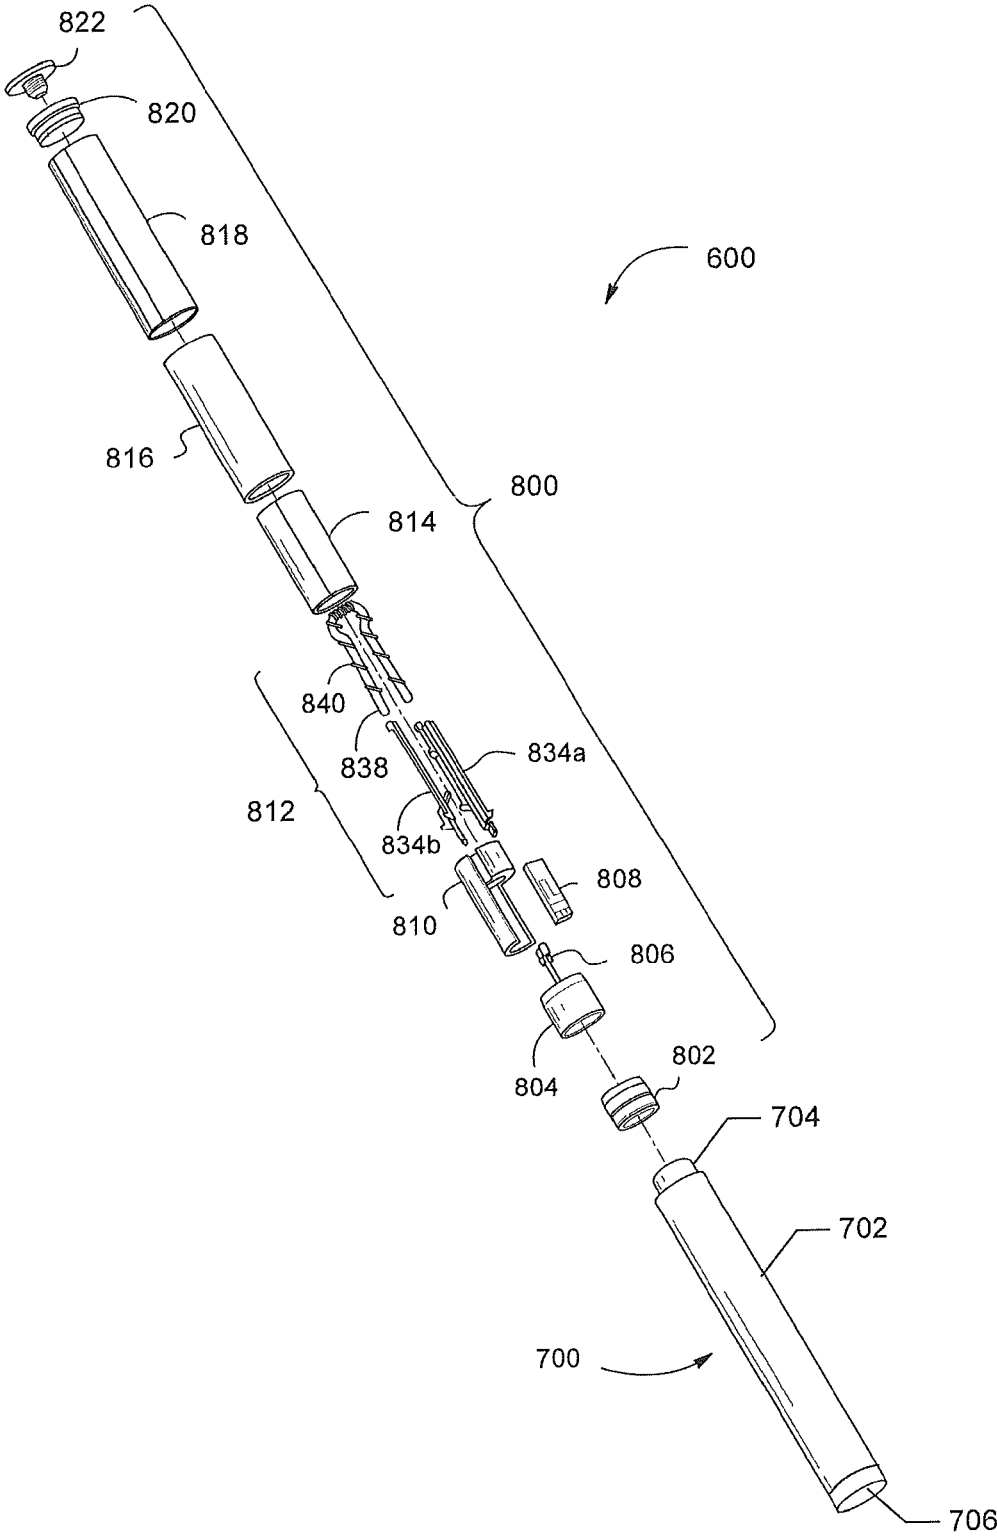


FIG. 17

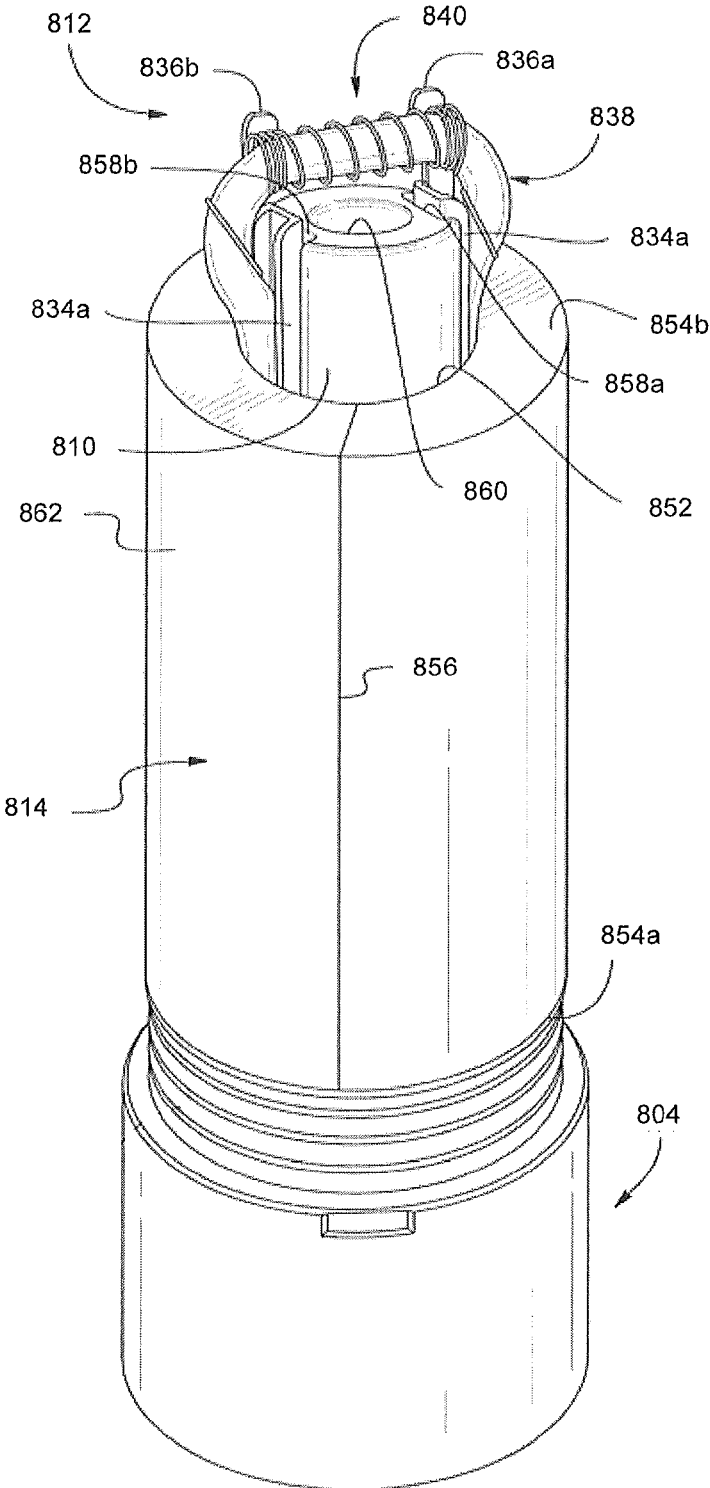


FIG. 18

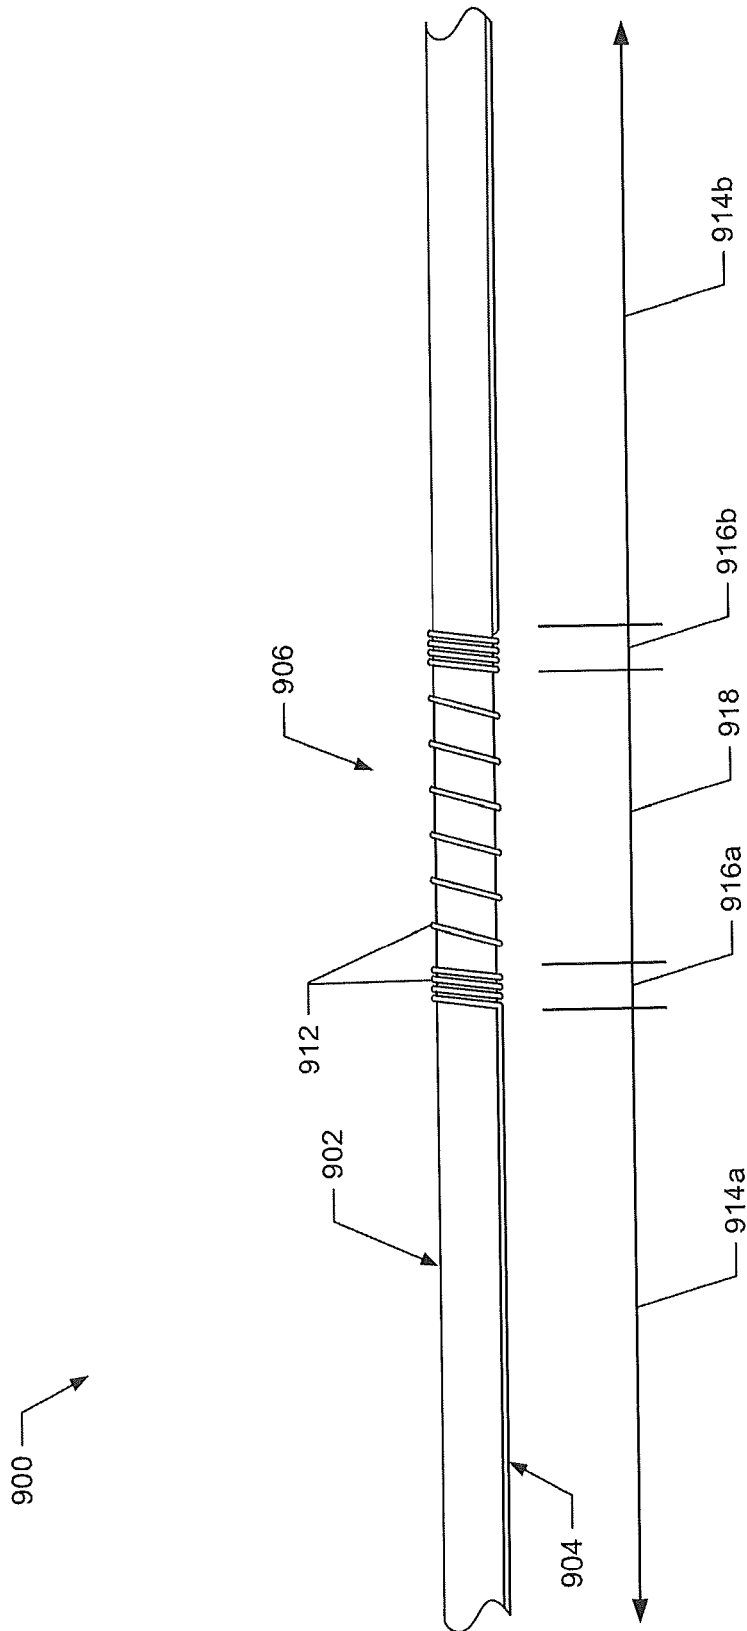


FIG. 19

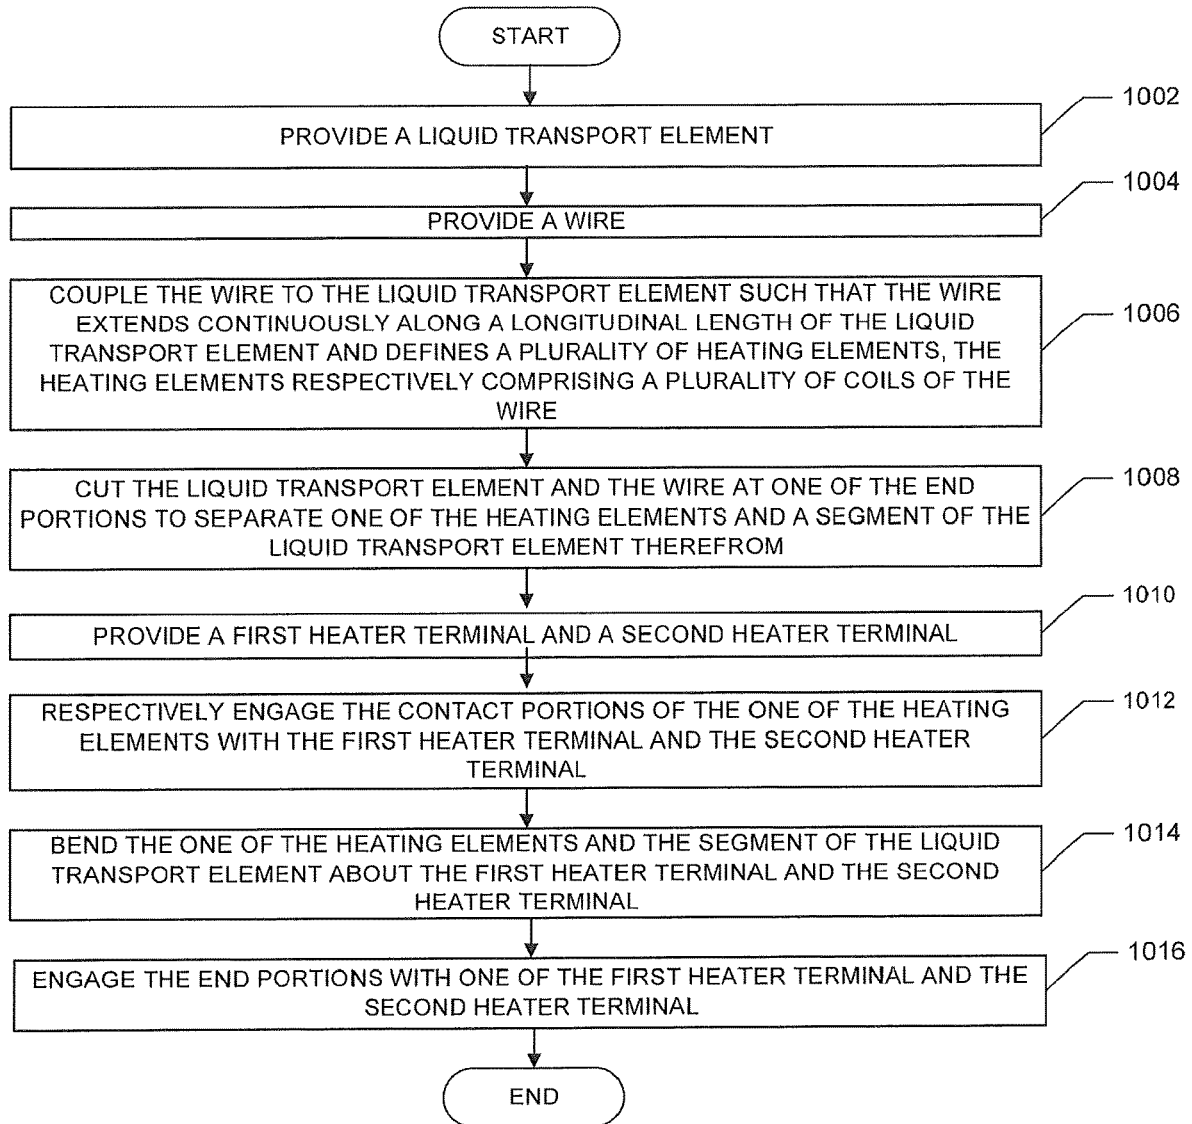


FIG. 20

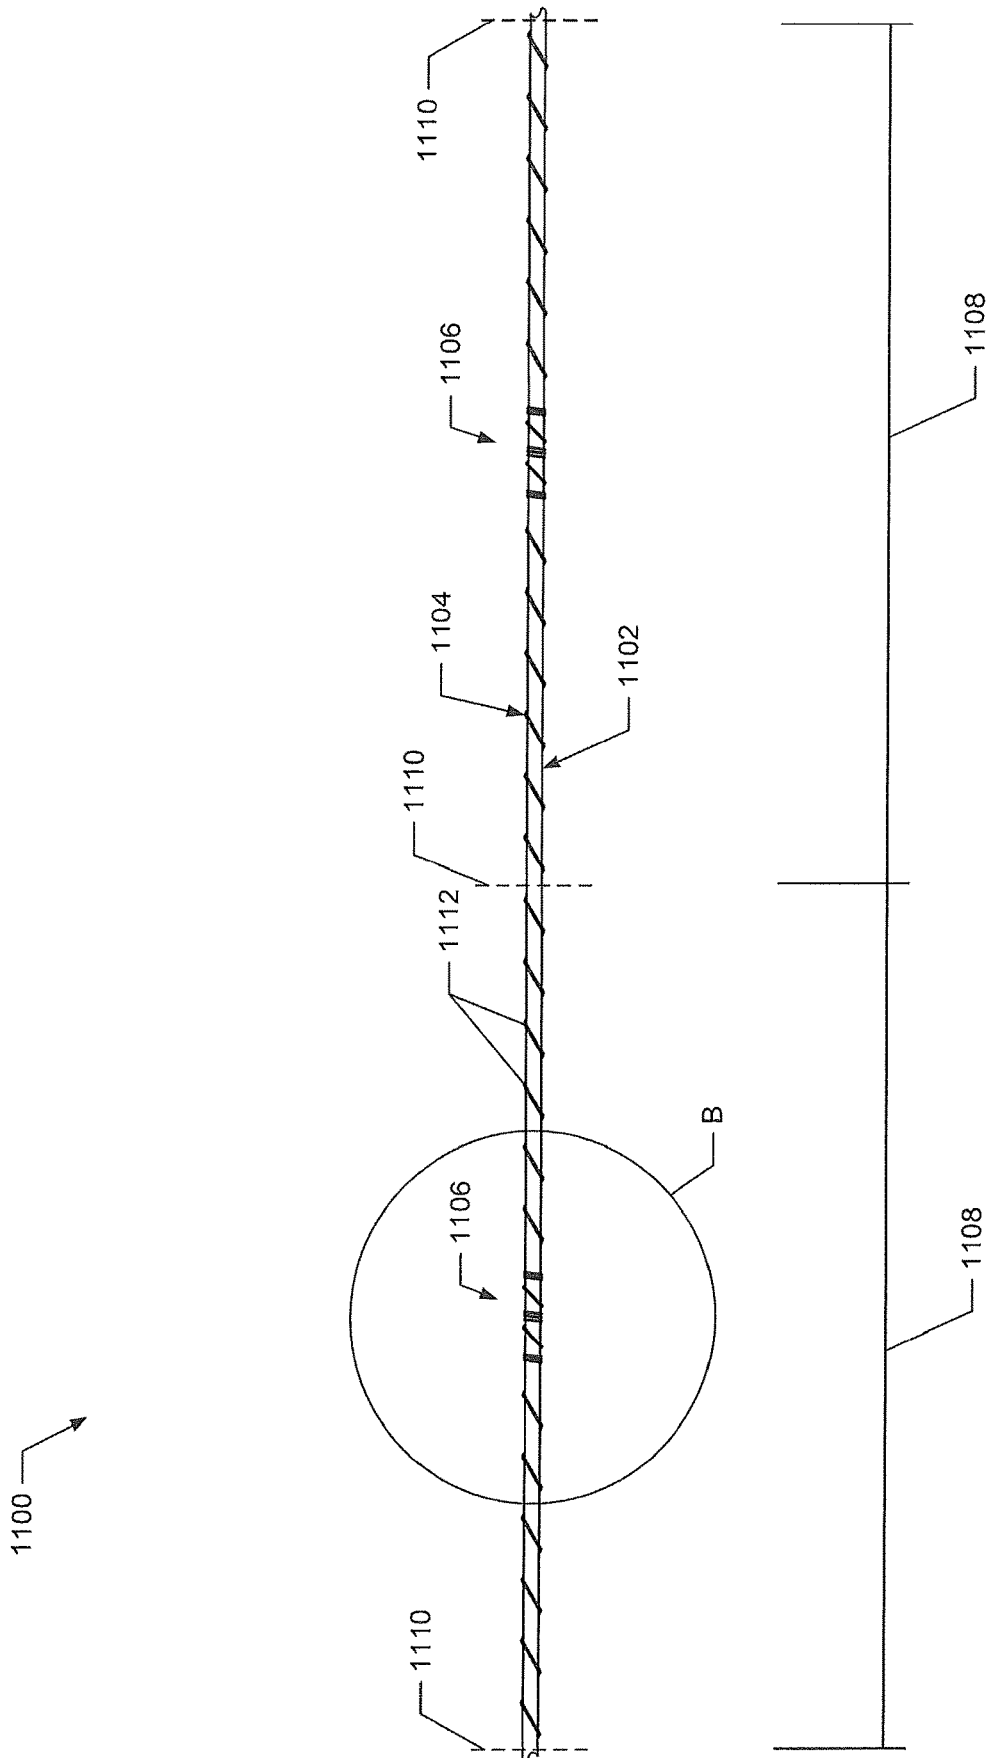


FIG. 21

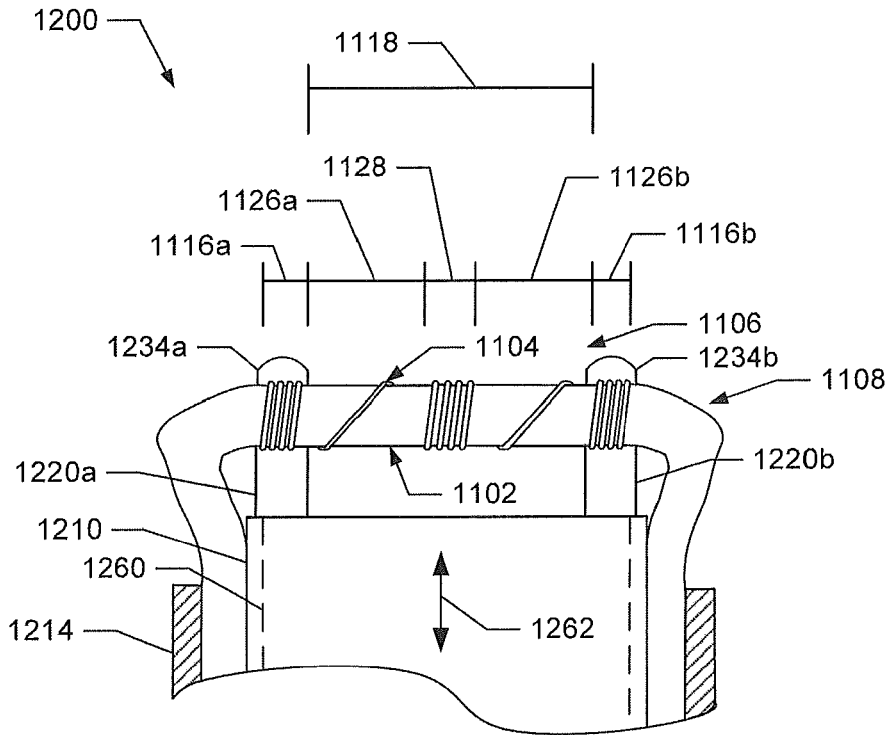


FIG. 23

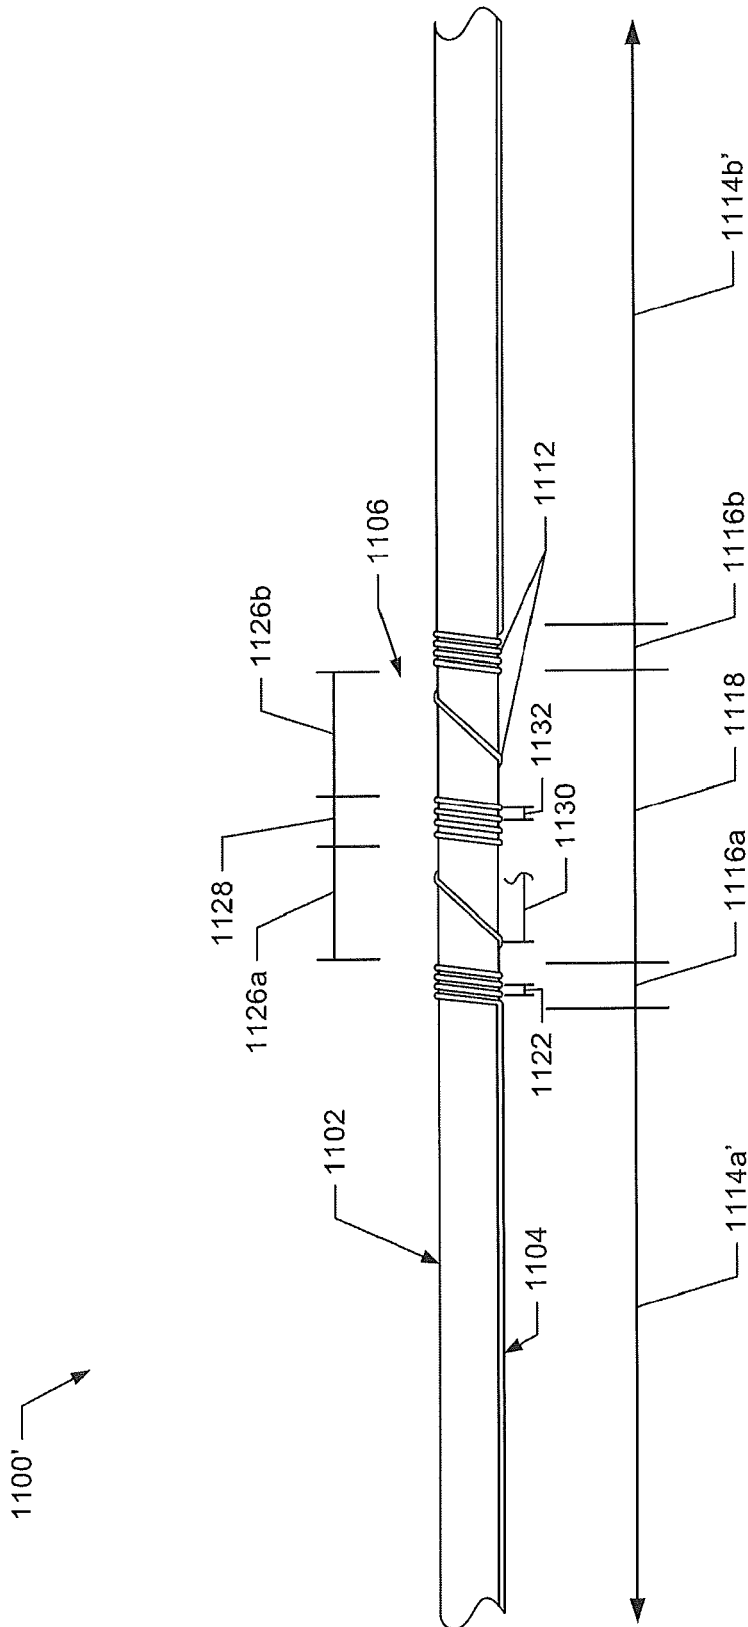


FIG. 24

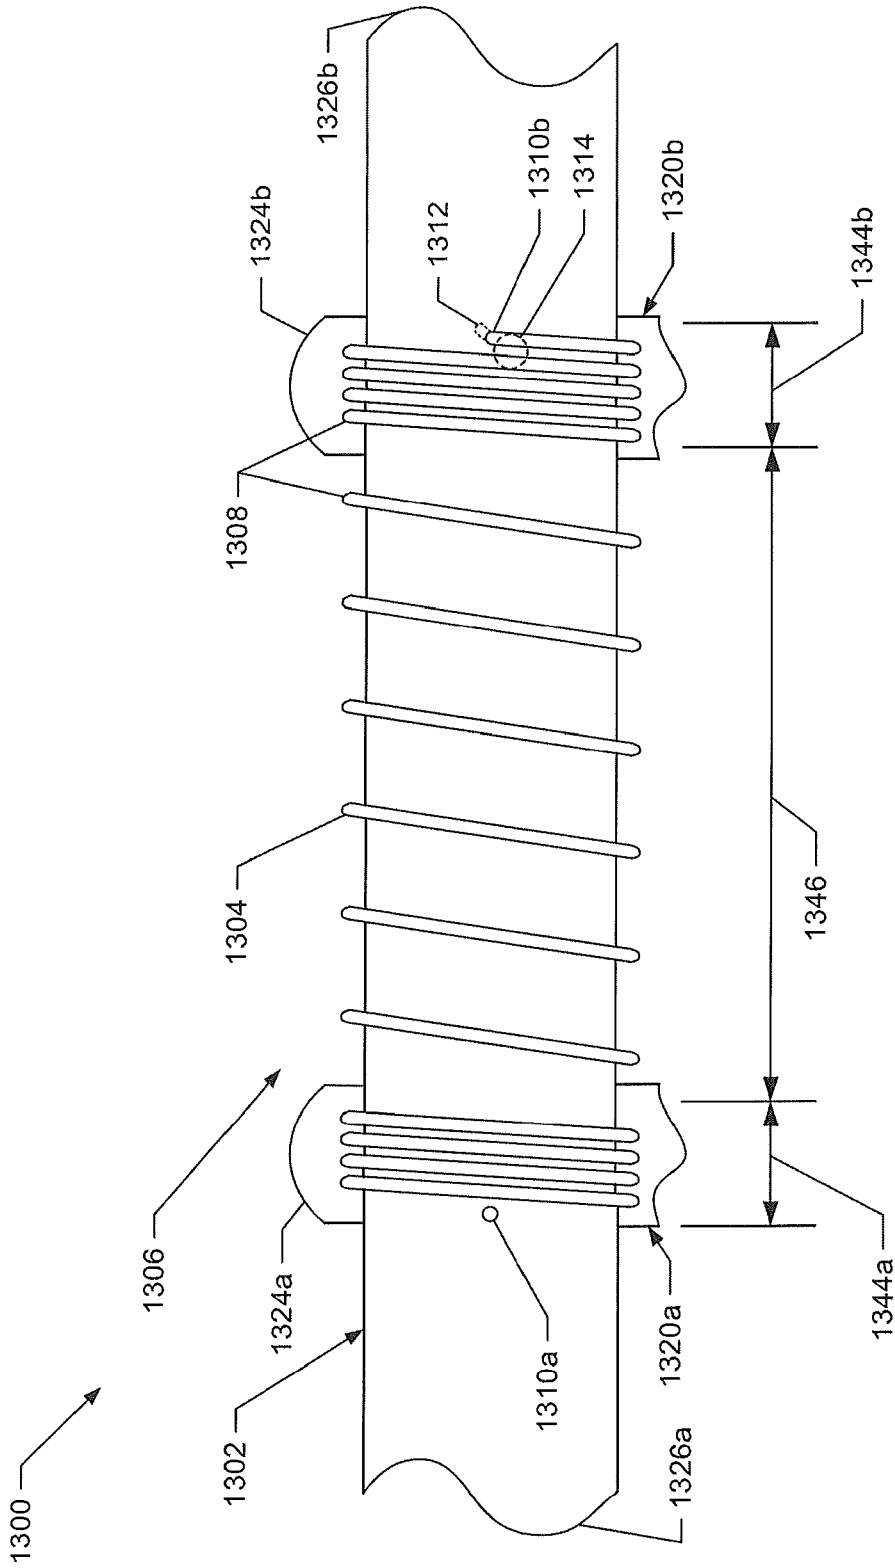


FIG. 25

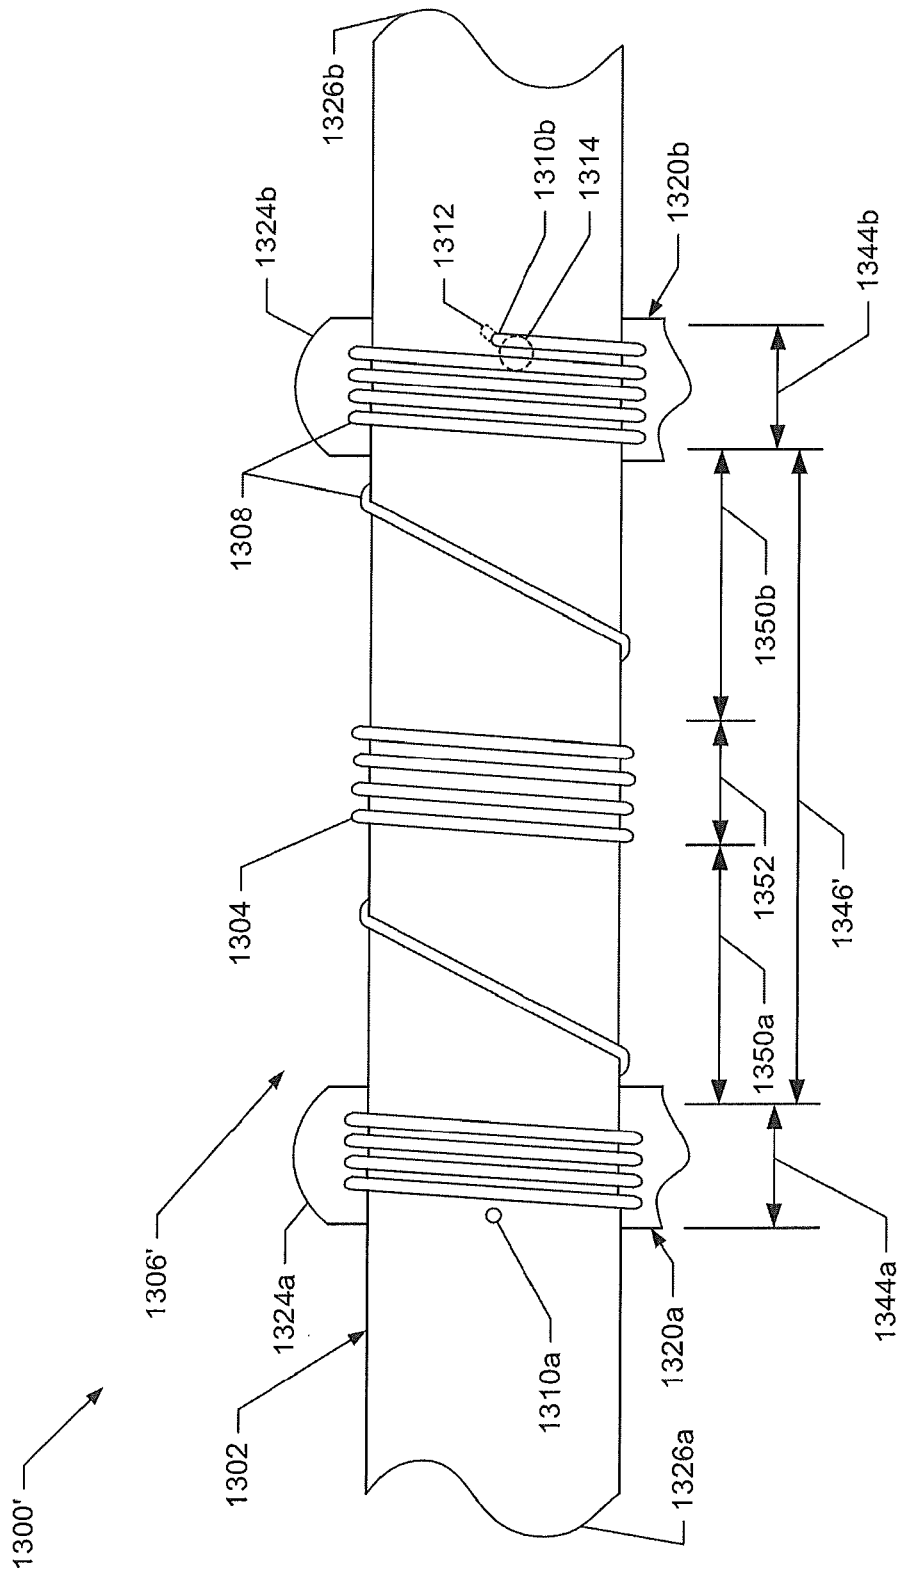


FIG. 26

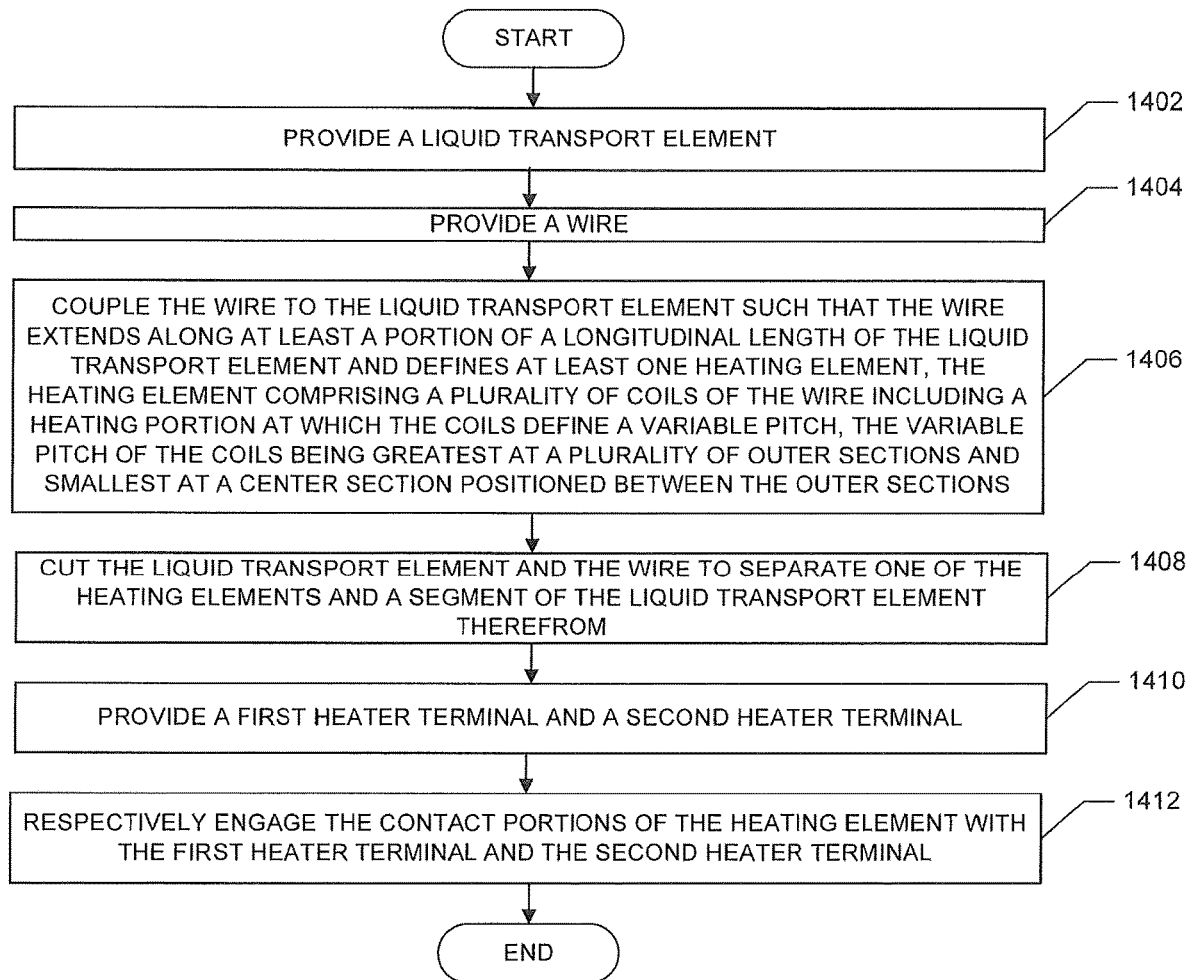


FIG. 27

1

**ATOMIZER FOR AN AEROSOL DELIVERY
DEVICE AND RELATED INPUT, AEROSOL
PRODUCTION ASSEMBLY, CARTRIDGE,
AND METHOD**

CROSS-REFERENCE TO RELATED
APPLICATIONS

This application is a divisional of U.S. patent application Ser. No. 14/194,233, filed Feb. 28, 2014, which is hereby incorporated by reference in its entirety in this application.

FIELD OF THE DISCLOSURE

The present disclosure relates to atomizers for aerosol delivery devices such as electronic cigarettes, and more particularly to atomizers comprising a wire and a liquid transport element. The atomizers may be configured to heat a material, which may be made or derived from tobacco or otherwise incorporate tobacco, to form an inhalable substance for human consumption.

BACKGROUND

Many smoking devices have been proposed through the years as improvements upon, or alternatives to, smoking products that require combusting tobacco for use. Many of those devices purportedly have been designed to provide the sensations associated with cigarette, cigar, or pipe smoking, but without delivering considerable quantities of incomplete combustion and pyrolysis products that result from the burning of tobacco. To this end, there have been proposed numerous smoking products, flavor generators, and medicinal inhalers that utilize electrical energy to vaporize or heat a volatile material, or attempt to provide the sensations of cigarette, cigar, or pipe smoking without burning tobacco to a significant degree. See, for example, the various alternative smoking articles, aerosol delivery devices and heat generating sources set forth in the background art described in U.S. Pat. No. 7,726,320 to Robinson et al., U.S. Pat. Pub. No. 2013/0255702 to Griffith et al., U.S. Pat. Pub. No. 2014/0000638 to Sebastian et al., U.S. patent application Ser. No. 13/602,871, filed Sep. 4, 2012, to Collett et al., and U.S. patent application Ser. No. 13/647,000, filed Oct. 8, 2012, to Sears et al., which are incorporated herein by reference in their entireties.

Certain tobacco products that have employed electrical energy to produce heat for smoke or aerosol formation, and in particular, certain products that have been referred to as electronic cigarette products, have been commercially available throughout the world. Representative products that resemble many of the attributes of traditional types of cigarettes, cigars or pipes have been marketed as ACCORD® by Philip Morris Incorporated; ALPHA™, JOYE 510™ and M4™ by InnoVapor LLC; CIRRUS™ and FLING™ by White Cloud Cigarettes; BLU™ by Lorillard Technologies, Inc.; COHITA™, COLIBRI™, ELITE CLASSIC™, MAGNUM™, PHANTOM™ and SENSE™ by Epuffer® International Inc.; DUOPRO™, STORM™ and VAPORKING® by Electronic Cigarettes, Inc.; EGAR™ by Egar Australia; eGo-C™ and eGo-T™ by Joyetech; ELUSION™ by Elusion UK Ltd; EONSMOKE® by Eonsmoke LLC; FIN™ by FIN Branding Group, LLC; SMOKE® by Green Smoke Inc. USA; GREENARETTE™ by Greenarette LLC; HALLIGAN™, HENDU™, JET™, MAXXQ™, PINK™ and PITBULL™ by Smoke Stik®; HEATBAR™ by Philip Morris International, Inc.; HYDRO

2

IMPERIAL™ and LXETM from Crown7; LOGIC™ and THE CUBAN™ by LOGIC Technology; LUCI® by Luciano Smokes Inc.; METRO® by Nicotek, LLC; NJOY® and ONEJOY™ by Sottera, Inc.; NO. 7™ by SS Choice LLC; PREMIUM ELECTRONIC CIGARETTE™ by PremiumEstore LLC; RAPP E-MYSTICK™ by Ruyan America, Inc.; RED DRAGON™ by Red Dragon Products, LLC; RUYAN® by Ruyan Group (Holdings) Ltd.; SF® by Smoker Friendly International, LLC; GREEN SMART SMOKER® by The Smart Smoking Electronic Cigarette Company Ltd.; SMOKE ASSIST® by Coastline Products LLC; SMOKING EVERYWHERE® by Smoking Everywhere, Inc.; V2CIGS™ by VMR Products LLC; VAPOR NINE™ by VaporNine LLC; VAPOR4LIFE® by Vapor 4 Life, Inc.; VEPPOTM by E-CigaretteDirect, LLC; VUSE® by R. J. Reynolds Vapor Company; Mystic Menthol product by Mystic Ecigs; and the Vype product by CN Creative Ltd. Yet other electrically powered aerosol delivery devices, and in particular those devices that have been characterized as so-called electronic cigarettes, have been marketed under the tradenames COOLER VISIONS™; DIRECT E-CIG™; DRAGONFLY™; EMIST™; EVERSMOKE™; GAMUCCI®; HYBRID FLAME™; KNIGHT STICKS™; ROYAL BLUES™; SMOKETIP®; SOUTH BEACH SMOKE™.

Additional manufacturers, designers, and/or assignees of components and related technologies that may be employed in aerosol delivery device include Shenzhen Jieshibo Technology of Shenzhen, China; Shenzhen First Union Technology of Shenzhen City, China; Safe Cig of Los Angeles, Calif.; Janty Asia Company of the Philippines; Joyetech Changzhou Electronics of Shenzhen, China; SIS Resources; B2B International Holdings of Dover, Del.; Evolv LLC of Ohio; Montrade of Bologna, Italy; Shenzhen Bauway Technology of Shenzhen, China; Global Vapor Trademarks Inc. of Pompano Beach, Fla.; Vapor Corp. of Fort Lauderdale, Fla.; Nemtra GMBH of Raschau-Markersbach, Germany; Perrigo L. Co. of Allegan, Mich.; Needs Co., Ltd.; Smoke-free Innotech of Las Vegas, Nev.; McNeil AB of Helsingborg, Sweden; Chong Corp; Alexza Pharmaceuticals of Mountain View, Calif.; BLEC, LLC of Charlotte, N.C.; Gaitrend Sarl of Rohrbach-les-Bitche, France; FeelLife Bioscience International of Shenzhen, China; Vishay Electronic GMBH of Selb, Germany; Shenzhen Smaco Technology Ltd. of Shenzhen, China; Vapor Systems International of Boca Raton, Fla.; Exonoid Medical Devices of Israel; Shenzhen Nowotech Electronic of Shenzhen, China; Minilogic Device Corporation of Hong Kong, China; Shenzhen Kontle Electronics of Shenzhen, China, and Fuma International, LLC of Medina, Ohio, and 21st Century Smoke of Beloit, Wis.

It would be desirable to provide an aerosol delivery device that employs heat produced by electrical energy to provide the sensations of cigarette, cigar, or pipe smoking, that does so without combusting tobacco to any significant degree, that does so without the need of a combustion heat source, and that does so without necessarily delivering considerable quantities of incomplete combustion and pyrolysis products. Further, advances with respect to manufacturing electronic smoking articles and producing aerosol would be desirable.

BRIEF SUMMARY OF THE DISCLOSURE

The present disclosure relates to aerosol delivery devices such as electronic cigarettes configured to produce aerosol. In one aspect an input for production of a plurality of atomizers is provided. The input may comprise a liquid

3

transport element and a wire continuously extending along a longitudinal length of the liquid transport element and defining a plurality of heating elements. The heating elements may respectively comprise a plurality of coils of the wire.

In some embodiments the wire may be continuously wound about the liquid transport element. The wire may further define a plurality of end portions defining a first pitch. Each of the heating elements may comprise a plurality of contact portions positioned between the end portions and defining a second pitch and a heating portion positioned between the contact portions and defining a third pitch. The second pitch may be less than the first pitch, and the third pitch may be less than the first pitch and greater than the second pitch. Further, the second pitch may be substantially equal to a diameter of the wire.

In an additional aspect, an atomizer for an aerosol delivery device is provided. The atomizer may comprise a liquid transport element extending between a first liquid transport element end and a second liquid transport element end and a wire continuously extending along the liquid transport element from the first liquid transport element end to the second liquid transport element end and defining a heating element comprising a plurality of coils of the wire.

In some embodiments the wire may be continuously wound about the liquid transport element. The wire may further define a plurality of end portions defining a first pitch, and the heating element may comprise a plurality of contact portions positioned between the end portions and defining a second pitch and a heating portion positioned between the contact portions and defining a third pitch. The second pitch may be less than the first pitch, and the third pitch may be less than the first pitch and greater than the second pitch. The second pitch may be substantially equal to a diameter of the wire. The atomizer may further comprise a first heater terminal and a second heater terminal, and the contact portions of the heating element may respectively contact one of the first heater terminal and the second heater terminal. The end portions may respectively contact one of the first heater terminal and the second heater terminal.

In an additional aspect a cartridge for an aerosol delivery device is provided. The cartridge may comprise a base defining a connector end configured to engage a control body. Further, the cartridge may include a reservoir substrate configured to hold an aerosol precursor composition. The reservoir substrate may define a cavity extending there-through from a first reservoir end to a second reservoir end, and the first reservoir end may be positioned proximate the base. The cartridge may additionally include an atomizer extending through the cavity of the reservoir substrate. The atomizer may comprise a liquid transport element extending between a first liquid transport element end and a second liquid transport element end and a wire continuously extending along the liquid transport element from the first liquid transport element end to the second liquid transport element end and defining a heating element comprising a plurality of coils of the wire.

In some embodiments the wire may be continuously wound about the liquid transport element. The wire may further define a plurality of end portions defining a first pitch, and the heating element may comprise a plurality of contact portions positioned between the end portions and defining a second pitch and a heating portion positioned between the contact portions and defining a third pitch. The second pitch may be less than the first pitch, and the third

4

pitch may be less than the first pitch and greater than the second pitch. The second pitch may be substantially equal to a diameter of the wire.

In some embodiments the atomizer may further comprise a first heater terminal and a second heater terminal. The contact portions of the heating element may respectively contact one of the first heater terminal and the second heater terminal. The end portions may also respectively contact one of the first heater terminal and the second heater terminal. The reservoir substrate may define a plurality of grooves at the cavity extending between the first reservoir end and the second reservoir end and configured to receive the liquid transport element and the end portions.

In an additional aspect, a method of forming atomizers is provided. The method may comprise providing a liquid transport element, providing a wire, and coupling the wire to the liquid transport element such that the wire extends continuously along a longitudinal length of the liquid transport element and defines a plurality of heating elements. The heating elements may respectively comprise a plurality of coils of the wire.

In some embodiments coupling the wire to the liquid transport element may comprise continuously winding the wire about the liquid transport element. Winding the wire about the liquid transport element may comprise winding the wire to define a plurality of end portions defining a first pitch and winding the wire such that each of the heating elements comprises a plurality of contact portions positioned between the end portions and defining a second pitch and a heating portion positioned between the contact portions and defining a third pitch. The second pitch may be less than the first pitch, and the third pitch may be less than the first pitch and greater than the second pitch. In some embodiments the second pitch may be substantially equal to a diameter of the wire.

The method may further comprise cutting the liquid transport element and the wire at one of the end portions to separate one of the heating elements and a segment of the liquid transport element therefrom. Further, the method may include providing a first heater terminal and a second heater terminal and respectively engaging the contact portions of the one of the heating elements with the first heater terminal and the second heater terminal. The method may additionally include bending the one of the heating elements and the segment of the liquid transport element about the first heater terminal and the second heater terminal. The method may also include respectively engaging the end portions with one of the first heater terminal and the second heater terminal.

In an additional aspect an input for production of a plurality of atomizers is provided. The input may include a liquid transport element. Further, the input may include a wire continuously extending along a longitudinal length of the liquid transport element and defining a plurality of heating elements. The heating elements may respectively include a plurality of coils of the wire including a heating portion at which the coils may define a variable pitch.

In some embodiments the variable pitch of the coils at the heating portion may be greatest at a plurality of outer sections and smallest at a center section positioned between the outer sections. The heating elements may further respectively include a plurality of contact portions. The heating portion may be positioned between the contact portions. The wire may further define a plurality of end portion coils defining a first pitch. The contact portions may be positioned between the end portion coils and may define a second pitch that is less than the first pitch.

5

In an additional aspect an atomizer for an aerosol delivery device is provided. The atomizer may include a liquid transport element extending between a first liquid transport element end and a second liquid transport element end. Further, the atomizer may include a wire extending along at least a portion of the liquid transport element and defining a heating element including a plurality of coils of the wire including a heating portion at which the coils define a variable pitch. The variable pitch of the coils may be greatest at a plurality of outer sections and smallest at a center section positioned between the outer sections.

In some embodiments, at least a portion of the heating element may be positioned interior to the liquid transport element. For example, the liquid transport element can completely enclose at least a portion of the heating element.

In some embodiments the wire may continuously extend from the first liquid transport end to the second liquid transport end. In an additional embodiment the wire may extend at least partially through the liquid transport element at one or both of first and second wire ends. The heating element may additionally include a plurality of contact portions. The heating portion may be positioned between the contact portions.

In some embodiments the wire may further define a plurality of end portion coils defining a first pitch. The contact portions may be positioned between the end portion coils and may define a second pitch that is less than the first pitch. The atomizer may additionally include a first heater terminal and a second heater terminal. The contact portions of the heating element may respectively contact one of the first heater terminal and the second heater terminal.

In an additional aspect an aerosol production assembly for an aerosol delivery device is provided. The aerosol production assembly may include a reservoir substrate configured to hold an aerosol precursor composition. The aerosol production assembly may additionally include an atomizer in contact with the reservoir substrate. The atomizer may include a liquid transport element extending between a first liquid transport element end and a second liquid transport element end. A wire may extend along at least a portion of the liquid transport element and may define a heating element including a plurality of coils of the wire including a heating portion at which the coils define a variable pitch. The aerosol production assembly may additionally include a flow director defining an aperture extending therethrough. The aperture may be aligned with a center section of the heating portion of the heating element.

In some embodiments, the wire may continuously extend from the first liquid transport end to the second liquid transport end. In another embodiment the wire may extend at least partially through the liquid transport element at one or both of first and second wire ends. The variable pitch of the coils may be greatest at a plurality of outer sections and smallest between the outer sections at the center section. The heating element may additionally include a plurality of contact portions. The heating portion may be positioned between the contact portions.

In some embodiments the wire may further define a plurality of end portion coils defining a first pitch. The contact portions may be positioned between the end portion coils and may define a second pitch that is less than the first pitch. The aerosol production assembly may additionally include a first heater terminal and a second heater terminal. The contact portions of the heating element may respectively contact one of the first heater terminal and the second heater terminal.

6

In an additional aspect a method of forming an atomizer is provided. The method may include providing a liquid transport element. Additionally, the method may include providing a wire. Further, the method may include coupling the wire to the liquid transport element such that the wire extends along at least a portion of a longitudinal length of the liquid transport element and defines at least one heating element. The heating element may include a plurality of coils of the wire including a heating portion at which the coils may define a variable pitch. The variable pitch of the coils may be greatest at a plurality of outer sections and smallest at a center section positioned between the outer sections.

In some embodiments coupling the wire to the liquid transport element may include continuously winding the wire about the liquid transport element from a first liquid transport end to a second liquid transport end. Coupling the wire to the liquid transport element may include inserting a first wire end at least partially through the liquid transport element, and rotating at least one of the wire and the liquid transport element. Coupling the wire to the liquid transport element may further include inserting a second wire end at least partially through the liquid transport element. Coupling the wire to the liquid transport element may include winding the wire such that the heating element includes a plurality of contact portions. The heating portion may be positioned between the contact portions. Coupling the wire to the liquid transport element may additionally include winding the wire to define a plurality of end portion coils defining a first pitch. The contact portions may be positioned between the end portion coils and may define a second pitch that is less than the first pitch.

In some embodiments the method may additionally include providing a first heater terminal and a second heater terminal. Additionally, the method may include respectively engaging the contact portions of the heating element with the first heater terminal and the second heater terminal. Coupling the wire to the liquid transport element may include defining a plurality of heating elements. The method may additionally include cutting the liquid transport element and the wire to separate one of the heating elements and a segment of the liquid transport element therefrom.

In an additional aspect an atomizer for an aerosol delivery device is provided. The atomizer may include a liquid transport element and a wire wound about the liquid transport element to define a heating element comprising a plurality of coils of the wire. The wire may extend at least partially through the liquid transport element at one or both of first and second wire ends.

In some embodiments the liquid transport element may extend between first and second liquid transport ends, and the wire may not extend to the liquid transport ends. The wire ends may extend through the liquid transport element substantially transversely to a longitudinal length of the liquid transport element. The heating element may additionally include a plurality of contact portions positioned proximate the wire ends and a heating portion positioned between the contact portions. A pitch of the coils at the contact portions may be less than a pitch of the coils at the heating portion.

In some embodiments the coils at the heating portion may define a variable pitch. The variable pitch of the coils at the heating portion may be greatest at a plurality of outer sections and smallest at a center section positioned between the outer sections. The atomizer may additionally include first and second heater terminals. Each of the heater termi-

nals may be affixed to a respective one of the contact portions of the heating element.

These and other features, aspects, and advantages of the disclosure will be apparent from a reading of the following detailed description together with the accompanying drawings, which are briefly described below.

BRIEF DESCRIPTION OF THE FIGURES

Having thus described the disclosure in the foregoing general terms, reference will now be made to the accompanying drawings, which are not necessarily drawn to scale, and wherein:

FIG. 1 illustrates a sectional view through a smoking article comprising a control body and a cartridge including an atomizer according to an example embodiment of the present disclosure;

FIG. 2 illustrates an exploded view of a cartridge for a smoking article comprising a base, a control component terminal, an electronic control component, an atomizer including a liquid transport element, a wire, and heater terminals, a reservoir substrate, an external shell, and a mouthpiece according to an example embodiment of the present disclosure;

FIG. 3 illustrates an enlarged exploded view of the base and the control component terminal of the cartridge of FIG. 2;

FIG. 4 illustrates an enlarged perspective view of the base and the control component terminal of FIG. 2 in an assembled configuration;

FIG. 5 illustrates an enlarged perspective view of the base, the control component terminal, the electronic control component, and the heater terminals of FIG. 2 in an assembled configuration;

FIG. 6 illustrates an enlarged perspective view of the base, the control component terminal, the electronic control component, and atomizer of FIG. 2 in an assembled configuration;

FIG. 7 illustrates an enlarged bottom perspective view of the base, the control component terminal, the electronic control component, and the atomizer of FIG. 2 in an assembled configuration;

FIG. 8 illustrates a perspective view of the base, the atomizer, and the reservoir substrate of FIG. 2 in an assembled configuration;

FIG. 9 illustrates a perspective view of the base and the external shell of FIG. 2 in an assembled configuration;

FIG. 10 illustrates a perspective view of the cartridge of FIG. 2 in an assembled configuration;

FIG. 11 illustrates a first partial perspective view of the cartridge of FIG. 2 and a receptacle for a control body according to an example embodiment of the present disclosure;

FIG. 12 illustrates an opposing second partial perspective view of the cartridge of FIG. 2 and the receptacle of FIG. 11;

FIG. 13 illustrates a partial side view of an input for production of a plurality of atomizers comprising a liquid transport element and a wire continuously wound about the liquid transport element according to an example embodiment of the present disclosure;

FIG. 14 illustrates an enlarged view of section A from FIG. 13;

FIG. 15 illustrates the base, electronic control component, control component terminal and heater terminals of FIG. 2 partially assembled with a segment of the input of FIG. 13 to form an atomizer;

FIG. 16 illustrates a modified cross-sectional view through a cartridge comprising the atomizer of FIG. 15;

FIG. 17 illustrates a partially exploded view of an aerosol delivery device including a control body in an assembled configuration and a cartridge in an exploded configuration, the cartridge comprising a base shipping plug, a base, a control component terminal, an electronic control component, a flow tube, an atomizer, a reservoir substrate, an external shell, a label, a mouthpiece, and a mouthpiece shipping plug according to an example embodiment of the present disclosure;

FIG. 18 illustrates an enlarged perspective view of the base, the atomizer, the flow tube, and the reservoir substrate of FIG. 17 in an assembled configuration;

FIG. 19 illustrates an enlarged partial view of an input for production of a plurality of atomizers comprising a liquid transport element and a wire according to an alternate embodiment of the present disclosure in which the wire is not continuously wound about the liquid transport element;

FIG. 20 illustrates a schematic view of a method of forming a plurality of atomizers according to an example embodiment of the present disclosure;

FIG. 21 illustrates a partial side view of an input for production of a plurality of atomizers comprising a liquid transport element and a wire continuously wound about the liquid transport element and including heating elements with a variable coil spacing according to an example embodiment of the present disclosure;

FIG. 22 illustrates an enlarged view of section B from FIG. 21;

FIG. 23 illustrates an aerosol production assembly including an atomizer from the input of FIG. 1, a flow director, and a reservoir substrate according to an example embodiment of the present disclosure;

FIG. 24 illustrates an enlarged partial view of an input for production of a plurality of atomizers comprising a liquid transport element and a wire wound about the liquid transport element and including heating elements with a variable coil spacing according to an alternate embodiment of the present disclosure in which the wire is not continuously wound about the liquid transport element;

FIG. 25 illustrates an enlarged perspective view of a heating element in which an end of a wire is directed through a liquid transport element and the wire is wrapped about the liquid transport element according to an example embodiment of the present disclosure;

FIG. 26 illustrates an enlarged perspective view of a heating element with a variable coil spacing in which an end of a wire is directed through a liquid transport element and the wire is wrapped about the liquid transport element according to an example embodiment of the present disclosure; and

FIG. 27 schematically illustrates a method of forming a plurality of atomizers according to an example embodiment of the present disclosure.

DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

The present disclosure will now be described more fully hereinafter with reference to exemplary embodiments thereof. These exemplary embodiments are described so that this disclosure will be thorough and complete, and will fully convey the scope of the disclosure to those skilled in the art. Indeed, the disclosure may be embodied in many different forms and should not be construed as limited to the embodiments set forth herein; rather, these embodiments are pro-

vided so that this disclosure will satisfy applicable legal requirements. As used in the specification, and in the appended claims, the singular forms “a”, “an”, “the”, include plural referents unless the context clearly dictates otherwise.

The present disclosure provides descriptions of aerosol delivery devices that use electrical energy to heat a material (preferably without combusting the material to any significant degree) to form an inhalable substance; such articles most preferably being sufficiently compact to be considered “hand-held” devices. In certain highly preferred embodiments, the aerosol delivery devices can be characterized as smoking articles such as electronic cigarettes. As used herein, the term “smoking article” is intended to mean an article or device that provides some or all of the sensations (e.g., inhalation and exhalation rituals, types of tastes or flavors, organoleptic effects, physical feel, use rituals, visual cues such as those provided by visible aerosol, and the like) of smoking a cigarette, cigar, or pipe, without any substantial degree of combustion of any component of that article or device. As used herein, the term “smoking article” does not necessarily mean that, in operation, the article or device produces smoke in the sense of the aerosol resulting from by-products of combustion or pyrolysis of tobacco, but rather, that the article or device yields vapors (including, e.g., vapors within aerosols that can be considered to be visible aerosols that might be considered to be described as smoke-like) resulting from volatilization or vaporization of certain components of the article or device. In highly preferred embodiments, articles or devices characterized as smoking articles incorporate tobacco and/or components derived from tobacco.

Articles or devices of the present disclosure also can be characterized as being vapor-producing articles, aerosol delivery articles or medicament delivery articles. Thus, such articles or devices can be adapted so as to provide one or more substances (e.g., flavors and/or pharmaceutical active ingredients) in an inhalable form or state. For example, inhalable substances can be substantially in the form of a vapor (i.e., a substance that is in the gas phase at a temperature lower than its critical point). Alternatively, inhalable substances can be in the form of an aerosol (i.e., a suspension of fine solid particles or liquid droplets in a gas). For purposes of simplicity, the term “aerosol” as used herein is meant to include vapors, gases and aerosols of a form or type suitable for human inhalation, whether or not visible, and whether or not of a form that might be considered to be smoke-like.

In use, smoking articles of the present disclosure may be subjected to many of the physical actions employed by an individual in using a traditional type of smoking article (e.g., a cigarette, cigar or pipe that is employed by lighting and inhaling tobacco). For example, the user of a smoking article of the present disclosure can hold that article much like a traditional type of smoking article, draw on one end of that article for inhalation of aerosol produced by that article, take puffs at selected intervals of time, etc.

Smoking articles of the present disclosure generally include a number of components provided within an outer shell or body. The overall design of the outer shell or body can vary, and the format or configuration of the outer body defining the overall size and shape of the smoking article can vary. Typically, an elongated body resembling the shape of a cigarette or cigar can be a formed from a single, unitary shell; or the elongated body can be formed of two or more separable pieces. For example, a smoking article can comprise an elongated shell or body that can be substantially

tubular in shape and, as such, resemble the shape of a conventional cigarette or cigar. In one embodiment, all of the components of the smoking article can be contained within one outer body or shell. Alternatively, a smoking article can comprise two or more shells that are joined and are separable. For example, a smoking article can possess at one end a control body comprising a shell containing one or more reusable components (e.g., a rechargeable battery and various electronics for controlling the operation of that article), and at the other end and removably attached thereto a shell containing a disposable portion (e.g., a disposable flavor-containing cartridge). More specific formats, configurations and arrangements of components within the single shell type of unit or within a multi-piece separable shell type of unit will be evident in light of the further disclosure provided herein. Additionally, various smoking article designs and component arrangements can be appreciated upon consideration of the commercially available electronic smoking articles, such as those representative products listed in the background art section of the present disclosure. Further, various other embodiments of aerosol delivery devices may include the atomizers and other components described herein. In this regard, an example embodiment of an aerosol delivery device comprising multiple outer bodies and a coupler is described in U.S. patent application Ser. No. 14/170,838, filed Feb. 3, 2014, to Bless et al., which is incorporated herein by reference in its entirety.

Smoking articles of the present disclosure most preferably comprise some combination of a power source (i.e., an electrical power source), at least one control component (e.g., means for actuating, controlling, regulating and ceasing power for heat generation, such as by controlling electrical current flow from the power source to other components of the article), a heater or heat generation component (e.g., an electrical resistance heating element or component commonly referred to as an “atomizer”), and an aerosol precursor composition (e.g., commonly a liquid capable of yielding an aerosol upon application of sufficient heat, such as ingredients commonly referred to as “smoke juice,” “e-liquid” and “e-juice”), and a mouthend region or tip for allowing draw upon the smoking article for aerosol inhalation (e.g., a defined air flow path through the article such that aerosol generated can be withdrawn therefrom upon draw).

Alignment of the components within the article can vary. In specific embodiments, the aerosol precursor composition can be located near an end of the article (e.g., within a cartridge, which in certain circumstances can be replaceable and disposable), which may be proximal to the mouth of a user so as to maximize aerosol delivery to the user. Other configurations, however, are not excluded. Generally, the heating element can be positioned sufficiently near the aerosol precursor composition so that heat from the heating element can volatilize the aerosol precursor (as well as one or more flavorants, medicaments, or the like that may likewise be provided for delivery to a user) and form an aerosol for delivery to the user. When the heating element heats the aerosol precursor composition, an aerosol is formed, released, or generated in a physical form suitable for inhalation by a consumer. It should be noted that the foregoing terms are meant to be interchangeable such that reference to release, releasing, releases, or released includes form or generate, forming or generating, forms or generates, and formed or generated. Specifically, an inhalable substance is released in the form of a vapor or aerosol or mixture thereof. Additionally, the selection of various smoking article components can be appreciated upon consideration of the commercially available electronic smoking articles, such

as those representative products listed in the background art section of the present disclosure.

A smoking article incorporates a battery or other electrical power source to provide current flow sufficient to provide various functionalities to the article, such as resistive heating, powering of control systems, powering of indicators, and the like. The power source can take on various embodiments. Preferably, the power source is able to deliver sufficient power to rapidly heat the heating member to provide for aerosol formation and power the article through use for the desired duration of time. The power source preferably is sized to fit conveniently within the article so that the article can be easily handled; and additionally, a preferred power source is of a sufficiently light weight to not detract from a desirable smoking experience.

One example embodiment of an aerosol delivery device in the form of a smoking article **100** is provided in FIG. 1. As seen in the cross-section illustrated therein, the smoking article **100** can comprise a control body **102** and a cartridge **104** that can be permanently or detachably aligned in a functioning relationship. Although a threaded engagement is illustrated in FIG. 1, it is understood that further means of engagement are encompassed, such as a press-fit engagement, interference fit, a magnetic engagement, or the like.

In specific embodiments, one or both of the control body **102** and the cartridge **104** may be referred to as being disposable or as being reusable. For example, the control body may have a replaceable battery or may be rechargeable and thus may be combined with any type of recharging technology, including connection to a typical electrical outlet, connection to a car charger (i.e., cigarette lighter receptacle), and connection to a computer, such as through a USB cable.

In the exemplified embodiment, the control body **102** includes a control component **106**, a flow sensor **108**, and a battery **110**, which can be variably aligned, and can include a plurality of indicators **112** at a distal end **114** of an external shell **116**. The indicators **112** can be provided in varying numbers and can take on different shapes and can even be an opening in the body (such as for release of sound when such indicators are present).

An air intake **118** may be positioned in the external shell **116** of the control body **102**. A receptacle **120** also is included at a proximal attachment end **122** of the control body **102** and extends into a control body projection **124** to allow for ease of electrical connection with an atomizer or a component thereof, such as a resistive heating element (described below) when the cartridge **104** is attached to the control body.

The cartridge **104** includes an external shell **126** with a mouth opening **128** at a mouthend **130** thereof to allow passage of air and entrained vapor (i.e., the components of the aerosol precursor composition in an inhalable form) from the cartridge to a consumer during draw on the smoking article **100**. The smoking article **100** may be substantially rod-like or substantially tubular shaped or substantially cylindrically shaped in some embodiments.

The cartridge **104** further includes an atomizer **132** comprising a resistive heating element **134** comprising a wire coil in the illustrated embodiment and a liquid transport element **136** comprising a wick in the illustrated embodiment that is configured to transport a liquid. Various embodiments of materials configured to produce heat when electrical current is applied therethrough may be employed to form the wire coil. Example materials from which the wire coil may be formed include Kanthal (FeCrAl), Nichrome, Molybdenum disilicide (MoSi₂), molybdenum silicide

(MoSi), Molybdenum disilicide doped with Aluminum (Mo(Si,Al)₂), and ceramic (e.g., a positive temperature coefficient ceramic). The liquid transport element may also be formed from a variety of materials configured to transport a liquid. For example, the liquid transport element may comprise cotton and/or fiberglass in some embodiments. Electrically conductive heater terminals **138** (e.g., positive and negative terminals) at the opposing ends of the heating element **134** are configured to direct current flow through the heating element and configured for attachment to the appropriate wiring or circuit (not illustrated) to form an electrical connection of the heating element with the battery **110** when the cartridge **104** is connected to the control body **102**. Specifically, a plug **140** may be positioned at a distal attachment end **142** of the cartridge **104**. When the cartridge **104** is connected to the control body **102**, the plug **140** engages the receptacle **120** to form an electrical connection such that current controllably flows from the battery **110**, through the receptacle and plug, and to the heating element **134**. The external shell **126** of the cartridge **104** can continue across the distal attachment end **142** such that this end of the cartridge is substantially closed with the plug **140** protruding therefrom.

A reservoir may utilize the liquid transport element **136** to transport an aerosol precursor composition to an aerosolization zone. One such example is shown in FIG. 1. As seen therein, the cartridge **104** includes a reservoir layer **144** comprising layers of nonwoven fibers formed into the shape of a tube encircling the interior of the external shell **126** of the cartridge, in this embodiment. An aerosol precursor composition is retained in the reservoir layer **144**. Liquid components, for example, can be sorptively retained by the reservoir layer **144**. The reservoir layer **144** is in fluid connection with the liquid transport element **136** (the wick in this embodiment). The liquid transport element **136** transports the aerosol precursor composition stored in the reservoir layer **144** via capillary action to an aerosolization zone **146** of the cartridge **104**. As illustrated, the liquid transport element **136** may be in direct contact with the heating element **134** that is in the form of a metal wire coil in this embodiment.

In use, when a user draws on the article **100**, the heating element **134** is activated (e.g., such as via a puff sensor), and the components for the aerosol precursor composition are vaporized in the aerosolization zone **146**. Drawing upon the mouthend **130** of the article **100** causes ambient air to enter the air intake **118** and pass through the central opening in the receptacle **120** and the central opening in the plug **140**. In the cartridge **104**, the drawn air passes through an air passage **148** in an air passage tube **150** and combines with the formed vapor in the aerosolization zone **146** to form an aerosol. The aerosol may be whisked away from the aerosolization zone **146**, pass through an air passage **152** in an air passage tube **154**, and out the mouth opening **128** in the mouthend **130** of the article **100**.

It is understood that a smoking article that can be manufactured according to the present disclosure can encompass a variety of combinations of components useful in forming an electronic smoking article. Reference is made for example to the smoking articles disclosed in U.S. Pat. Pub. No. 2014/0000638 to Sebastian et al., U.S. Pat. Pub. No. 2013/0255702 to Griffith et al., U.S. patent application Ser. No. 13/602,871, filed Sep. 4, 2012, to Collett et al., the disclosures of which are incorporated herein by reference in their entireties. Further to the above, representative heating elements and materials for use therein are described in U.S. Pat. No. 5,060,671 to Counts et al.; U.S. Pat. No. 5,093,894

to Deevi et al.; U.S. Pat. No. 5,224,498 to Deevi et al.; U.S. Pat. No. 5,228,460 to Sprinkel Jr., et al.; U.S. Pat. No. 5,322,075 to Deevi et al.; U.S. Pat. No. 5,353,813 to Deevi et al.; U.S. Pat. No. 5,468,936 to Deevi et al.; U.S. Pat. No. 5,498,850 to Das; U.S. Pat. No. 5,659,656 to Das; U.S. Pat. No. 5,498,855 to Deevi et al.; U.S. Pat. No. 5,530,225 to Hajaligol; U.S. Pat. No. 5,665,262 to Hajaligol; U.S. Pat. No. 5,573,692 to Das et al.; and U.S. Pat. No. 5,591,368 to Fleischhauer et al., the disclosures of which are incorporated herein by reference in their entireties. Further, a single-use cartridge for use with an electronic smoking article is disclosed in U.S. patent application Ser. No. 13/603,612, filed Sep. 5, 2012, to Chang et al., which is incorporated herein by reference in its entirety.

The various components of a smoking article according to the present disclosure can be chosen from components described in the art and commercially available. Examples of batteries that can be used according to the disclosure are described in U.S. Pat. App. Pub. No. **2010/0028766** to Peckerar et al., the disclosure of which is incorporated herein by reference in its entirety.

An exemplary mechanism that can provide puff-actuation capability includes a Model 163PC01D36 silicon sensor, manufactured by the MicroSwitch division of Honeywell, Inc., Freeport, Ill. Further description of current regulating circuits and other control components, including microcontrollers that can be useful in the present smoking article, are provided in U.S. Pat. No. 4,735,217 to Gerth et al., U.S. Pat. Nos. 4,922,901, 4,947,874, and 4,947,875, all to Brooks et al., U.S. Pat. No. 5,372,148 to McCafferty et al., U.S. Pat. No. 6,040,560 to Fleischhauer et al., U.S. Pat. No. 7,040,314 to Nguyen et al., and U.S. Pat. No. 8,205,622 to Pan, all of which are incorporated herein by reference in their entireties. Reference also is made to the control schemes described in U.S. applicaiton Ser. No. 13/837,542 to Ampolini et al., filed Mar. 15, 2013, which is incorporated herein by reference in its entirety. In some embodiments, a pressure sensor and a microcontroller may be combined in a control module.

The aerosol precursor composition, also referred to as a vapor precursor composition, may comprise a variety of components including, by way of example, a polyhydric alcohol (e.g., glycerin, propylene glycol, or a mixture thereof), nicotine, tobacco, tobacco extract, and/or flavorants. Various components that may be included in the aerosol precursor composition are described in U.S. Pat. No. 7,726,320 to Robinson et al., which is incorporated herein by reference in its entirety. Additional representative types of aerosol precursor compositions are set forth in U.S. Pat. No. 4,793,365 to Sensabaugh, Jr. et al.; U.S. Pat. No. 5,101,839 to Jakob et al.; PCT WO 98/57556 to Biggs et al.; and Chemical and Biological Studies on New Cigarette Prototypes that Heat Instead of Burn Tobacco, R. J. Reynolds Tobacco Company Monograph (1988); the disclosures of which are incorporated herein by reference in their entireties. Other aerosol precursors which may be employed in the aerosol delivery device of the present disclosure include the aerosol precursors included in the VUSE® product by R. J. Reynolds Vapor Company, the BLU™ product by Lorillard Technologies, the Mystic Menthol product by Mystic Ecigs, and the Vype product by CN Creative Ltd. Also desirable are the so-called “Smoke Juices” for electronic cigarettes that have been available from Johnson Creek Enterprises LLC. Additional exemplary formulations for aerosol precursor materials that may be used according to the present disclosure are described in U.S. Pat. Pub. No. 2013/0008457 to Zheng et al., the disclosure of which is incorporated herein by reference in its entirety.

Still further components can be utilized in the smoking article of the present disclosure. For example, U.S. Pat. No. 5,261,424 to Sprinkel, Jr. discloses piezoelectric sensors that can be associated with the mouth-end of a device to detect user lip activity associated with taking a draw and then trigger heating; U.S. Pat. No. 5,372,148 to McCafferty et al. discloses a puff sensor for controlling energy flow into a heating load array in response to pressure drop through a mouthpiece; U.S. Pat. No. 5,967,148 to Harris et al. discloses receptacles in a smoking device that include an identifier that detects a non-uniformity in infrared transmissivity of an inserted component and a controller that executes a detection routine as the component is inserted into the receptacle; U.S. Pat. No. 6,040,560 to Fleischhauer et al. describes a defined executable power cycle with multiple differential phases; U.S. Pat. No. 5,934,289 to Watkins et al. discloses photonic-optronic components; U.S. Pat. No. 5,954,979 to Counts et al. discloses means for altering draw resistance through a smoking device; U.S. Pat. No. 6,803,545 to Blake et al. discloses specific battery configurations for use in smoking devices; U.S. Pat. No. 7,293,565 to Griffen et al. discloses various charging systems for use with smoking devices; U.S. Pat. No. 8,402,976 to Fernando et al. discloses computer interfacing means for smoking devices to facilitate charging and allow computer control of the device; U.S. Pat. App. Pub. No. 2010/0163063 by Fernando et al. discloses identification systems for smoking devices; and WO 2010/003480 by Flick discloses a fluid flow sensing system indicative of a puff in an aerosol generating system; all of the foregoing disclosures being incorporated herein by reference in their entireties. Further examples of materials and components related to electronic aerosol delivery articles that may be used in the present article are described in U.S. Pat. No. 4,735,217 to Gerth et al.; U.S. Pat. No. 5,249,586 to Morgan et al.; U.S. Pat. No. 5,666,977 to Higgins et al.; U.S. Pat. No. 6,053,176 to Adams et al.; U.S. Pat. No. 6,164,287 to White; U.S. Pat. No. 6,196,218 to Voges; U.S. Pat. No. 6,810,883 to Felter et al.; U.S. Pat. No. 6,854,461 to Nichols; U.S. Pat. No. 7,832,410 to Hon; U.S. Pat. No. 7,513,253 to Kobayashi; U.S. Pat. No. 7,896,006 to Hamano; U.S. Pat. No. 6,772,756 to Shayan; U.S. Pat. No. 8,156,944 to Hon; U.S. Pat. No. 8,375,957 to Hon; U.S. Pat. App. Pub. Nos. 2006/0196518, and 2009/0188490 to Hon; U.S. Pat. App. Pub. No. 2009/0272379 to Thorens et al.; U.S. Pat. App. Pub. Nos. 2009/0260641 and 2009/0260642 to Monsees et al.; U.S. Pat. App. Pub. Nos. 2008/0149118 and 2010/0024834 to Oglesby et al.; U.S. Pat. App. Pub. No. 2010/0307518 to Wang; and WO 2010/091593 to Hon. A variety of the materials disclosed by the foregoing documents may be incorporated into the present devices in various embodiments, and all of the foregoing disclosures are incorporated herein by reference in their entireties.

FIG. 2 illustrates an exploded view of an additional example embodiment of a cartridge **200** for a smoking article. The cartridge **200** may comprise a base **202**, a control component terminal **204**, an electronic control component **206**, an atomizer **208**, a reservoir substrate **210**, an external shell **212**, and a mouthpiece **214**. As described in greater detail below, the atomizer **208** may comprise a liquid transport element **216**, a heating element **218**, and a first heater terminal **220a** and a second heater terminal **220b** (collectively, “heater terminals **220**”). Note that the various embodiments of components described above in the cited references and/or included in commercially available aerosol delivery devices may be employed in embodiments of the cartridges described herein.

15

The cartridge **200** may be configured to couple to a control body to form a smoking article. Note that some of the above-described components of the cartridge **200** are optional. In this regard, by way of example, the cartridge **200** may exclude the control component terminal **204** and the electronic control component **206** in some embodiments.

FIG. 3 illustrates an enlarged exploded view of the base **202** and the control component terminal **204**. The control component terminal **204** may define a clip **222** configured to engage the electronic control component **206** and form an electrical connection therewith. Note that while the clip is illustrated as defining a “u-shape,” various other configurations configured to engage a contact on the electronic control component **206** may be employed. For example, the clip **222** may define an “inverted u-shape” in other embodiments in order to engage the contact on the electronic control component **206**. Further, the control component terminal **204** may include one or more protrusions **224a**, **224b** configured to engage the base **202**, for example via interference fit, such that the control component terminal **204** is retained in engagement therewith. An end **226** of the control component terminal **204** may be configured to engage a control body, so as to establish an electrical connection therewith.

As illustrated, the base **202** may define a receptacle **228** configured to receive the control component terminal **204** therein. In this regard, as illustrated in FIG. 4, the control component terminal **204** may couple to the base **202**. For example, the control component terminal **204** may be retained in the receptacle **228** of the base **202** via interference fit, for example due to contact between the protrusions **224a**, **224b** and the base. As described below, the control component terminal **204** may extend through the base **202** to a position at which it may form an electrical connection with a control body to which the cartridge **200** connects. Further, the base **202** may define threads or protrusions **230** configured to engage the external shell **212**, as will be described below.

As illustrated in FIG. 5, the control component terminal **204** may couple to the electronic control component **206** such that an electrical connection is established therebetween. Accordingly, when the cartridge **200** is coupled to a control body, the electronic control component **206** may communicate therewith through the control component terminal **204**. The electronic control component **206** may be configured to perform one or more of a variety of functions. Further, the electronic control component **206** may be configured as purpose-specific analog and/or digital circuitry with or without a processor, or the electronic control component may comprise hardware, software, or a combination of hardware and software. Accordingly, any or all of the functions performed by or in conjunction with the electronic control component **206** may be embodied in a computer-readable storage medium having computer-readable program code portions stored therein that, in response to execution by a processor, cause an apparatus to at least perform or direct the recited functions. In one particular instance, upon establishment of communication between the electronic control component **206** and a control body, the electronic control component may be configured to provide an authentication code or other appropriate indicia to the control body. In such instances, the control body may be configured to evaluate the authentication indicia to determine whether the cartridge **200** is authorized for use with the control body. However, the electronic control component **206** may perform various other functions. Various examples of electronic control components and functions performed thereby are described in U.S. patent application Ser. No.

16

13/647,000, filed Oct. 8, 2012, to Sears et al., which is incorporated herein by reference in its entirety.

Further, as illustrated in FIG. 2, in some embodiments the electronic control component **206** may comprise two portions **206a**, **206b**. A first portion **206a** of the electronic control component **206** may include hardware and/or software configured to perform one or more functions (e.g., as described above), whereas the second portion **206b** of the electronic control component may provide structural support thereto. Accordingly, the electronic control component **206** may be provided in two-piece form in some embodiments. This form may allow for substitution of the first portion **206a**, as may be desirable to change the functionality of the electronic control component **206**, while still employing the same second portion **206b** for structural support.

As illustrated in FIG. 5, heater terminals **220** may define a plurality of walls, which may extend at least partially around the electronic control component **206** in some embodiments such that the electronic control component is received therebetween. This configuration may allow the heater terminals **220** to provide support to the electronic control component **206**, for example by contact therewith, such that the electronic control component is securely retained in place. In the illustrated embodiment, each terminal **220** respectively defines a first wall **232a**, and a second wall **232b**, which may be substantially perpendicular to one another. Further, the heater terminals **220** may define first and second tabs **234a**, **234b** (collectively, “tabs **234**”). The tabs **234** may be positioned at the end of the heater terminals **220** distal to the base **202**. In some embodiments the heater terminals **220** may be stamped or otherwise formed from a sheet of a metal material. However, the heater terminals **220** may be formed in various other manners and formed from any of a variety of conductive materials.

FIG. 6 illustrates the completed atomizer **208** coupled to the base **202** via the heater terminals **220**. As illustrated in FIG. 6, the tabs **234** may be substantially parallel to the second walls **232b** of the terminals **220**. This configuration may assist in retaining the liquid transport element **216** in place, because the liquid transport element may be received between opposing faces defined by the second walls **232b** and the tabs **234**.

In this regard, as further illustrated in FIG. 6, the liquid transport element **216** may be configured in a substantially U-shaped configuration. The liquid transport element **216**, which may comprise a wick (e.g., a fiberglass wick) in some embodiments, may be either preformed in the U-shaped configuration or bent to define this configuration. A first distal arm **236a** and a second distal arm **236b** (collectively, “distal arms **236**”) of the liquid transport element **216** may respectively extend along the first and second heater terminals **220a**, **220b** and respectively terminate at a first liquid transport element end **238a** and a second liquid transport element end **238b** (collectively, “liquid transport element ends **238**”). Further a center section **236c** of the liquid transport element **216**, at which the heating element **218** is positioned, may extend between the heater terminals **220**.

The heating element **218** extends at least partially about the liquid transport element **216** at a position between the first liquid transport element end **238a** and the second liquid transport element end **238b**. In some embodiments, the heating element **218** may comprise a wire **240** defining a plurality of coils wound about the liquid transport element **216** and extending between a first wire end **242a** and a second wire end **242b** (collectively, “wire ends **242**”), as illustrated in FIG. 6. The wire **240** may comprise a material configured to produce heat when electrical current is pro-

vided therethrough. For example, the wire **240** may comprise Kanthal (FeCrAl), Nichrome, Molybdenum disilicide (MoSi₂), molybdenum silicide (MoSi), Molybdenum disilicide doped with Aluminum (Mo(Si,Al)₂), or ceramic (e.g., a positive temperature coefficient ceramic) in some embodiments, although various other materials may be employed in other embodiments. In some embodiments the heating element **218** may be formed by winding the wire **240** about the liquid transport element **216** as described in U.S. patent application Ser. No. 13/708,381, filed Dec. 7, 2012, which is incorporated herein by reference in its entirety. However, various other embodiments of methods may be employed to form the heating element **218**, and various other embodiments of heating elements may be employed in the atomizer **208**.

The tabs **234** may be configured to contact the wire ends **242** such that an electrical connection is established therebetween. In this regard, the tabs **234** may be configured to be positioned adjacent to the heating element **218** such that the tabs directly contact one or more coils of the wire **240**. Direct contact, as used herein, refers to physical contact between the wire **240** and the heater terminals **220**. However, direct contact, as used herein, also encompasses embodiments in which one or more welds couple the wire **240** and the heater terminals **220**. A weld, as used herein, refers to a connection made via a solder, flux, braze, or other material that is deposited in liquid or molten form and hardens to form the connection or produced via melting the wire and/or the heater terminals.

In one embodiment, as illustrated in FIG. 6, the spacing of the coils (i.e. the distance therebetween) may be less proximate the wire ends **242** than proximate a center of the heating element **218**. For example, in one embodiment the coils of the heating element **218** may touch one another at the wire ends **242**, whereas the coils may be spaced apart such that there is not contact therebetween at locations between the wire ends. By decreasing the spacing between the coils of the wire **240** at the wire ends **242**, more coils may contact the tabs **234**, such that an improved electrical connection between the heating element **218** and the heater terminals **220** may be established.

As noted above, the electronic control component **206** may be received between the heater terminals **220** and the distal arms **236** of the liquid transport element **216**. However, a gap **244** may be provided between the electronic control component **206** and the heating element **218**. The gap **244** may reduce the amount of heat transferred to the electronic control component **206** from the heating element **218**, for example by preventing direct conduction therebetween. Accordingly, the risk of damage to the electronic control component **206** from exposure to heat produced by the heating element **218** may be reduced. In some embodiments, a structure, which may be referred to as a chimney, a flow director, or a flow tube, may be employed to direct airflow through the cartridge to the heating element **218** in order to precisely regulate the flow of air therethrough.

FIG. 7 illustrates an alternative perspective view of the base **202**, the control component terminal **204**, the electronic control component **206**, and the atomizer **208** after they are coupled to one another. In particular, FIG. 7 illustrates a view of a connector end **246** of the base **202**. As illustrated, a central opening **248** may be defined in the base **202**. The central opening **248** may be configured to receive airflow therethrough from a control body and direct the airflow toward the heating element **218** of the atomizer **208**.

The heater terminals **220** may engage the base **202** and respectively extend to a first end **250a** and a second end

250b (collectively, “ends **250**”), which may be configured to engage a control body, so as to establish an electrical connection therewith. In this regard, as illustrated in FIG. 7, the end **226** of the control component terminal **204** and the ends **250** of the heater terminals **220** may be exposed at the connector end **246** of the base **202**. The end **226** of the control component terminal **204** and the ends **250** of the heater terminals **220** may be located at differing positions within the base **202** such that they make connections with components at different locations within the control body, and avoid unintended contact therebetween.

In this regard, the end **226** of the control component terminal **204** and the ends **250** of the heater terminals **220** may be located at differing radial distances from the central opening **248**. In the illustrated embodiment, the end **226** of the control component terminal **204** is located closest to the central opening **248**, the second end **250b** of the second heater terminal **220b** is located farthest from the central opening, and the first end **250a** of the second heater terminal **220a** is located at a radial distance therebetween. Further, the end **226** of the control component terminal **204** and the ends **250** of the heater terminals **220** may extend to a plurality of different depths within the base **202**. In the illustrated embodiment, the end **226** of the control component terminal **204** extends through the base **202** to a greatest depth, the second end **250b** of the second heater terminal **220b** extends through the base to the smallest depth, and the first end **250a** of the first heater terminal **220a** extends through the base to a depth therebetween.

FIG. 8 illustrates a perspective view of the assembly of FIGS. 6 and 7 after the reservoir substrate **210** is coupled thereto. The reservoir substrate **210** may be configured to hold an aerosol precursor composition. The aerosol precursor composition may comprise a variety of components including, by way of example, glycerin, nicotine, tobacco, tobacco extract, and/or flavorants. Various components that may be included in the aerosol precursor composition are described in U.S. Pat. No. 7,726,320 to Robinson et al., which is incorporated herein by reference.

The reservoir substrate **210** may define a cavity **252** extending therethrough from a first reservoir end **254a** to a second reservoir end **254b** (collectively, “reservoir ends **254**”), wherein the first reservoir end is positioned proximate the base **202**. In this regard, the reservoir substrate **210** may define a hollow tubular configuration. Note that although generally described herein as defining a hollow tubular configuration, the reservoir substrate **210** may define other shapes and configurations in other embodiments. The aerosol precursor composition may be retained within the material defining the reservoir substrate **210** itself, as opposed to within the cavity **252**. This configuration may allow for airflow through the base **202**, into and through the cavity **252**, and past the heating element **218**.

The reservoir substrate **210** can comprise one or more of various materials and can be formed in a variety of different manners. In one embodiment the reservoir substrate **210** can be formed from a plurality of combined layers that can be concentric or overlapping. For example, the reservoir substrate **210** can be a continuous sheet of a material that is rolled to form the hollow tubular configuration. In other embodiments, the reservoir substrate **210** can be substantially a unitary component. For example, the reservoir substrate **210** can be shaped or molded so as to be a singular preformed element in the form of a substantially hollow tube, which may be substantially continuous in composition across the length and thickness thereof.

The reservoir substrate **210** can be formed from a material that is rigid or semi-rigid in some embodiments, while retaining the ability to store a liquid product such as, for example, an aerosol precursor composition. In certain embodiments, the material of the reservoir substrate **210** can be absorbent, adsorbent, or otherwise porous so as to provide the ability to retain the aerosol precursor composition. As such, the aerosol precursor composition can be characterized as being coated on, adsorbed by, or absorbed in the material of the reservoir substrate **210**. The reservoir substrate **210** can be positioned within the cartridge **200** such that the reservoir substrate is in contact with the liquid transport element **216**. More particularly, the reservoir substrate **210** can be manufactured from any material suitable for retaining the aerosol precursor composition (e.g., through absorption, adsorption, or the like) and allowing wicking away of the precursor composition for transport to the heating element **218**.

The material of the reservoir substrate **210** may be suitable for forming and maintaining an appropriate shape. The material of the reservoir substrate **210** can be heat resistant so as to retain its structural integrity and avoid degradation at least at a temperature proximal to the heating temperature provided by the heating element **218**. However, the reservoir substrate **210** need not be heat resistant to the full temperature produced by the heating element **218** due to the reservoir substrate being out of contact therewith. The size and strength of the reservoir substrate **210** may vary according to the features and requirements of the cartridge **200**. In particular embodiments, the reservoir substrate **210** can be manufactured from a material suitable for a high-speed, automated manufacturing process. Such processes may reduce manufacturing costs compared to traditional woven or non-woven fiber mats. According to one embodiment, the reservoir can be manufactured from a cellulose acetate tow which can be processed to form a hollow acetate tube.

In certain embodiments, the reservoir substrate **210** can be provided in a form such that at least part of the cavity **252** is shaped and dimensioned to accommodate one or more other components of the cartridge **200**. In some embodiments, the term “shaped and dimensioned” can indicate that a wall of the reservoir substrate **210** at the cavity **252** includes one or more indentations or protrusions that cause the interior of the reservoir substrate to have a shape that is other than substantially smooth and continuous. In other embodiments, the hollow nature of the reservoir substrate **210** can be sufficient to allow for accommodation of further components of the cartridge **200** without the need for formation of cavities or protrusions. Thus, the cartridge **200** can be particularly beneficial in that the reservoir substrate **210** can be pre-formed and can have a hollow interior defining the cavity **252** with a wall that is shaped and dimensioned to accommodate a further component of the cartridge in a mating arrangement. This particularly can facilitate ease of assembly of the cartridge **200** and can maximize the volume of the reservoir substrate **210** while also providing sufficient space for aerosol formation.

In the illustrated embodiment, the cavity **252** extending through the reservoir substrate **210** is shaped and dimensioned to accommodate at least a portion of the atomizer **208**. Specifically, the reservoir substrate **210** includes two diametrically opposed grooves **256a**, **256b** (collectively, “grooves **256**”) at the cavity **252**. As illustrated, the grooves **256** may extend substantially the entire length of the reservoir substrate **210** from the first end **254a** to the second end **254b** thereof. In light of the reservoir substrate **210** defining the cavity **252** therethrough, the atomizer **208** can be easily

positioned interior to the reservoir substrate during assembly of the smoking article. Likewise, since the cavity **252** is shaped and dimensioned to mate with the atomizer **208**, the combination can be easily assembled, and the atomizer can snugly mate with the reservoir substrate **210** while simultaneously placing the liquid transport element **216** in fluid connection with the reservoir substrate.

In this regard, the grooves **256** may be configured to receive the liquid transport element **216** at least partially therein. More particularly, the distal arms **236** of the liquid transport element **216** may be received in the grooves **256**. Thus, the liquid transport element **216** may extend substantially entirely through the reservoir substrate **210** such that the liquid transport element ends **238** are positioned proximate the first reservoir end **254a**. Further, the heater terminals **220** may extend through the cavity **252** through the reservoir substrate **210**. In some embodiments the heater terminals **220** may be partially or fully received in the grooves **256**. Additionally, the electronic control component **206** may be at least partially received in the cavity **252** through the reservoir substrate **210**.

By adapting the cavity **252** of the reservoir substrate **210** to accommodate the atomizer **208**, and/or various other components of the cartridge **200**, available open space in the cartridge can be fully maximized by extending the reservoir substrate into the previously open spaces. As a result, the overall size and capacity of the reservoir substrate **210** can be increased in comparison to traditional woven or non-woven fiber mats that are typically utilized in electronic smoking articles. The increased capacity allows the reservoir substrate **210** to hold an increased amount of the aerosol precursor composition which may, in turn, result in longer use and enjoyment of the cartridge **200** by the end user. However, traditional wrapped fiber reservoir substrates may be employed in other embodiments.

As illustrated in FIG. 8, the atomizer **208** may extend through the cavity **252** of the reservoir substrate **210** such that the heating element **218** is positioned proximate the second reservoir end **254b**. More particularly, the atomizer **208** may extend through the cavity **252** such that the heating element **218** is positioned past the second reservoir end **254b** and is positioned outside of the cavity. This embodiment may reduce the heat directly applied by the heating element **218** to the reservoir substrate **210** such that the amount of the aerosol precursor composition vaporized by the heating element is controlled in part by the flow of the aerosol precursor composition through the liquid transport element **216** to the heating element. Accordingly, the amount of aerosol precursor composition vaporized may be more precisely controlled. However, in other embodiments, it is not necessary for the atomizer to extend beyond the second reservoir end, and the atomizer can be positioned relative to the reservoir substrate such that the heating element is received within the cavity of the reservoir substrate.

The reservoir substrate **210** includes an exterior surface **258** that can be substantially shaped and adapted to conform to an interior surface **260** (see, FIG. 9) of the external shell **212**. In this regard, the external shell **212** may define a tubular shape with a cavity **262** (see, FIG. 9) therethrough sized to receive the reservoir substrate **210**. For example, an inner radius of the external shell **212** may substantially correspond to, or may be slightly larger than, an outer radius of the reservoir substrate **210**. Accordingly, the external shell **212** may be received over the reservoir substrate **210** and coupled to the base **202**, as illustrated in FIG. 9. In this regard, one or more indentations **264** may engage the threads

21

or protrusions **230** (see, e.g., FIG. **8**) on the base **202** such that coupling is retained therebetween.

As illustrated in FIG. **10**, the external shell **212** may couple to the mouthpiece **214** such that the cavity **262** (see, FIG. **9**) defined by the external shell is at least partially enclosed. More particularly, in one embodiment one or more indentations **266** may engage threads or protrusions **268** on the mouthpiece **214** (see, e.g., FIG. **2**) such that coupling therebetween is retained. The mouthpiece **214** defines one or more openings **270** through which air mixed with aerosol produced by the atomizer **208** (see, e.g., FIG. **9**) may be directed when a user draws on the mouthpiece, as described in accordance with the above-noted example embodiments of smoking articles.

FIGS. **11** and **12** illustrate a receptacle **300** that may be included in a control body configured to engage the cartridge **200** and the various other embodiments of cartridges described herein. As illustrated, the receptacle **300** may comprise protrusions or threads **302** that are configured to engage an external shell of the control body such that a mechanical connection is formed therebetween. The receptacle **300** may define an outer surface **304** configured to mate with an inner surface **272** of the base **202**. In one embodiment the inner surface **272** of the base **202** may define a radius that is substantially equal to, or slightly greater than, a radius of the outer surface **304** of the receptacle **300**. Further, the receptacle **300** may define one or more protrusions **306** at the outer surface **304** configured to engage one or more recesses **274** defined at the inner surface **272** of the base **202**. However, various other embodiments of structures, shapes, and components may be employed to couple the base **202** to the receptacle **300**. In some embodiments the connection between the base **202** and the receptacle **300** of the control body may be substantially permanent, whereas in other embodiments the connection therebetween may be releasable such that, for example, the control body may be reused with one or more additional cartridges.

The receptacle **300** may further comprise a plurality of electrical contacts **308a-c** respectively configured to contact the end **226** of the control component terminal **204** and the ends **250** of the heater terminals **220**. The electrical contacts **308a-c** may be positioned at differing radial distances from a central opening **310** through the receptacle **300** and positioned at differing depths within the receptacle **300**. The depth and radius of each of the electrical contacts **308a-c** is configured such that the end **226** of the control component terminal **204** and the ends **250** of the heater terminals **220** respectively come into contact therewith when the base **202** and the receptacle **300** are joined together to establish an electrical connection therebetween.

In the illustrated embodiment the electrical contacts **308a-c** comprise circular metal bands of varying radii positioned at differing depths within the receptacle **300**. When the electrical contacts **308a-c** comprise circular bands and the end **226** of the control component terminal **204** and the ends **250** of the heater terminals **220** extend to corresponding depths and radii within the base **202**, electrical connections between the base and the receptacle **300** may be established regardless of the rotational orientation of the base with respect to the receptacle. Accordingly, connection between the base **202** of the cartridge **200** and the receptacle **300** of the control body may be facilitated. The electrical contacts **308a-c** may be respectively coupled to a plurality of control body terminals **312a-c** that connect to a plurality of components within the control body such as a battery and a controller therefor.

22

Further, when the base **202** of the cartridge **200** and the receptacle **300** of the control body are coupled together, a fluid connection may also be established. In this regard, the receptacle **300** may define a fluid pathway configured to receive air from an ambient environment and direct the air to the cartridge **200** when a user draws thereon. More particularly, in one embodiment the receptacle **300** may define a rim **314** with a radially extending notch **316** defined therein. Further a longitudinally extending recessed slot **318** may extend from the notch **316** to an opening **320**. The opening **320** may define a cutout or a hole through a portion of the receptacle in some embodiments. Thus, when the receptacle **300** is engaged with the end of an external shell or body of a corresponding control body, the fluid pathway through the notch **316**, the slot **318**, and the opening **320** may remain open. Air drawn through this path may then be directed through the central opening **310** of the receptacle **300** and the central opening **248** of the base **202** when the receptacle and the base are connected to one another. Thus, air may be directed from the control body through the cartridge **200** in the manner described above when a user draws on the mouthpiece **214** of the cartridge.

Accordingly, the above-described cartridge **200** may provide benefits in terms of ease of assembly and ease of attachment to the receptacle **300** of a control body. In particular, with respect to the cartridge **200**, assembly thereof may be simplified in that the components thereof may be generally axially assembled. More specifically, in one embodiment the control component terminal **204** may be coupled to the base **202**, the electronic control component **206** may be coupled to the control component terminal, the heater terminals **220** may be coupled to the base, the heating element **218** may be coupled to the liquid transport element **216** and the combination thereof may be coupled to the heater terminals to form the atomizer **208**, the reservoir substrate **210** may be coupled to the atomizer, the external shell **212** may be coupled to the base, and the mouthpiece **214** may be coupled to the external shell.

As described above, embodiments of smoking articles may employ an atomizer comprising a heating element formed from a wire coil. In the example embodiment illustrated in FIG. **6**, the heating element **218** is wound about a center section **236c** of the liquid transport element **216**. The heating element **218** does not extend to the distal arms **236a**, **236b** of the liquid transport element **216**. In this regard, production of atomizers comprising a heating element that is formed on only a portion of the length of a liquid transport element may present certain challenges that may make economical production thereof difficult. In this regard, production of heating elements that only extend along a portion of the length of the liquid transport element may require usage of a "start and stop" winding process, wherein a wire is brought into contact with and wound about the liquid transport element, extends along a section, and then stops at the desired end of the heating element, at which the wire is removed from contact with the liquid transport element. This process may then be repeated at additional spaced locations along the longitudinal length of the liquid transport element, or the process may be conducted once for an individual liquid transport element segment sized for use in the atomizer. Regardless of the particular details of the process employed, discrete production of individual heating elements may involve repeatedly starting and stopping the supply of wire to the liquid transport element and winding the wire thereon. Thus, the production of heating elements

may be relatively expensive and/or slow due to the repeated starting and stopping involved during the production process.

Accordingly, the present disclosure provides embodiments of methods of forming atomizers and related structures and atomizers produced thereby, which are configured to avoid the problems associated with the above-noted start and stop winding process. The heating elements produced in accordance with the description provided below may be employed with a variety of smoking articles. However, the heating elements may, by way of example, be employed in embodiments of the above-described smoking articles.

FIG. 13 illustrates an input 400 for production of a plurality of atomizers. As illustrated, the input 400 comprises a liquid transport element 402 and a wire 404. The liquid transport element 402 and the wire 404 may comprise any suitable material, such as one of the example embodiments of materials described above. Further, the particular cross-sectional shape of the liquid transport element 402 and the wire 404 may vary, and the cross-sectional areas thereof may be constant or vary along the length thereof. In this regard, the liquid transport element 402 and the wire 404 and the various other liquid transport elements and wires described herein may define substantially round cross-sectional shapes having substantially constant cross-sectional areas along the longitudinal lengths thereof. However, various other embodiments of cross-sectional shapes may be employed, such as square, rectangular, or triangular.

As illustrated, the wire 404 continuously extends along a longitudinal length of the liquid transport element 402. As used herein, the term continuously extending refers to a relationship between the liquid transport element 402 and the wire 404 in which the wire is coextensive along the longitudinal length of the liquid transport element. By contrast, the term continuously extending excludes the above-described embodiments of heating elements produced by start and stop winding methods and which extend along only a portion of the longitudinal length of the atomizer.

Thus, the wire 404 according to the present disclosure defines a plurality of heating elements 406 along the longitudinal length of the input 400. The input 400 may be cut at spaced intervals to define a plurality of atomizers 408 respectively comprising a segment of the liquid transport element 402 and one of the heating elements 406 defined by the wire 404. In this regard, the input 400 may be cut along the lines 410 to separate the input 400 into the atomizers 408. Due to the wire 400 continuously extending along the longitudinal length of the liquid transport element 402 in the input 400, the wire will also continuously extend along the longitudinal length of the segment of the liquid transport element when divided into individual atomizers 408.

As further illustrated in FIG. 13, the wire 404 may define a plurality of coils 412. In some embodiments, as illustrated in FIG. 13, the wire 404 may be continuously wound about the liquid transport element 402. The term continuously wound, as used herein, refers to a wound configuration in which the angular position of the wire 404 about the liquid transport element 402 continuously changes along the longitudinal length of the liquid transport element. Thus, the wire 404 may repeatedly wrap about the perimeter of the liquid transport element 402, as illustrated in FIG. 13 with the coils 412 continuously extending along the longitudinal length thereof. Thus, a plurality of interconnected heating elements may be formed by a single wire. In other words, a single wire may extend along and define a plurality of heating elements, each respectively useable as an atomizer.

FIG. 14 illustrates an enlarged view of the input 400 at section A from FIG. 13, including a view of one of the heating elements 406. As illustrated, in addition to the heating element 406, the wire 404 may define a first end portion 414a and a second end portion 414b (collectively, “end portions 414”). Further, the heating element 406 may comprise a first contact portion 416a and a second end portion 416a (collectively, “contact portions 416”) and a heating portion 418. The contact portions 416 may be positioned between the end portions 414 and the heating portion 418 may be positioned between the contact portions.

The coils 412 may define a pitch and coil spacing that varies along the longitudinal length of each atomizer 408. Pitch refers to a distance from a center of one coil 412 to a center of an adjacent coil, whereas coil spacing refers to a distance between adjacent coils. In this regard, a smaller pitch corresponds to a smaller coil spacing between the coils 412 and a larger pitch corresponds to a larger coil spacing between the coils. The coils 412 of the end portions 414 (or “end portion coils”), may define a first pitch 420, the coils of the contact portions 416 may define a second pitch 422, and the coils of the heating portion 418 may define a third pitch 424.

Thus, although not required, in some embodiments the pitch 420 of the first end portion 414a may be substantially equal to the pitch of the second end portion 414b. Similarly, although not required, the pitch 422 of the first contact portion 416A may be substantially equal to the pitch of the second contact portion 416B. Further, it should be noted that transitions between the end portions 414 and the contact portions 416 and between the contact portions and the heating portion 418 may result in the pitch of the coils 412 varying over the length of the individual portions. In this regard, the pitch of the coils of a particular portion of the wire 404, as used herein, refers to an average pitch of the coils over the length of the referenced portion. However, it should be understood that such variations in pitch at transitions between various portions of the wire 404 (e.g., transitions between the end portions 414 and the contact portions 416 and transitions between the contact portions and the heating portion 418) do not constitute a “variable coil spacing,” as this term is used below, in relation to those individual portions of the wire.

In some embodiments the second pitch 422 may be less than the first pitch 420, and the third pitch 424 may be less than the first pitch and greater than the second pitch. As described below, this configuration of the pitches 420, 422, 424 of the end portions 414, the contact portions 416, and the heating portion 418 may provide particular benefits in terms of the functionality and cost of the atomizers 408. In one embodiment the second pitch 422 of the contact portions 416 may be substantially equal to a cross-sectional width of the wire 404. For example, in embodiments in which the wire 404 defines a round cross-section, the second pitch 422 may be substantially equal to a diameter of the wire. This pitch corresponds to a configuration in which the coils 412 of the wire 404 are substantially in contact with one another. As described below, this configuration may have certain advantages. However, various other embodiments of pitches of the coils may be employed in other embodiments.

In one embodiment a ratio of the third pitch 424 to the second pitch 422 may be from about two through eight to one, and in one embodiment about four to one. The ratio of the first pitch 420 to the second pitch 422 may be from about eight through thirty-two to one, and in one embodiment about sixteen to one. The ratio of the first pitch 420 to the

25

third pitch **424** may be from about one through sixteen to one, and in one embodiment about four to one.

The input **400** may be employed to relatively inexpensively and rapidly produce atomizers **408**. In this regard, by coupling the wire **404** to the liquid transport element **402** in a manner by which the wire continuously extends along the longitudinal length of the liquid transport element, the input **400** may be produced continuously to the extent of the length of the material defining the wire and the liquid transport element. Thereafter, or concurrently therewith, the input **400** may be divided into the plurality of atomizers **408**. Thus, the atomizers **408** may be more efficiently produced as compared to the above-described stop and start winding process or other embodiments of processes that require discrete production of heating elements.

As noted above, the input **400** may be divided into a plurality of atomizers **408**. As illustrated in FIG. 15, when the input **400** is divided into a plurality of atomizers **408**, the wire **404** extends from a first liquid transport element end **426a** to a second liquid transport element end **426b** (collectively, “liquid transport element ends **426**”). In this regard, the wire **404** continuously extends along the entirety of the longitudinal length of the liquid transport element **402**.

More particularly, FIG. 15 illustrates attachment of the atomizer **408** to certain components of the above-described cartridge **200**. In this regard, the atomizer **408** may be employed in use in a variety of aerosol delivery devices, such as cartridges for smoking articles. Thus, use of the atomizer **408** with components previously described and included in the cartridge **200** is illustrated by way of example, and it should be understood that the atomizers **408** produced from the input **400** may be employed in a variety of other aerosol delivery devices.

As illustrated in FIG. 15, during assembly of a cartridge, in some embodiments the heater terminals **220** may be coupled to the base **202** prior to coupling the atomizer **408** to the heater terminals. In this regard, the base **202** may be employed to hold the heater terminals **220** in place so as to facilitate attachment of the atomizer **408** to the heater terminals. However, in other embodiments the heater terminals **220** may be coupled to the atomizer **408** prior to coupling the heater terminals to the base **202**. As further illustrated in FIG. 15, the contact portions **416** of the heating element **406** may respectively contact one of the heater terminals **220**. More particularly, the contact portions **416** of the heating element **406** may respectively contact one of the tabs **234** of the heater terminals **220**. The tabs **234** may be connected to the connector portions **416** of the heater element **406** by crimping, welding, or any other method or mechanism.

The contact portions **416** may define a plurality of coils **412**. In the illustrated embodiment (see, e.g., FIG. 14), the contact portions **416** respectively comprise 4 coils. However, various other numbers of coils **412** may be employed in other embodiments. By way of example, in some embodiments the contact portions **416** may comprise from about 3 coils to about 5 coils. Use of a plurality of coils **412** may assist in forming a connection with the tabs **234** of the heater terminals **220**. Further, providing the contact portions **416** with a relatively small pitch **422**, for example in which the coils **412** thereof touch one another, may further facilitate establishing an electrical connection between the contact portions and the heater terminals **220**. In this regard, the wire **404** may define a relatively greater surface area at the contact portions **416**, which may facilitate connection to the tabs **234**.

26

Further, the liquid transport element **402** may be bent about the heater terminals **220** such that the liquid transport element ends **426** are positioned proximate the base **202**. As the liquid transport element **402** is bent about the heater terminals **220**, the end portions **414** of the wire **404** may also bend and come into contact with the heater terminals. Since the wire **404** extends from the first liquid transport element end **426a** to the second liquid transport element end **426b**, the wire may assist in maintaining the liquid transport element **402** in the bent configuration. In this regard, as the liquid transport element **402** is bent, the wire **404** may plastically deform and retain the bent configuration. Thus, coupling between the liquid transport element **402** and the heater terminals **220** may be improved.

FIG. 16 illustrates a modified cross-sectional view through a cartridge **500** comprising the components of the cartridge **200** illustrated in FIG. 2, with the atomizer **208** replaced with the atomizer **408** produced from the input **400**. Thus, as illustrated, the cartridge **500** includes the base **202** defining the connector end **246** configured to engage a control body. Further, the cartridge **500** includes the reservoir substrate **210** configured to hold an aerosol precursor composition. The reservoir substrate **210** defines the cavity **252** extending between the first reservoir end **254a** and the second reservoir end **254b**, wherein the first reservoir end is positioned proximate the base **202**.

The atomizer **408** may extend through the cavity **252** of the reservoir substrate **210**. The reservoir substrate **210** may define the grooves **256** at the cavity **252** extending from the first reservoir end **254a** to the second reservoir end **254b**. In this regard, the atomizer **408** may define the above-described bent configuration in which the liquid transport element **402** and the wire **404** are bent about the heater terminals **220**. As illustrated, the liquid transport element **402** may define a first distal arm **428a** and a second distal arm **428b** (collectively, “distal arms **428**”) and a center section **428c**.

The distal arms **428** of the liquid transport element **402** may be received in the grooves **256** at the cavity **252**. As further illustrated in FIG. 16, the end portions **414** of the wire **404** may also be respectively received in the grooves **256**. In this regard, the end portions **414** of the wire **404** may be at least partially positioned between the liquid transport element **402** and the reservoir substrate **210**. However, as a result of employing a relatively coarse wind at the end portions **414**, in which the pitch **420** is relatively large, the reduction in fluid transfer from the reservoir substrate **210** to the liquid transport element **402** may be relatively small. In this regard, in the illustrated embodiment, each of the end portions **414** defines six coils **412**, which are spread across a relatively greater longitudinal length of the liquid transport element **404** than the contact portions **416**. However, in other embodiments the end portions may define a smaller number or a larger number of the coils. By way of example, the end portions may comprise from about two coils to about seven coils in some embodiments. It is further of note that employing a relatively large pitch **420** of the coils **412** at the end portion **414** may reduce the material costs associated with the atomizer **408** by reducing the amount of the wire **404** employed to produce the atomizers.

Further, as a result of the end portions **414** of the wire **404** being in contact with the heater terminals **220**, an electrical connection is formed therebetween. However, the end portions **414** of the wire **404** will be at substantially the same electrical potential as the heater terminals **220**, and hence the end portions of the wire will substantially avoid producing any heat. In this regard, the first end portion **414a** will be at

substantially the same electrical potential as the first contact portion **416a**, and the second end portion **414b** will be at substantially the same electrical potential as the second contact portion **416b** because the contact portions **416** are also in contact with the heater terminals **220**. Accordingly, despite the wire **404** extending to the liquid transport element ends **426**, heat may only be produced at the heating portion **418**. Accordingly, the heating element **406** may directly heat only the center section **428c** of the liquid transport element **402**, which may be desirable to control the production of aerosol by controlling the amount of aerosol precursor exposed to the heat produced by the heating element **406**.

Further, the amount of heat directed to the center section **428c** of the liquid transport element **402** may be controlled by the pitch **424** of the coils **412** at the heating portion **418** of the wire. In this regard, the pitch **424** of the coils **412** may be relatively less than the pitch **420** of the coils at the end sections **414** but greater than the pitch **422** of the coils at the contact portions **416**. By ensuring that the coils **412** are not spaced too far apart, the liquid transport element **402** may be heated to a sufficient degree to produce aerosol vapors. Further, by providing gaps between the coils **412** at the heating portion **418**, the vaporized aerosol may be able to escape from the liquid transport element **402**. In the illustrated embodiment the heating portion **418** comprises six coils **412**. However, a larger or smaller number of coils may be provided in other embodiments. For example, the heating portion may comprise from about four coils to about twelve coils in other embodiments.

Note that the above-described atomizer may be employed in a variety of embodiments of cartridges for aerosol delivery devices. In this regard, FIG. 17 illustrates a partially exploded view of an aerosol delivery device **600** including a control body **700**, which is illustrated in an assembled configuration, and a cartridge **800**, which is illustrated in an exploded configuration. The control body **700** may include various components as described above. For example, the control body **700** may include an outer tube **702** (which may or may not be tubular, and which may also be referred to as an outer body) and a receptacle or coupler **704** and an end cap **706** coupled to opposing ends of the outer tube. Various internal components inside the outer tube **702** may include, by way of example, a flow sensor, a control component, and an electrical power source (e.g., a battery), and a light emitting diode (LED) element. However, the control body **700** may include additional or alternative components in other embodiments.

As illustrated, the cartridge **800** may comprise a base shipping plug **802**, a base **804**, a control component terminal **806**, an electronic control component **808**, a flow tube **810** (which may or may not be tubular, and which may also be referred to as a flow director), an atomizer **812**, a reservoir substrate **814**, an external shell **816**, a label **818**, a mouthpiece **820**, and a mouthpiece shipping plug **822** according to an example embodiment of the present disclosure. Many of these components are substantially similar to the components of the cartridges described above. Accordingly, only differences with respect to the previously-described embodiments of cartridges will be described below.

In this regard, in one embodiment the electronic control component **808** may comprise a single-piece printed circuit board assembly. The electronic control component **808** may include a ceramic substrate, which may comprise about 96% alumina ceramic in one embodiment. This material is inorganic, non-reactive, non-degrading, and non-porous. Use of such a ceramic material may be preferable in that it may

define a robust, dimensionally-stable part without requiring a separate supporting structure. Further, such a ceramic material may allow for adhesion of a coating thereto. For example, a component side of the electronic control component **808** may comprise a coating material such as a chloro-substituted poly (para-xylylene) commercially available as Parylene C from Specialty Coating Systems, Inc., or any other coating or other sealant/barrier coating configured to protect components of the circuit board from liquid and moisture. The sealant/barrier coating may also provide the electronic control component **808** with a decreased coefficient of friction, which may facilitate an axial assembly process of the cartridge **800**.

Further, the mouthpiece shipping plug **822** is configured to engage openings in the mouthpiece **820** prior to use of the cartridge **800** in order to prevent entry of contaminants through the openings in the mouthpiece. Similarly, the base shipping plug **802** is configured to couple to an inner periphery of the base **804** to protect the base from damage or contamination during transport and storage. Further, the label **818** may serve as an exterior member providing the cartridge **800** with identifying information.

FIG. 18 illustrates a perspective view of the cartridge **800** in a partially assembled configuration. More particularly, FIG. 18 illustrates components of the cartridge **800** in a partially assembled configuration corresponding to the configuration illustrated in FIG. 8. Thus, briefly, FIG. 18 illustrates a configuration in which the control component terminal **806** has been coupled to the base **804**, the electronic control component **808** has been coupled to the electronic control component terminal, a first heater terminal **834a** and a second heater terminal **834b** (collectively, "heater terminals **834**") has been coupled to the base, the flow tube **810** is received between the heater terminals, a heating element **840** is wound about a liquid transport element **838** and extends along the length thereof, the heating element is coupled to first and second tabs **836a**, **836b** of the heater terminals to complete the atomizer **812**, and the reservoir substrate **814** is received around the atomizer.

The reservoir substrate **814** may define a cavity **852** extending therethrough from a first reservoir end **854a** to a second reservoir end **854b** (collectively, "reservoir ends **854**"), wherein the first reservoir end is positioned proximate the base **804**. In this regard, the reservoir substrate **814** may define a hollow tubular configuration. The reservoir substrate **814** can comprise one or more of various materials and can be formed in a variety of different manners. In one embodiment the reservoir substrate **814** can be formed from a plurality of combined layers that can be concentric or overlapping. For example, the reservoir substrate **814** can be a continuous sheet of a material that is rolled such that the ends thereof meet along a joint **856** to form the hollow tubular configuration, or multiple layers of the material may be wrapped thereabout. Thus, the reservoir substrate **814** may or may not conform to the shape of the components received in the cavity **852** such as the atomizer **812**.

As illustrated in FIGS. 17 and 18, in some embodiments the cartridge **800** may additionally include the flow tube **810**. As illustrated in FIG. 18, the flow tube **810** may be positioned between, and held in place by, the terminals **834**. More particularly, the flow tube **810** may define first **858a** and second **858b** opposing grooves (collectively, "grooves **858**"). The grooves **858** may be sized and shaped to respectively receive one of the terminals **834** therein. In this regard, in some embodiments the flow tube **810** may define a generally round outer perimeter, with the exception of the grooves **858**. Thus, the flow tube **810** may be received inside

the cavity **852** defined through the reservoir substrate **814**. Accordingly, the flow tube **810** may additionally or alternatively be held in place by the reservoir substrate **814**. The flow tube **810** may also be held in place via contact with the electronic control component **808** in some embodiments.

The flow tube **810** may be configured to direct a flow of air received from the base **804** to the heating element **840** of the atomizer **812**. More particularly, as illustrated in FIG. **18**, the flow tube **810** may define a through hole **860** extending along the length of the center of the flow tube configured to receive air from the base **804** and direct it to the heating element **840**. Accordingly, the size of the through hole **860** may be selected to define a desired velocity of air directed to the heating element **840**. Accordingly, a desired amount of aerosol may be delivered to the air as the air passes the heating element **840**. For example, the through hole **860** may taper from a relatively larger diameter to a relatively smaller diameter proximate the heating element **840**. However, in other embodiments the through hole **860** may define a substantially constant or increasing diameter.

In some embodiments the flow tube **810** may comprise a ceramic material. For example, the flow tube **810** may comprise 96.5% aluminum tri oxide in one embodiment. This material may provide heat resistance which may be desirable due to proximity to the heating element **840**. However, the flow tube **810** may be formed from various other materials in other embodiments.

The reservoir substrate **814** includes an exterior surface **862** that can be substantially shaped and adapted to conform to an interior surface of the external shell **816** (see, FIG. **17**). Accordingly, the external shell **816** may be received over the reservoir substrate **814** and coupled to the base **804**. In a fully assembled configuration the cartridge may appear substantially similar to the cartridge **200** illustrated in FIG. **10** with the base shipping plug, the mouthpiece shipping plug, and the label coupled thereto prior to usage.

Although a wire is generally described above as being continuously wound about a liquid transport element, the wire may be configured in various other manners in which the wire continuously extends along the longitudinal length of the liquid transport element in other embodiments. In this regard, FIG. **19** illustrates an enlarged view of a portion of an input **900** comprising a liquid transport element **902** and a wire **904** extending along the longitudinal length of the liquid transport element. As illustrated, the wire **904** may be wound about the liquid transport element **902** to define a heating element **906**. The wire **904** may define a plurality of coils **912** wound about the liquid transport element **902** at the heating element **906**.

In addition to the heating element **906**, the wire **904** may define a first end portion **914a** and a second end portion **914b** (collectively, "end portions **914**"). Further, the heating element **906** may comprise a first contact portion **916a** and a second contact portion **916b** (collectively, "contact portions **916**") and a heating portion **918**. The contact portions **916** may be positioned between the end portions **914** and the heating portion **918** may be positioned between the contact portions.

Thus, the liquid transport element **902** and the contact portions **916** and the heating portion **918** of the input **900** may be substantially similar to the corresponding components of the input **400** described above, and hence additional details with respect to these components will not be repeated for purposes of brevity. However, whereas the embodiment of the input **400** illustrated in FIG. **14** includes a plurality of coils **412** at the end portions **414**, the end portions **914** of the input **900** illustrated in FIG. **19** may not include coils.

Rather, as illustrated in FIG. **19**, in some embodiments the end portions **914** may extend substantially parallel to the longitudinal length of the liquid transport element **902**. In this regard, the end portions of the atomizers described herein may define a plurality of configurations. Embodiments in which the end portions are wound about the liquid transport element may be desirable in that coils positioned at the end sections may assist in retaining a coupling between the wire and the liquid transport element and retaining the atomizer in a bent configuration, as described above. However, embodiments in which the end portions of the wire extend substantially parallel to the longitudinal length of the liquid transport element may be desirable in that less wire may be needed to produce the atomizers, and hence material costs may be further reduced.

A method of forming a plurality of atomizers is also provided. As illustrated in FIG. **20**, the method may comprise providing a liquid transport element at operation **1002**. Further, the method may include providing a wire at operation **1004**. The method may additionally include coupling the wire to the liquid transport element such that the wire extends continuously along a longitudinal length of the liquid transport element and defines a plurality of heating elements at operation **1006**, the heating elements respectively comprising a plurality of coils of the wire.

In some embodiments coupling the wire to the liquid transport element at operation **1006** may comprise continuously winding the wire about the liquid transport element. Further, winding the wire about the liquid transport element may comprise winding the wire to define a plurality of end portions defining a first pitch and winding the wire such that each of the heating elements comprises a plurality of contact portions positioned between the end portions and defining a second pitch and a heating portion positioned between the contact portions and defining a third pitch. The second pitch may be less than the first pitch, and the third pitch may be less than the first pitch and greater than the second pitch. In some embodiments the second pitch may be substantially equal to a diameter of the wire.

In some embodiments, during winding of the wire about the liquid transport element, the tension on one or both of the liquid transport element and the wire may be controlled. In this regard, winding the wire too loosely about the liquid transport element may result in the heating portion being out of contact with the liquid transport element, which could result in high temperatures of the heating element and poor vaporization during operation of the resultant atomizer. Further, winding the wire too tightly about the liquid transport element may result in impediment of the fluid flow through the liquid transport element. Accordingly, the tensions on the wire and the liquid transport element may be maintained at such levels wherein the wire remains in contact with the liquid transport element but does not substantially compress the liquid transport element.

In some embodiments the method may further comprise cutting the liquid transport element and the wire at one of the end portions to separate one of the heating elements and a segment of the liquid transport element therefrom at operation **1008**. Further, the method may include providing a first heater terminal and a second heater terminal at operation **1010** and respectively engaging the contact portions of the one of the heating elements with the first heater terminal and the second heater terminal at operation **1012**. Additionally, the method may include bending the one of the heating elements and the segment of the liquid transport element about the first heater terminal and the second heater terminal at operation **1014**. The method may also include engaging

the end portions with one of the first heater terminal and the second heater terminal at operation **1016**.

Additional embodiments of atomizers are also provided herein. In this regard, FIG. **21** illustrates an alternate embodiment of an input **1100** for production of a plurality of atomizers. As illustrated, the input **1100** comprises a liquid transport element **1102** and a wire **1104**, wherein the wire continuously extends along a longitudinal length of the liquid transport element. The wire **1104** may be wound about the liquid transport element **1102** to define a plurality of coils **1112**. Further, the wire **1104** defines a plurality of heating elements **1106** along the longitudinal length of the input **1100**. Thus, the input **1100** may be cut at spaced intervals (e.g., at lines **1110**) to define a plurality of atomizers respectively comprising a segment of the liquid transport element **1102** and one of the heating elements **1106** defined by the wire **1104**.

FIG. **22** illustrates an enlarged partial view of the input **1100** at section B from FIG. **21**, including a view of one of the heating elements **1106**. As illustrated, in addition to the heating element **1106**, the wire **1104** may define a first end portion **1114a** and a second end portion **1114b** (collectively, “end portions **1114**”). Further, the heating element **1106** may comprise a first contact portion **1116a** and a second end portion **1116b** (collectively, “contact portions **1116**”) and a heating portion **1118** positioned between the contact portions. The coils **1112** may define a pitch and a coil spacing that varies along the longitudinal length of each atomizer. The coils **1112** of the end portions **1114** (or “end portion coils”), may define a first pitch **1120** and the coils of the contact portions **1116** may define a second pitch **1122**, which is less than the first pitch. As described above, this configuration of the pitches **1120**, **1122** of the end portions **1114** and the contact portions **1116** may provide particular benefits in terms of the functionality and cost of the resultant atomizers.

Thus, the input **1100** illustrated in FIGS. **21** and **22** may be substantially similar to the input **400** illustrated in FIGS. **13** and **14** in a number of aspects. Accordingly, only differences between the input **1100** illustrated in FIGS. **21** and **22** and the input **400** illustrated in FIGS. **13** and **14** are highlighted herein. In this regard, the coils **1112** of the heating portion **1118** may define a variable pitch and a variable coil spacing.

For example, as illustrated in FIG. **22**, the heating portion **1118** may define a plurality of outer sections **1126a**, **1126b** (collectively, “outer sections **1126**”) positioned between the contact portions **1116**. Further, the heating portion **1118** may define a center section **1128** positioned between the outer sections **1126**. As illustrated, a pitch **1130** of the outer sections **1126** of the coils **1112** at the heating portion **1118** may be greater than a pitch **1132** of the coils at the center section **1128**. More particularly, in the illustrated embodiment the pitch of the coils **1112** at the heating portion **1118** may be greatest at the outer sections **1126** and smallest at the center section **1128**. In one embodiment a ratio of the pitch **1130** of the coils **1112** at the outer sections **1126** to the pitch **1132** of the coils at the center section **1128** may be from about two to one to about eight to one, and in one embodiment about four to one. The ratio of the first pitch **1120** of the coils **1112** at the end portions **1114** to the pitch **1130** of the coils at the outer sections **1126** of the heating portion **1118** may be from about four to one to about one to one, and in one embodiment about two to one. Note that reference numeral **1130** references approximately one half of the pitch of the outer sections **1126** in FIG. **22**, as opposed to the complete pitch thereof, as a result of the outer sections **1126** respectively defining about one coil in the illustrated

embodiment. In this regard, in some embodiments the outer sections **1126** may define about one coil (e.g., from about one-half coil to about two coils) and the center section **1128** may define about four coils (e.g., from about 2 coils to about 6 coils). In one embodiment the center section **1128** may define a width from about 0.01 inches to about 0.05 inches. Additionally the outer sections **1126** may each define a width from about 0.03 to about 0.1 inches. Further in some embodiments the heating portion **1118** may define a width from about 0.1 inches to about 0.2 inches.

Transitions between the end portions **1114** and the contact portions **1116**, and between the contact portions and the heating portion **1118** may result in the pitch of the coils **1112** varying over the length of these individual portions. In this regard, the pitch of the coils **1112** of a particular portion or section of the wire **1104**, as used herein, refers to an average pitch of the coils over the length of the referenced portion or section. However, it should be understood that such variations in pitch at transitions between various portions of the wire **1104** (e.g., transitions between the end portions **1114** and the contact portions **1116** and between the contact portions and the heating portion **1118**) do not constitute a “variable coil spacing” or a “variable pitch” in reference to those individual portions, as those terms are used herein. In contrast, the differing pitches **1130**, **1132** at the outer sections **1126** and the center section **1128** define a variable coil spacing and variable pitch at the heating portion **1118** of the heating element **1106**.

Accordingly, the terms “variable coil spacing” and “variable pitch” refer to a coil spacing/pitch that changes across the referenced portion (e.g., across the heating portion in the previously-described example), wherein the change in coil spacing/pitch is not a result of the referenced portion being positioned adjacent to one or more portions defining a different coil spacing. In other words, as noted above, transitions between portions of the wire **1104** having differing coil spacings/pitches do not themselves constitute a variable coil spacing/pitch within the meaning of these terms as used herein. Note also that the terms “variable coil spacing” and “variable pitch” do not require that the coil spacing/pitch constantly change across the referenced portion. Thus, for example, part of a portion of the wire **1104** defining a “variable coil spacing” and “variable pitch” may define a constant coil spacing/pitch.

Further, although not required, in some embodiments the pitch **1120** of the first end portion **1114a** may be substantially equal to the pitch of the second end portion **1114b**. Similarly, although not required, the pitch **1122** of the first contact portion **1116A** may be substantially equal to the pitch of the second contact portion **1116B**. Additionally, although not required, the pitch **1130** of the first outer section **1126a** may be substantially equal to the pitch of the second outer section **1126b**.

In one embodiment the second pitch **1122** of the contact portions **1116** may be substantially equal to a cross-sectional width of the wire **1104**. For example, in embodiments in which the wire **1104** defines a round cross-section, the second pitch **1122** of the contact portions **1116** may be substantially equal to a diameter of the wire. This pitch corresponds to a configuration in which the coils **412** of the wire **404** are substantially in contact with one another, which may facilitate coupling of the contact portions **1116** to heater terminals.

Further, in one embodiment the pitch **1132** of the coils **1112** at the center section **1128** of the heating portion **1118** of the heating element **1106** may be greater than the pitch **1122** of the coils at the contact portions **1116**. In this regard,

whereas contact between the coils **1112** at the contact portions **1116** may facilitate coupling to heat terminals, contact between the coils at the heating portion **1118** of the heating element **1106** may be undesirable. In this regard, contact between the coils **1112** at the heating portion **1118** of the heating element **1106** may cause current flowing through the wire **1104** to bypass part of one or more of the coils **1112**, such that less than a desired amount of heat is produced. Thus, by way of example, in one embodiment a ratio of the pitch **1132** of the coils **1112** at the center section **1128** to the pitch **1122** of the coils at the contact portions **1116** may be from about four to three to about four to one. Thus, the coils **1112** at the center section **1128** may be relatively close to one another in order to produce a relatively large amount of heat, while not contacting one another, in order to avoid current short circuiting between adjacent coils.

The input **1100** may be divided at selected intervals and attached to heater terminals in the manner described above. For example, FIG. **23** illustrates a partially cutaway view of an aerosol production assembly **1200**. The aerosol production assembly includes an atomizer **1108**, which may be cut from the input **1100**, a flow director **1210**, and a reservoir substrate **1214** in contact with the liquid transport element **1102** of the atomizer. The aerosol production assembly **1200** and other aerosol production assemblies including components described herein may be employed in a cartridge for an aerosol delivery device. An example embodiment of an aerosol delivery device employing a cartridge is described in U.S. patent application Ser. No. 13/841,233; Filed Mar. 15, 2013, to DePiano et al., which is incorporated herein by reference in its entirety. In other embodiments the aerosol production assembly **1200** and other aerosol production assemblies including components described herein may be employed in aerosol delivery devices which are disposable or which otherwise do not include a cartridge configured to be replaceable. An example embodiment of a disposable aerosol delivery device is described in U.S. patent application Ser. No. 14/170,838, filed Feb. 3, 2014, to Bless et al., which is incorporated herein by reference in its entirety, as noted above.

As further illustrated in FIG. **23**, the contact portions **1116** of the wire **1104** respectively contact and are coupled (e.g., crimped or welded) to first and second tabs **1234a**, **1234b** (collectively, “tabs **1234**”) of first and second heater terminals **1220a**, **1220b** (collectively, “heater terminals **1220**”). In this configuration, the center section **1128** of the heating portion **1118** of the heating element **1106** may be aligned with an aperture **1260** extending through the flow director **1210**. More particularly, the center section **1128** of the heating portion **1118** of the heating element **1106** may be aligned with a central axis **1262** of the aperture **1260** extending through the flow director **1210**. In this regard, airflow through the flow director **1210** may define a greatest velocity proximate the central axis **1262** of the aperture **1260**. Accordingly, the center section **1128** of the heating portion **1118** of the heating element **1106** may be located at a position at which the velocity of the airflow past the heating element is greatest.

In this regard, the position of the center section **1128** of the heating portion **1118** of the heating element **1106** may be selected based on, and aligned with, a location at which a peak velocity of air exists in or exits from the flow director **1210**. Further, the pitch and spacing of the coils **1112** of the wire **1104** may be selected based on an expected air velocity profile through and/or exiting from the flow director **1210** caused by a draw on an aerosol delivery device incorporating the aerosol production assembly **1200**. In this regard, as

described above, the pitch **1132** of the coils **1112** at the center section **1128** may be less than the pitch **1130** of the coils at the outer sections **1126** of the heating portion **1118** in order to produce heat in a pattern corresponding to a relatively greater air velocity proximate the center section of the heating portion as compared to the air velocity proximate the outer sections. In another embodiment the pitch of the coils across the heating portion may substantially constantly vary in relation to the expected air velocity profile across the aperture **1260** through the flow director **1210**. Regardless, by either approximating or substantially matching the pitch of the coils at the heating portion to an expected air velocity profile (with smaller pitches being employed proximate locations with greater air velocities and vice versa), the amount of heat produced at any individual point on the heating portion of the heating element may substantially correspond to the quantity of air flowing there past during a puff on the aerosol delivery device. Thus, less electrical current may be wasted in atomizing the aerosol precursor composition and/or the aerosol may be produced more efficiently.

The above-described heating element including a heating portion defining a variable coil spacing may be employed in any of various embodiments of atomizers. For example, FIG. **24** illustrates a portion of an input **1100'** for production of a plurality of atomizers that is substantially similar to the input **1100** illustrated in FIGS. **21** and **22**, except that the input includes first and second end portions **1114a'**, **1114b'** (collectively, “end portions **1114**”) that are not coiled about the liquid transport element **1102**. Instead, the end portions **1114'** of the wire **1104** extend substantially parallel to the longitudinal length of the liquid transport element **1102** as described above with respect to the embodiment of the input **900** illustrated in FIG. **19**.

Additional embodiments of atomizers according to the present disclosure may be formed in differing manners and/or define a differing structure. In this regard, FIG. **25** illustrates an enlarged partial view of an embodiment of an atomizer **1300** comprising a liquid transport element **1302** and a wire **1304** wound about the liquid transport element to define a heating element **1306**. The heating element **1306** comprises a plurality of coils **1308** of the wire **1304**.

The wire **1304** extends between and terminates at first and second wire ends **1310a**, **1310b** (collectively, “wire ends **1310**”). The liquid transport element **1302** extends between first and second liquid transport ends **1326a**, **1326b** (collectively, “liquid transport ends **1326**”), which are truncated in the illustrated partial view. As illustrated, in this embodiment the wire **1304** may not extend to the liquid transport ends **1326**. Rather, the wire **1304** may extend along a portion of the longitudinal length of the liquid transport element **1302**, and terminate at the wire ends **1310** positioned inwardly from the liquid transport ends **1326**.

The wire **1304** may extend at least partially through the liquid transport element **1302** at one or both of the wire ends **1310**. For example, one or both of the wire ends **1310** may extend completely through the liquid transport element **1302**. In some embodiments, one or both of the wire ends **1310** may extend through the liquid transport element **1302** substantially transversely to a longitudinal length of the liquid transport element. In this regard, FIG. **25** illustrates the first wire end **1310a** extending through the liquid transport element **1302**. By directing (e.g., inserting) an end of the wire **1304** through the liquid transport element **1302**, the heating element **1306** may be held in place thereon such that rotational and longitudinal movement of the completed heating element is substantially prevented. Further, insertion

of the first wire end **1310a** may facilitate formation of the heating element **1306**. For example, following insertion of the first wire end **1310a** through the liquid transport element **1302**, one or both of the liquid transport element and the wire **1304** may be rotated to define the coils **1308** of the heating element **1306**.

As further illustrated in FIG. **25**, the second wire end **1310b** may be secured in a number of manners. For example, the second wire end **1310b** may extend through the liquid transport element **1302**, as illustrated at portion **1312** of the wire **1304** at the second wire end **1310b**. In another embodiment, the second wire end **1310b** may be coupled to one or more adjacent coils **1308**. For example, a weld **1314** may secure the second wire end **1310b** to one or more adjacent coils **1308** of the wire **1304**, or the second wire end may be crimped to or otherwise engaged with one or more adjacent coils. In an additional embodiment, the second wire end **1310b** may terminate without extending through the liquid transport element **1302** and without being coupled to adjacent coils **1308**.

The atomizer **1300** may include features of the atomizers described elsewhere herein. For example, in the embodiment of the atomizer **1300** illustrated in FIG. **25**, the heating element **1306** comprises first and second contact portions **1344a**, **1344b** (collectively, “contact portions **1344**”) positioned proximate and between the wire ends **1310**. The atomizer **1300** may additionally include first and second heater terminals **1320a**, **1320b** (collectively, “heater terminals **1320**”). The heater terminals **1320** may include first and second tabs **1324a**, **1324b** (collectively, “tabs **1324**”) affixed (e.g., welded, crimped, or soldered) to a respective one of the contact portions **1344** of the heating element **1306**.

Further, the heating element **1306** may include a heating portion **1346** positioned between the contact portions **1344**. As illustrated, a pitch of the coils **1308** at the contact portions **1344** may be less than a pitch of the coils at the heating portion **1346**. Thus, the heating portion **1346** of the heating element **1306** may define a configuration substantially similar to that described above with respect to FIG. **14** and accordingly, details of this configuration will not be repeated in the interest of brevity.

FIG. **26** illustrates an alternate embodiment of an atomizer **1300'** that is substantially similar to the atomizer **1300** illustrated in FIG. **25**. Accordingly, only differences with respect to the atomizer **1300** illustrated in FIG. **25** will be described. In this regard, the atomizer **1300'** illustrated in FIG. **26** includes a heating portion **1346'** that defines a variable coil spacing. For example, the heating portion **1346'** may be substantially similar to the heating portion **1118** of the heating element **1106** illustrated in FIG. **22**. Thus, details of this configuration will not be repeated in the interest of brevity. Briefly, however, the variable pitch of the coils **1308** at the heating portion **1346'** may be greatest at first and second outer sections **1350a**, **1350b** (collectively, “outer sections **1350**”) and smallest at a center section **1352** positioned between the outer sections.

As described above, the wire ends **1310** of the atomizers **1300**, **1300'** illustrated in FIGS. **25** and **26** terminate inwardly of the liquid transport ends **1326**, proximate the contact portions **1344**. In this configuration the wire **1304** does not form end portions that extend to the liquid transport ends **1326**. Thus, less wire may be required to form the heating elements, which may reduce costs associated with material inputs.

A method of forming a plurality of atomizers is also provided. As illustrated in FIG. **27**, the method may include providing a liquid transport element at operation **1402**.

Further, the method may include providing a wire at operation **1404**. Additionally, the method may include coupling the wire to the liquid transport element at operation **1406** such that the wire extends along at least a portion of a longitudinal length of the liquid transport element and defines at least one heating element, the heating element comprising a plurality of coils of the wire including a heating portion at which the coils define a variable pitch. The variable pitch of the coils may be greatest at a plurality of outer sections and smallest at a center section positioned between the outer sections.

In some embodiments, coupling the wire to the liquid transport element at operation **1406** may comprise continuously winding the wire about the liquid transport element from a first liquid transport end to a second liquid transport end. In another embodiment, coupling the wire to the liquid transport element at operation **1406** may comprise inserting a first wire end at least partially through the liquid transport element, and rotating at least one of the wire and the liquid transport element. Coupling the wire to the liquid transport element at operation **1406** may further comprise inserting a second wire end at least partially through the liquid transport element. In some embodiments coupling the wire to the liquid transport element at operation **1406** may comprise winding the wire such that the heating element comprises a plurality of contact portions, the heating portion being positioned between the contact portions. Coupling the wire to the liquid transport element at operation **1406** may further comprise winding the wire to define a plurality of end portion coils defining a first pitch, the contact portions being positioned between the end portion coils and defining a second pitch that is less than the first pitch.

In some embodiments, coupling the wire to the liquid transport element at operation **1406** may comprise defining a plurality of heating elements. The method may further comprise cutting the liquid transport element and the wire to separate one of the heating elements and a segment of the liquid transport element therefrom at operation **1408**. The method may additionally include providing a first heater terminal and a second heater terminal at operation **1410**. Further, the method may include respectively engaging the contact portions of the heating element with the first heater terminal and the second heater terminal at operation **1412**.

Many modifications and other embodiments of the disclosure will come to mind to one skilled in the art to which this disclosure pertains having the benefit of the teachings presented in the foregoing descriptions and the associated drawings. Therefore, it is to be understood that the disclosure is not to be limited to the specific embodiments disclosed herein and that modifications and other embodiments are intended to be included within the scope of the appended claims. Although specific terms are employed herein, they are used in a generic and descriptive sense only and not for purposes of limitation.

The invention claimed is:

1. An input for production of a plurality of atomizers, the input comprising:
 - a U-shaped capillary action member having opposing first and second capillary action member ends and a center section therebetween; and
 - a wire continuously extending along a longitudinal length of at least a portion of the center section of the U-shaped capillary action member and defining a plurality of heating elements each comprising a plurality of coils of the wire, one of the heating elements having the plurality of coils defining a variable pitch and being

wound around the at least a portion of the center section of the U-shaped capillary action member, wherein the wire is supported along the at least a portion of the center section and is disposed in the gaps defined between each of a pair of tabs, the tabs being disposed adjacent to and spaced-apart along the center section of the U-shaped capillary action member, and the at least a portion of the center section of the U-shaped capillary action member such that a heating portion at which the plurality of coils define the variable pitch is disposed along the longitudinal length between the tabs.

2. The input of claim 1, wherein the variable pitch of the plurality of coils at the heating portion is greatest at a plurality of outer sections and smallest at a center section positioned between the plurality of outer sections.

3. The input of claim 2, wherein the plurality of heating elements further respectively comprise a plurality of contact portions, the heating portion being positioned between the plurality of contact portions.

4. The input of claim 3, wherein the wire further defines a plurality of end portion coils defining a first pitch, the plurality of contact portions being positioned between the plurality of end portion coils and defining a second pitch that is less than the first pitch.

5. An atomizer for an aerosol delivery device, the atomizer comprising:

a U-shaped capillary action member having a center section extending between a first capillary action member end and a second capillary action member end; and a wire extending along at least one portion of the center section of the U-shaped capillary action member and defining a heating element comprising a plurality of coils of the wire, the heating element having the plurality of coils defining a variable pitch and being wound around the at least one portion of the center section of the U-shaped capillary action member, the variable pitch of the plurality of coils being greatest at opposing outer sections of the heating element and smallest at a center section of the heating element positioned between the outer sections,

wherein the wire is supported along the at least one portion of the center section and is disposed in the gaps defined between each of a pair of tabs, the tabs being disposed adjacent to and spaced-apart along the center section of the U-shaped capillary action member, and the at least one portion of the center section of the U-shaped capillary action member such that a heating portion at which the plurality of coils define the variable pitch is disposed along the center section of the U-shaped capillary action member between the tabs.

6. The atomizer of claim 5, wherein the wire continuously extends from the first capillary action member end to the second capillary action member end.

7. The atomizer of claim 5, wherein the wire extends at least partially through the U-shaped capillary action member at one or both of first and second wire ends.

8. The atomizer of claim 5, wherein the heating element further comprises a plurality of contact portions, the heating portion being positioned between the plurality of contact portions.

9. The atomizer of claim 8, wherein the wire further defines a plurality of end portion coils defining a first pitch, the plurality of contact portions being positioned between the plurality of end portion coils and defining a second pitch that is less than the first pitch.

10. The atomizer of claim 8, further comprising a first heater terminal and a second heater terminal, wherein the

plurality of contact portions of the heating element respectively contact one of the first heater terminal and the second heater terminal.

11. An atomizer for an aerosol delivery device, the atomizer comprising:

a capillary action member; and a wire wound about the capillary action member to define a heating element comprising a plurality of coils of the wire, one or both of first and second ends of the wire extending into and at least partially through the capillary action member to prevent rotational and longitudinal movement of the heating element relative to the capillary action member.

12. The atomizer of claim 11, wherein the capillary action member extends between first and second capillary action member ends, and wherein the wire does not extend to the first and second capillary action member ends.

13. The atomizer of claim 11, wherein the first and second wire ends extend through the capillary action member transversely to a longitudinal length of the capillary action member.

14. The atomizer of claim 13, wherein the heating element comprises a plurality of contact portions positioned proximate the wire ends and a heating portion positioned between the plurality of contact portions.

15. The atomizer of claim 14, wherein a pitch of the plurality of coils at the plurality of contact portions is less than a pitch of the plurality of coils at the heating portion.

16. The atomizer of claim 14, wherein the plurality of coils at the heating portion define a variable pitch.

17. The atomizer of claim 16, wherein the variable pitch of the plurality of coils at the heating portion is greatest at a plurality of outer sections and smallest at a center section positioned between the plurality of outer sections.

18. The atomizer of claim 14, further comprising first and second heater terminals, each of the first and second heater terminals being affixed to a respective one of the plurality of contact portions of the heating element.

19. A method of forming an atomizer, the method comprising:

providing a U-shaped capillary action member having a center section extending between a first capillary action member end and a second capillary action member end; providing a wire;

coupling the wire to the U-shaped capillary action member such that the wire extends along at least a portion of the center section of the U-shaped capillary action member and defines a heating element, comprising a plurality of coils of the wire, and such that the plurality of coils defines a variable pitch and is wound around the at least a portion of the center section of the U-shaped capillary action member,

the variable pitch of the plurality of coils being greatest at opposing outer sections of the heating element and smallest at a center section of the heating element positioned between the outer sections; and

supporting the wire along the at least one portion of the center section such that the wire is disposed in gaps defined between each of a pair of tabs, the tabs being disposed adjacent to and spaced-apart along the center section of the U-shaped capillary action member, and the at least one portion of the center section of the U-shaped capillary action member, and such that a heating portion at which the plurality of coils defines the variable pitch is disposed along the center section of the U-shaped capillary action member between the tabs.

39

20. The method of claim 19, wherein coupling the wire to the U-shaped capillary action member comprises continuously winding the wire about the U-shaped capillary action member from a first capillary action member end to a second capillary action member end.

21. The method of claim 19, wherein coupling the wire to the U-shaped capillary action member comprises inserting a first wire end at least partially through the U-shaped capillary action member, and rotating at least one of the wire and the U-shaped capillary action member.

22. The method of claim 21, wherein coupling the wire to the U-shaped capillary action member further comprises inserting a second wire end at least partially through the U-shaped capillary action member.

23. The method of claim 19, wherein coupling the wire to the U-shaped capillary action member comprises winding the wire such that the heating element comprises a plurality of contact portions, the heating portion being positioned between the contact portions.

40

24. The method of claim 23, wherein coupling the wire to the U-shaped capillary action member further comprises winding the wire to define a plurality of end portion coils defining a first pitch, the contact portions being positioned between the end portion coils and defining a second pitch that is less than the first pitch.

25. The method of claim 23, further comprising providing a first heater terminal and a second heater terminal; and respectively engaging the contact portions of the heating element with the first heater terminal and the second heater terminal.

26. The method of claim 19, wherein coupling the wire to the U-shaped capillary action member comprises defining a plurality of heating elements.

27. The method of claim 26, further comprising cutting the U-shaped capillary action member and the wire to separate one of the heating elements and a segment of the U-shaped capillary action member therefrom.

* * * * *